

## PE6208

20A/16A 8-Outlet 1U Metered & Switched eco PDU

(PE6208A)



- 8 outlets
- 20A (UL derated 16A) / 16A
- [PDU](#) Power Measurement

The PE6208 eco [PDU](#) is intelligent [PDUs](#) that contains 8 AC outlets and is available in various IEC or NEMA socket configurations. It provides secure, centralized, intelligent, power management (power on, off, cycle) of [data center](#) IT equipment (servers, storage systems, KVM switches, network devices, serial data devices, etc.), as well as the ability to monitor the center's health environment via sensors\*.

The eco [PDUs](#) offer remote power control combined with real-time power measurement - allowing you to control and monitor the power status of devices attached to the [PDUs](#) at the [PDU](#) device level from practically any location via a TCP/IP connection.

The eco [PDU](#) supports any 3rd party v3 SNMP Manager Software and the [eco DC](#) (Energy Management Web GUI). The [eco DC](#) provides you with an easy method for managing multiple devices, offering an intuitive and user-friendly Graphical User Interface that allows you to configure a [PDU](#) device and monitor power status of the equipment connected to it. With the [eco DC](#), the Sensor-enabled eco [PDU](#) also offers comprehensive power analysis reports which can separate by departments and locations, providing precise measurements of current, voltage, power and watt-hour in a real-time display.

With its advanced security features and ease of operation, the eco [PDU](#) is the most convenient, most reliable, and most cost effective way to remotely manage power access for multiple computer installations and allocate power resources in the most efficient way possible.

Note: Sensors are optional accessories. A sensor-enabled installation is required to generate a more complete energy-efficient data and chart. Higher sensor installation density is helpful to generate more accurate data.

Model	Power Cord (IEC C19 to)	Outlets	Monitoring Level
PE6208A	NEMA 5-20P	NEMA 5-20R	PDU
PE6208B	NEMA 6-20P	IEC C13 / C19	PDU
PE6208G	IEC C20	IEC C13 / C19	PDU

## Features

### • Power Distribution

- Space saving 1U rack mount design with rear mounting
- IEC or NEMA outlet models
- 3 digit 7-segment front panel LED shows Current / IP Address
- Remote users can monitor outlet status via web pages on their browsers
- [Safe shutdown support](#)
- Separate power for the unit's own power and its power outlets. The user interface is still accessible even when an overload condition trips the devices' circuit breaker

### • Remote Access

- Remote power control via TCP/IP and a built in 10/100 Ethernet port
- Network Interfaces: TCP/IP, UDP, HTTP, HTTPS, SSL, SMTP, DHCP, NTP, DNS, 10Base-T/100Base-TX, auto sense, Ping, Telnet
- eco [PDU](#) Power Management software – [eco DC](#)
- Supports SNMP Manager V3

### • Operation

- Remote power outlet control (On, Off, Power Cycle) by individual outlets
- Power-on sequencing – users can set the power on sequence and delay time for each port to allow equipment to be turned on in the proper order
- Easy setup and operation via a browser-based user interface
- Multibrowser support (IE, Firefox, Chrome, Safari)
- RTC support to keep the timer running during times of no power.
- Supports up to 8 user and 1 administrator accounts
- Proactive Overload Protection (POP) – automatically powers off outlets in the user-defined sequence when a current overload occurs in protecting the powered devices

### • Management

- Power status measurement at the [PDU](#) level
- LED indicators for current and IP address at the [PDU](#) device level
- [Real-time current, voltage, and kWh displayed in a browsed-based UI for monitoring at the \[PDU\]\(#\) level](#)
- Current and voltage threshold setting
- Naming support for outlets
- User outlet access assignment on an outlet-by-outlet basis.
- Event logging and syslog support
- Upgradeable firmware
- Multilanguage support: English, German, Traditional Chinese, Simplified Chinese, Japanese, French, Spanish, Italian

### • Security

- Two-level password security
- Strong security features include password protection and advanced encryption technologies – 128 bit SSL
- Remote authentication support: RADIUS

### • [eco DC](#) Energy Management Software

- Automatic discovery of all PE devices within the same intranet
- Remote real-time power measurement and monitoring
- Remote real-time power outlet management\*
- Remote real-time environment sensor monitoring
- Plotting/Monitoring of all PE devices
- Exceed threshold alert through SMTP and Syslog
- Power Analysis Report


### • Features available only on firmware-upgraded models with -ATB part number

- Supports SMPTS, IPv6, Modbus (Over TCP/IP), Auto Ping, TLS1.2, SSH
- Supports IEEE 802.1X
- Authentication: LDAP, TACACS+
- UI – heartbeat, schedule control, mail control, and setting rule

## Specifications

Function	PE6208A	PE6208B	PE6208G
Electrical			
Nominal Input Voltage	100 – 120 VAC	100 – 240 VAC	100 – 240 VAC
Maximum Input Current	20A Max; 16A(UL de-rated)	20A Max; 16A(UL de-rated)	16A Max
Input Frequency	50-60 Hz	50-60 Hz	50-60 Hz
Input Connection	PE6208A-ATA-A : NEMA 5 -20P PE6208A-ATA-J : NEMA L5-20P	PE6208B-ATA-B : NEMA 6 -20P PE6208B-ATA-J : NEMA L6 -20P	IEC 60320 C20
Input Power	2400 VA(Max); 1920 VA(UL de-rated)	4160 VA(Max); 3328 VA(UL de-rated)	3680 VA(Max)
Outlet Type	Total : 8 x NEMA 5-20R	Total : 7 x IEC320 C13 + 1 x IEC320 C19	Total : 7 x IEC320 C13 + 1 x IEC320 C19
Nominal Output Voltage	100 – 120 VAC	100 – 240 VAC	100 – 240 VAC
Maximum Output Current (Outlet)	NEMA 5-20R: 20A(Max); 16A(UL de-rated)	C13: 15A(Max); 12A(UL de-rated) C19: 20A(Max); 16A(UL de-rated)	C13: 10A(Max) C19: 16A(Max)
Maximum Output Current (Bank)	20A(Max); 16A(UL de-rated)	20A(Max); 16A(UL de-rated)	16A(Max)
Maximum Output Current (Total)	20A(Max); 16A(UL de-rated)	20A(Max); 16A(UL de-rated)	16A(Max)
Breakers	1 x 20A Non-Fuse Breaker	1 x 20A Non-Fuse Breaker	1 x 16A Non-Fuse Breaker
Metering	Bank level Current, Voltage, VA , PF and KWh Monitoring	Bank level Current, Voltage, VA , PF and KWh Monitoring	Bank level Current, Voltage, VA , PF and KWh Monitoring
Outlet Switching	Yes	Yes	Yes
Environment Sensor Ports	2	2	2
Metering Accuracy	Voltage Range: 100VAC ~ 250VAC +/-1% Power Range: 100W ~ Maximum Capacity +/- 2% Current Range: 0.1A~1A +/- 0.1A, 1A~20A +/- 1%	Voltage Range: 100VAC ~ 250VAC +/-1% Power Range: 100W ~ Maximum Capacity +/- 2% Current Range: 0.1A~1A +/- 0.1A, 1A~20A +/- 1%	Voltage Range: 100VAC ~ 250VAC +/-1% Power Range: 100W ~ Maximum Capacity +/- 2% Current Range: 0.1A~1A +/- 0.1A, 1A~20A +/- 1%
Physical Properties			
Dimensions (L x W x H)	43.24 x 22.04 x 4.40 cm (17.02 x 8.68 x 1.73 in.)	43.24 x 22.04 x 4.40 cm (17.02 x 8.68 x 1.73 in.)	43.24 x 22.04 x 4.40 cm (17.02 x 8.68 x 1.73 in.)
Weight	2.79 kg ( 6.15 lb )	2.79 kg ( 6.15 lb )	2.79 kg ( 6.15 lb )
Power Cord Length	3 m	3 m	3 m
Environmental			
Temperature (Operating / Storage)	0 – 50°C / -20 – 60°C	0 – 50°C / -20 – 60°C	0 – 50°C / -20 – 60°C
Humidity (Operating & Storage)	0 – 80% RH, Non-Condensing	0 – 80% RH, Non-Condensing	0 – 80% RH, Non-Condensing
Compliance			
EMC Verification	FCC, Others by Request	FCC, Others by Request	CE, Others by Request
Safety Verification	UL, Others by Request	UL, Others by Request	CE-LVD, Others by Request
Note	For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format.		

Diagram

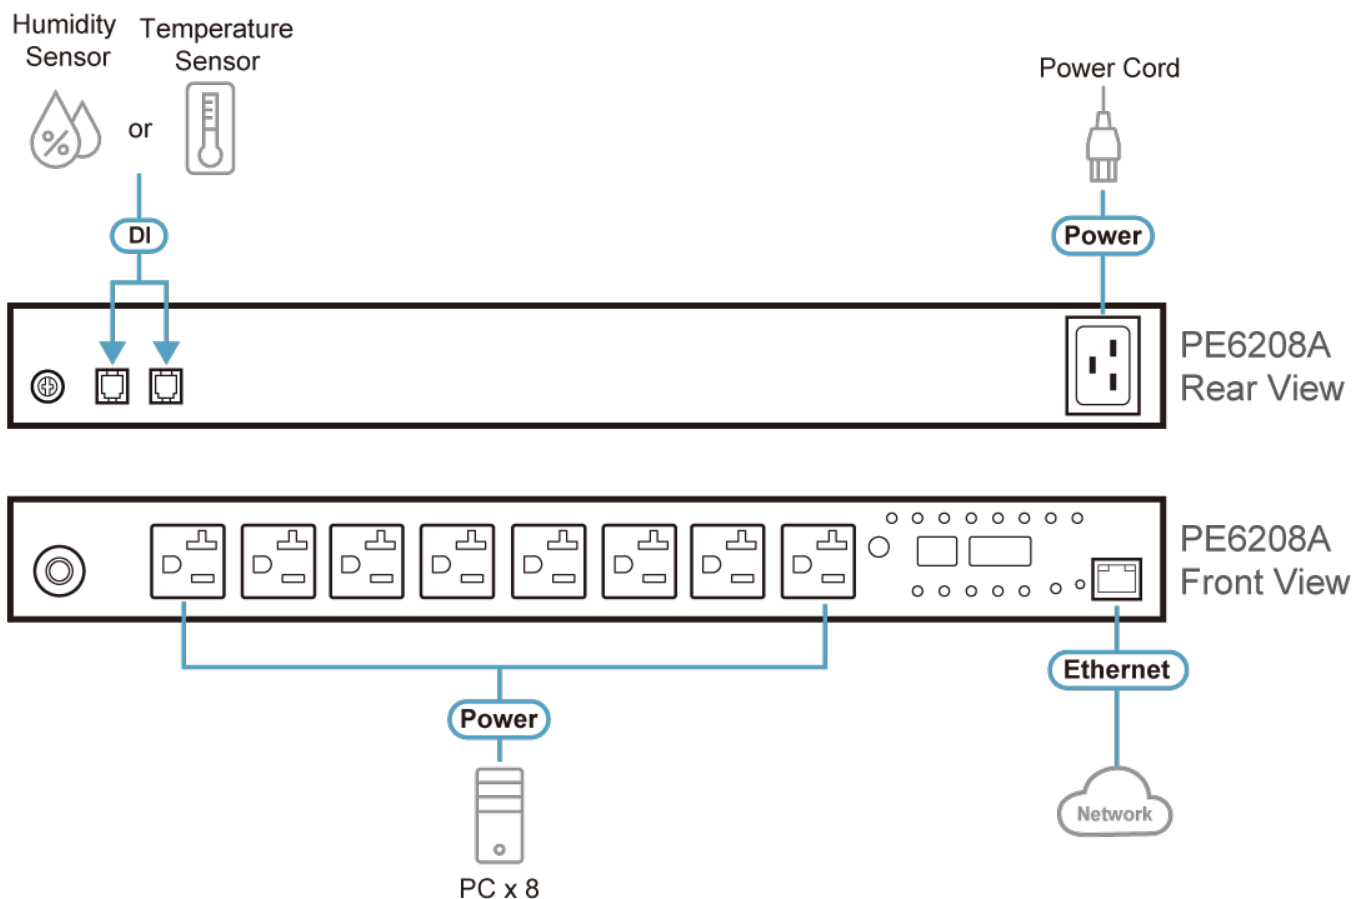

**ATEN International Co., Ltd.**

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan  
 Phone: 886-2-8692-6789 Fax: 886-2-8692-6767  
 www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.  
 ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.  
 All rights reserved. All other trademarks are the property of their respective owners.