

# VS0204

2x4 VGA/Audio Matrix Switch



The VS0204 Video Matrix Switch allows video and audio from 2 computers to be routed to 4 monitors, projectors and speakers. Ideal for presentations and applications where information from multiple computers is being delivered to multiple destinations.

#### **Features**

- Each of the 4 video outs can toggle between Source 1 and Source 2 using front panel pushbuttons
- Audio enabled
- $\bullet\,$  Duplicate and enhance video signals to up to 30 m (max.)  $^{\star}$
- Expandable: Cascade to ATEN's video splitters to support hundreds of video displays
- With up to 200 MHz Video Bandwidth
- OS Support: Windows 2000, Windows XP, Linux, Mac and Sun
  - \* Video content sent over very long distance using a VGA cable might result in slight degradation of the video signal and quality




### **Specifications**

Video Input	
Interfaces	2 x HDB-15 Male (Blue)
Impedance	75 Ω
Video Output	
Interfaces	4 x HDB-15 Female (Blue)
Impedance	75 Ω
Video	
Max. Bandwidth	200 MHz
Max. Resolution	Up to 1920 x 1200
Max. Distance	Up to 30 m
Audio	
Input	2 x Mini Stereo Jack Female (Green)
Output	4 x Mini Stereo Jack Female (Green)
Power	Connector: 1 x DC Jack Consumption: 5.3 VDC, 3.02W
Environmental	
Operating Temperature	0-50°C
Storage Temperature	-20 - 60°C
Humidity	0 - 80% RH, Non-Condensing
Physical Properties	
Housing	Metal
Weight	0.69 kg ( 1.52 lb )
Dimensions (L x W x H)	20.00 x 7.61 x 4.40 cm (7.87 x 3 x 1.73 in.)
Carton Lot	20 pcs
Note	For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format.



#### Diagram

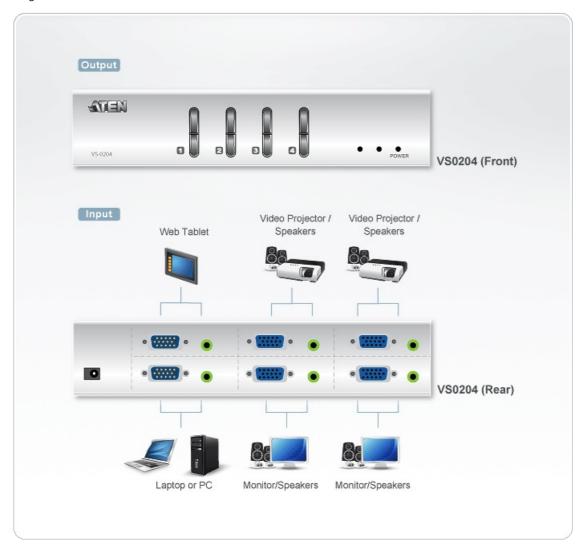

## ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan Phone: 886-2-8692-6789 Fax: 886-2-8692-6767

www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.
ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.
All rights reserved. All other trademarks are the property of their respective owners.