

VS231

2-Port HDTV A/V Switch



The 2 port VS231 makes plugging and unplugging devices a thing of the past. This high quality component video (YPbPr) switcher with on-board stereo audio is perfect for HDTV enthusiasts who want to add more inputs to their high-definition display. Use VS231 to effortlessly connect a DVD player and set-top box or satellite receiver to your HDTV or projector.

The IR remote is an added convenience, allowing you to enjoy multimedia switching from the comfort of your seat. The VS231 and HDTV switcher supports high-end digital video devices such as DVD players and recorders, set-top boxes, satellite receivers, and more. It also works well for high-definition editing systems.


특장점

- Displays the video output of two digital devices on a single high definition monitor or projector.
- Stereo audio support.
- Quick and easy switching via front panel pushbuttons or IR remote control.
- Electronic switching for greater reliability and durability.
- Easy installation.
- Complete home theater switching solution.

사양

장치 연결	2
포트 선택	Push Buttons,IR Remote Control
커넥터	
입력	2 x RCA Female (Green) 2 x RCA Female (Blue) 2 x RCA Female (Red) 2 x RCA Female (White)
오디오	2 x RCA Female (Red) 1 x RCA Female (White) 1 x RCA Female (Red)
출력	1 x RCA Female (Green)
비디오	1 x RCA Female (Blue) 1 x RCA Female (Red)
전원	1 x DC Jack (Black)
스위치	
전원	2 x Pushbutton
LED	
온라인	2 (Orange)
선택	2 (Green)
소비 전력	DC 5.3V, 0.8W (Max.) 노트: ● 와트 단위의 측정은 외부 부하가 없는 장치의 일반적인 전력 소비를 나타냅니다. ● BTU/h 단위의 측정값은 장치가 완전히 로드되었을 때 장치의 전력 소비를 나타냅니다.
비디오	1600 x 1200 @ 60Hz; 480p, 720p, 1080i, 1080p
사용 환경	
사용 온도	0-50°C
보관 온도	-20-60°C
습도	0 - 80% RH, Non-Condensing
제품 외관	
재질	Metal
무게	0.65 kg
크기 (L X W X H)	20.00 x 7.66 x 4.40 cm
노트	일부 랙 마운트 제품은,WxDxH의 표준 물리적 치수를 LxWxH 형식으로 사용하고 있습니다.

다이어그램

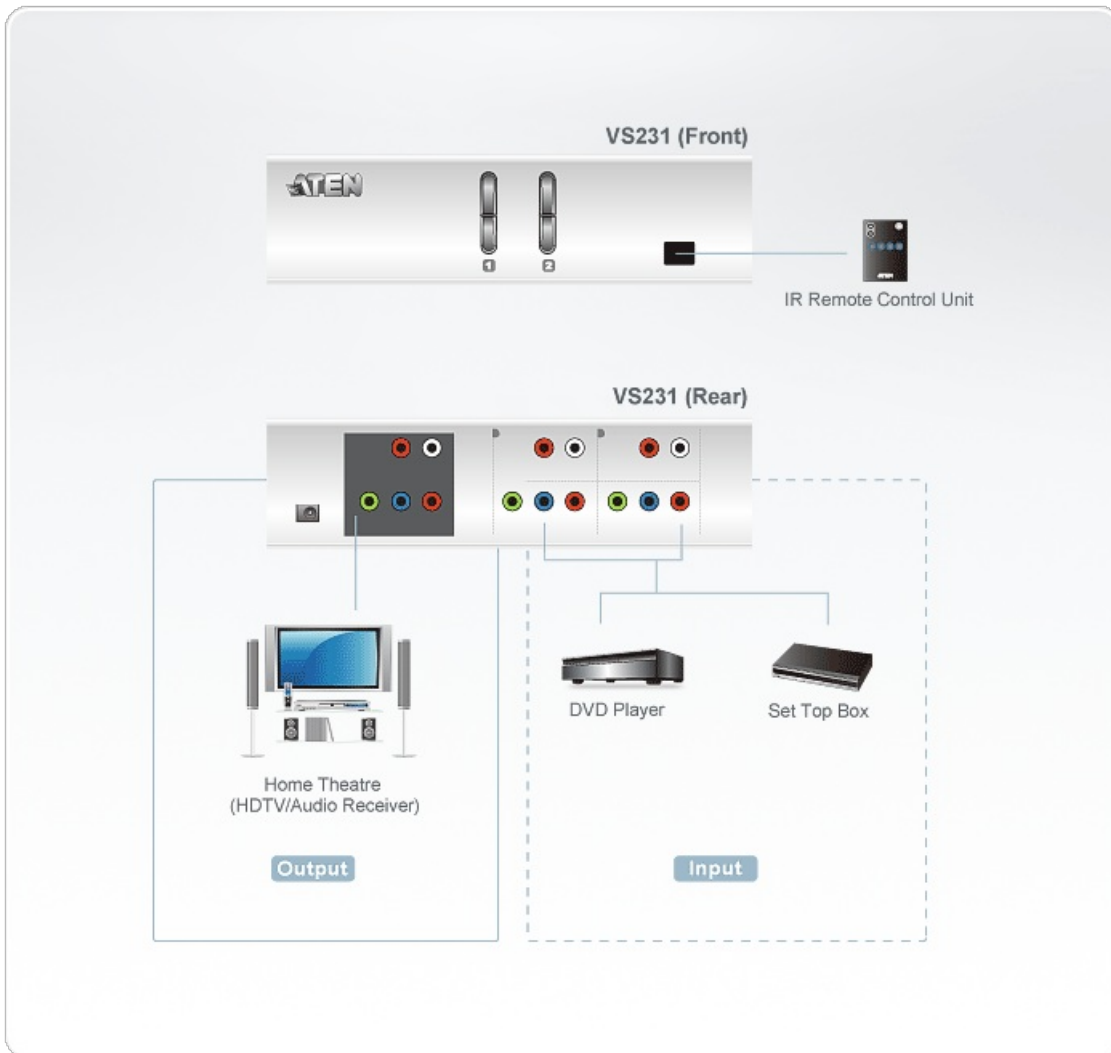

에이텐 코리아 ATEN KOREA

서울시 금천구 디지털로9길 32(가산동) 갑을그레이트밸리 B동 303호

Tel: 02-467-6789

Fax: 02-467-9876

www.aten.com/kr/ko E-mail: marketing@aten.co.kr



© Copyright 2025 ATEN® International Co., Ltd.
 ATEN and the ATEN logo are registered trademarks of ATEN International Co., Ltd.
 All rights reserved. All other trademarks are the property of their respective owners.