

VS1504T

4-Port Cat 5e/6 Audio/ Video Splitter



The <u>VS1504</u> Cat 5 Audio/Video Splitter is a splitter designed to connect one source to 4 displays over a long distance. Incorporating suggested compatible receivers *, the <u>VS1504</u> A/V Over Cat 5 Splitter can be a complete solution ideal for any professional A/V installation that requires multimedia content to be delivered to multiple destinations located up to 500 m away from the source.

* Suggested Compatible Receiver Units:

VB552 VGA Over Cat 5 Repeater + Audio

VE200R Audio/Video Receiver

Cascadable to three levels, the <u>VS1504</u> can support thousands of displays when combined in an installation with ATEN repeaters or extenders. Incorporating RS-232 connectivity so serial devices such as touchscreens can be included in the installation.

The solution is perfect for a wide range of applications:

- In-store or tradeshow digital signage
- · Broadcasting information to public locations
- Sporting events
- Theater and lecture overview rooms
- Classroom and company training facilities

Egenskaper


- One video input to 4 video outputs
- Cascadable to three levels provides up to thousands of video signals when combined in an installation with ATEN receiving devices*
- Audio and serial enabled
- Uses Cat 5e (or higher) cable to extend displays up to 150 m, 450 m when combined with aten receiving devices
- High quality video supports 1920 x 1200 @ 60Hz
- Group screens off/on function
- Provide a RS-232 channel for selection**

*Receiving Devices

- a. ATEN VB552 (VGA Over Cat 5 Repeater)
- b. ATEN VE200R (Audio/Video Extender)
- ** Only one RS-232 channel can be selected at a time



Diagram

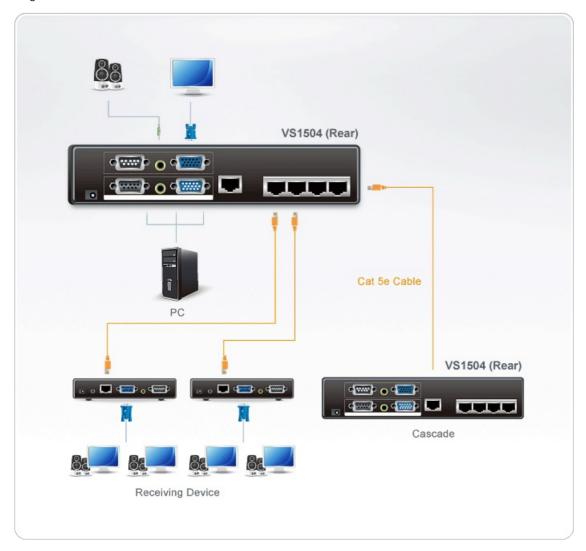

ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan Phone: 886-2-8692-6789 Fax: 886-2-8692-6767

www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.
ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.
All rights reserved. All other trademarks are the property of their respective owners.