

## CS62A

2-Port PS/2 VGA/Audio Cable KVM Switch (1.2m)



CS62A 2-Port KVM Switch has a handy design integrating with 4 feet of cables. It can control 2 servers via a single console.


### Features

- One PS/2 console controls 2 computers
- Compact design, built in 1.2m cables
- All-in-one design
- With speaker support
- Superior video quality- up to 2048 x 1536; DDC2B
- Auto Scan function to monitor computer operation
- Bus-Powered
- OS Compatibility includes Windows 2000/XP/[Vista](#), LINUX and FreeBSD

## Specification

Computer Connections	2
Port Selection	Hotkey
Connectors	
Console Ports	1 x HDB-15 Female (Blue) 1 x 6-pin Mini-DIN Female (Purple) 1 x 6-pin Mini-DIN Female (Green) 1 x 3.5mm Audio Jack Female (Green)
KVM Ports	2 x HDB-15 Male (Blue) 2 x 6-pin Mini-DIN Male (Purple) 2 x 6-pin Mini-DIN Male (Green) 2 x 3.5mm Audio Jack Male (Green)
LEDs	
Selected	2 x Green
Cable Length	
Computer	2 x 1.2 m
Emulation	
Keyboard / Mouse	PS/2
Video	2048 x 1536; DDC2B
Scan Interval	3, 5, 10, 20 seconds (default: 5 secs)
Power Consumption	DC5V:0.22W:5BTU
Environmental	
Operating Temperature	0-50°C
Storage Temperature	-20-60°C
Humidity	0~80% RH, Non-condensing
Physical Properties	
Housing	Plastic
Weight	0.30 kg ( 0.66 lb )
Dimensions (L x W x H)	8.40 x 5.40 x 3.00 cm (3.31 x 2.13 x 1.18 in.)
Note	For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format.

## Diagram

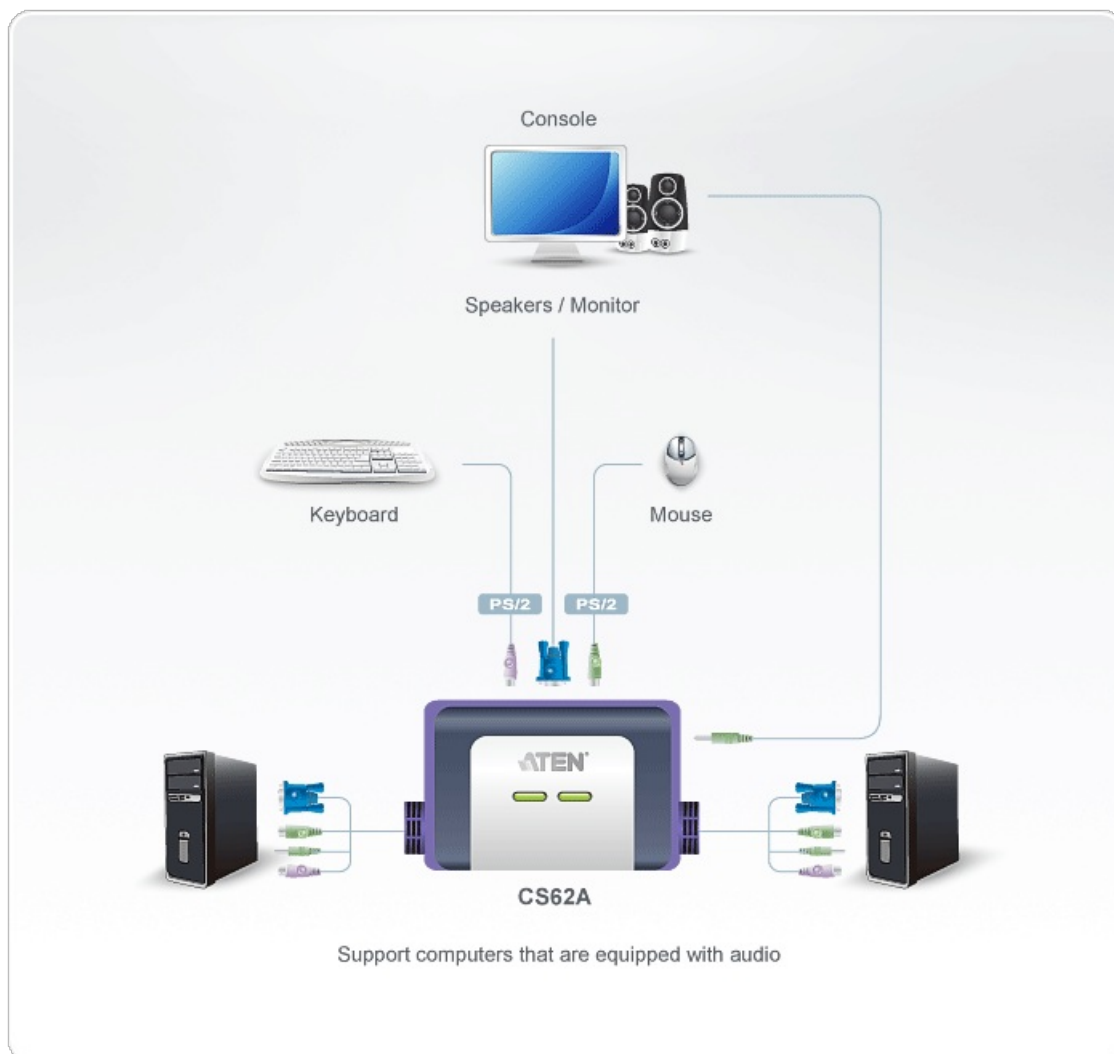

### **ATEN International Co., Ltd.**

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan

Phone: 886-2-8692-6789 Fax: 886-2-8692-6767

www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.  
 ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.  
 All rights reserved. All other trademarks are the property of their  
 respective owners.