

VK248

8-Channel Relay Expansion Box



The VK248 provides Ethernet-to-relay channel connectivity with 8 channels of relay output. It allows users to remotely access relay devices from a PC or any system located anywhere. The complete Telnet CLI commands are fully integrated into users' commercial and industrial applications.

What's more, the VK248 serves as a flexible expansion box of the ATEN Control System, enabling users to control additional equipment, such as screens, projector lifts and blinds, through an ATEN controller in any environments where more devices are required. With the advantage of Ethernet-based connection, the expansion box can be easily connected to controllers via LAN connection from a variety of locations across a network.

Accessories:

*The power adapter for this product is sold separately. For more information about this accessory, see [Accessories](#).


Features

- An Ethernet-to-relay channel box ships with 8 channels of relay output
- Supports Power over Ethernet (PoE) or DC power supply
- WebUI provides VK248 system information, including firmware upgrade
- Supports Telnet CLI (command-line interface) mode for third-party system integration
- An expansion solution for connecting more relay channels to ATEN Control System
- Flexible deployment via Ethernet connection
- Works with a connected ATEN controller with ID Switch through instant configuration

Specification

Interfaces	
Relay	<ul style="list-style-type: none"> • 8 normally open relays (8 x 2-pole terminal block) • Contact Rating: Max 24 VDC, 2A
Ethernet	<ul style="list-style-type: none"> • 1 x RJ-45 Female, 10/100Base-T • Supported Protocol: ARP, ICMP, TCP/IP, DHCP, HTTPS, SSH • DHCP-enabled. The following default IP settings will be used if no IP is assigned within 30 seconds: IP: 192.168.0.60 Subnet Mask: 255.255.255.0
Switches	
Controller ID	1 x 16-segment Switch
Expander ID	1 x 8-segment Switch
Reset Button	1 x Semi-recessed Pushbutton
USB	1 x USB Type A (Firmware upgrade only)
Power Consumption	DC5V:2.82W:24BTU DC48V:3.53W:27BTU
Environmental	
Operating Temperature	0 – 50°C
Storage Temperature	-20 – 60°C
Humidity	0 - 80% RH, Non-Condensing
Power	
Output	12 VDC, 300 mA
Physical Properties	
Housing	Metal
Weight	0.65 kg (1.43 lb)
Dimensions (L x W x H)	20.00 x 7.58 x 4.20 cm (7.87 x 2.98 x 1.65 in.)
Note	For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format.

Diagram

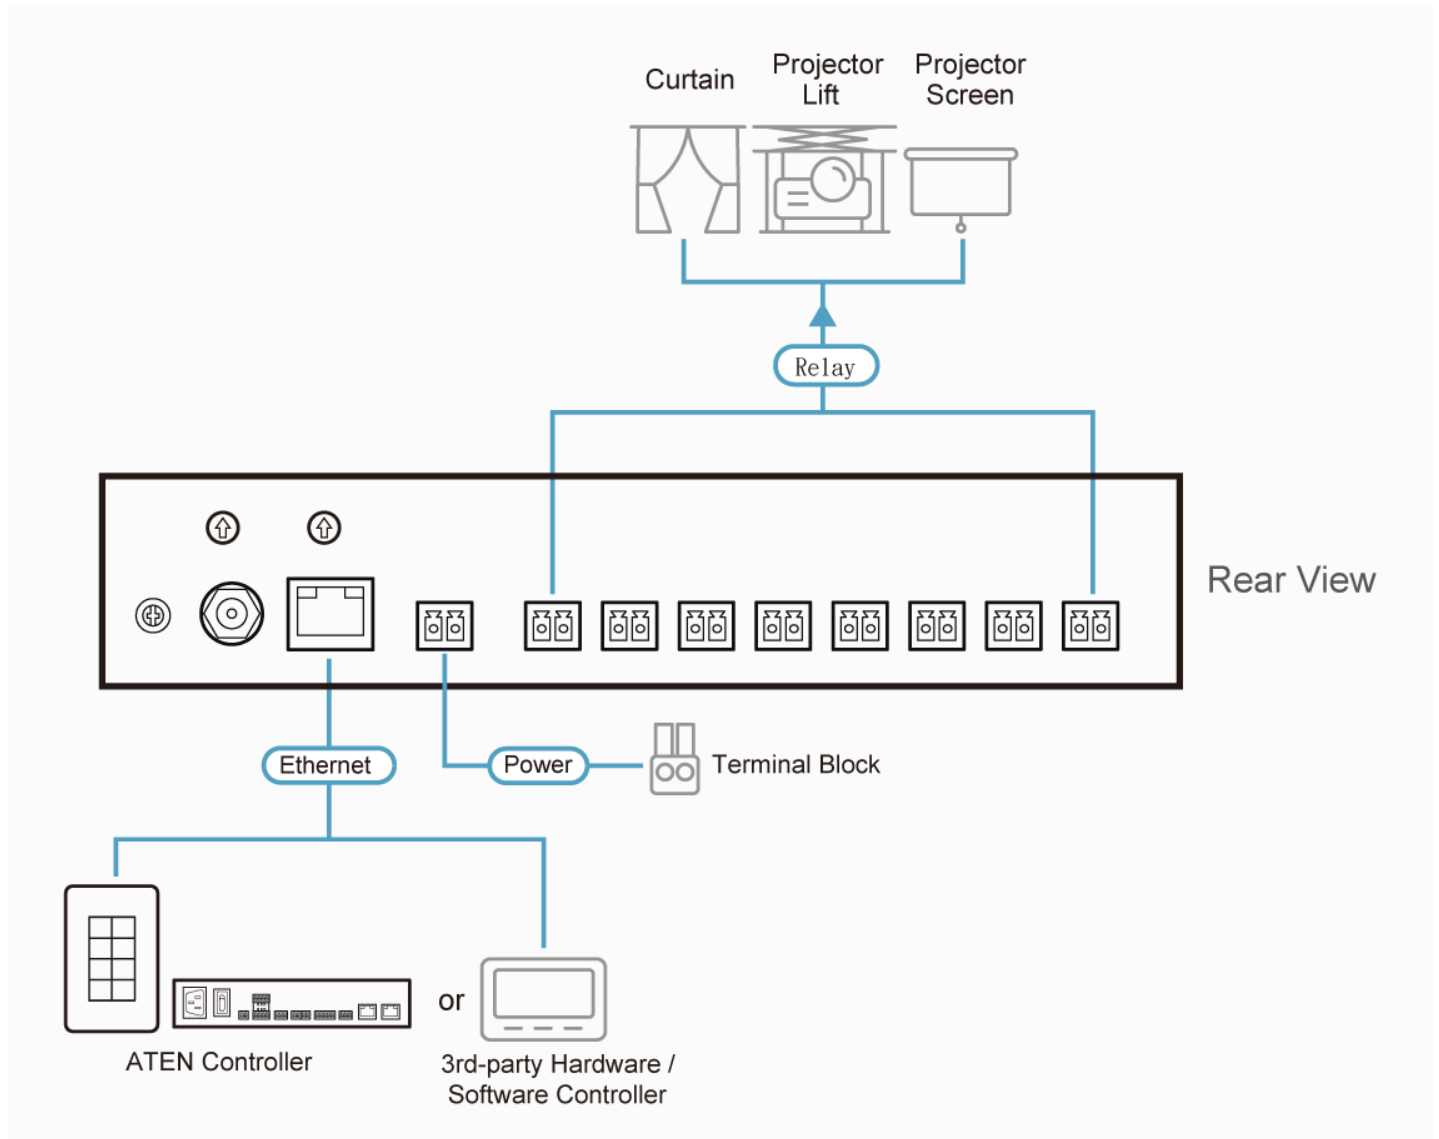

ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan
 Phone: 886-2-8692-6789 Fax: 886-2-8692-6767
 www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.
 ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.
 All rights reserved. All other trademarks are the property of their respective owners.