

## CS692

2-Port USB HDMI/Audio Cable KVM Switch with Remote Port Selector



The CS692 2-Port USB HDMI/Audio Cable KVM Switch links two HDMI-enabled PCs or devices to a single USB keyboard, USB mouse, and HD display console. The CS692 Switch takes a giant step forward from prior cable KVM models in the Petite series, by offering full HDMI functionality, USB 2.0 peripheral sharing (via a USB hub attached to the USB mouse port), and a firmware upgrade function that allows you to keep up with latest available versions.

Featuring an unbeatable combination of HDMI functionality, USB 2.0 peripheral sharing convenience, gaming keyboard support, and enhanced user-friendly operations, the CS692 allows users to keep up with the latest innovations in desktop multimedia applications.



### Features

- One KVM console controls two USB HDMI computers
- HDMI compatible: [HDCP](#) compatible
- [Computer selection via remote port selector, hotkeys, and USB mouse](#)
- Audio-enabled - full bass response provides a rich experience for 2.1 channel surround sound systems
- [Independent switching of the KVM and Audio focus - one computer has the KVM focus and the other the Audio focus\\*](#)
- Multiplatform support - Windows, Mac, Linux
- Compact design, built-in all-in-one cables (2 x 1.2 m)
- Superior video quality - up to 1920 x 1200; 1080p
- Compatible with widescreen LCD monitors
- [Video DynaSync™](#) - exclusive ATEN technology eliminates boot-up display problems and optimizes resolution when switching between ports
- [Power on detection](#) - if one computers is powered off, the CS692 will automatically switch to the other computer
- [Supports gaming and multimedia keyboards](#)
- Supports multifunction and wireless keyboards and mice
- Console mouse port emulation/bypass feature supports most mouse drivers and multifunction mice
- Mac keyboard support and emulation\*\*
- [USB 2.0 mouse port can be used for USB hub and USB peripheral sharing\\*\\*\\*](#)
- [Bus-Powered](#)
- [Firmware upgradable](#)

Note: \* HD audio through the HD monitor's built-in speakers cannot be switched independently.

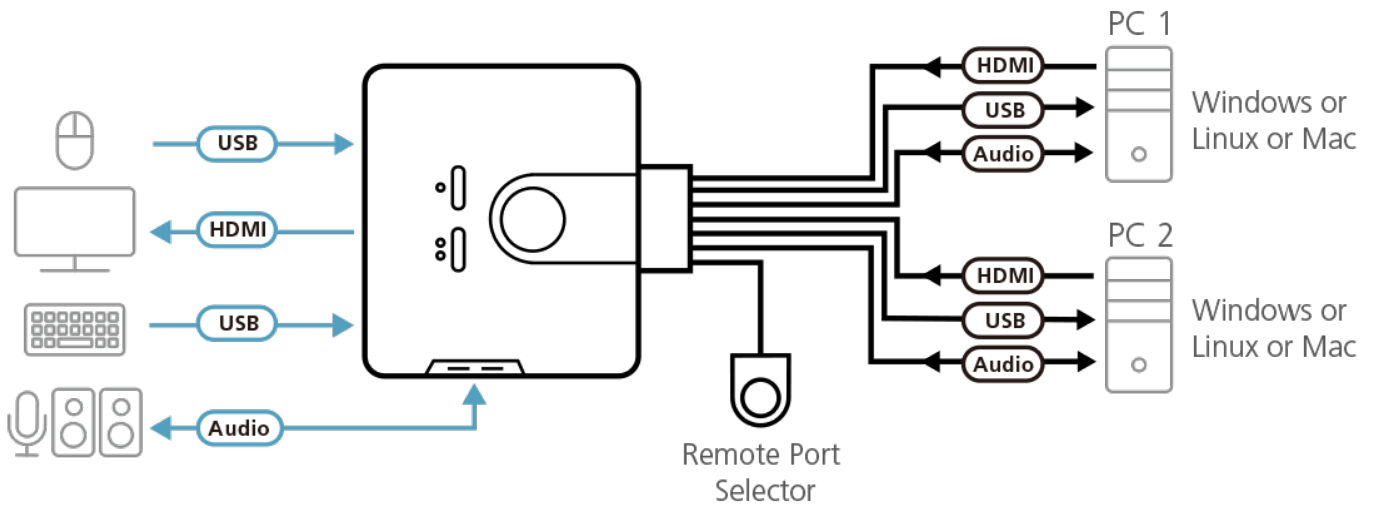
\*\* PC keyboard combinations emulate Mac keyboards. Mac keyboards work only with their own computers.

\*\*\* May require an additional power adapter. To use the USB 2.0 mouse port as a USB hub, you must first disable mouse emulation mode.

## Specifications

Computer Connections	2
Port Selection	Hotkey, Remote Port Selector, Mouse
Connectors	
Console Ports	1 x HDMI Female (Black) 2 x USB Type A Female 1 x 3.5mm Audio Jack Female (Green) 1 x 3.5mm Audio Jack Female (Pink)
KVM Ports	2 x HDMI Male (Black) 2 x USB Type A Male (Purple) 2 x USB Type A Male (Black) 2 x 3.5mm Audio Jack Male (Green) 2 x 3.5mm Audio Jack Male (Pink)
LEDs	
KVM	2 (Green)
Cable Length	
KVM	2 x 1.2 m
Remote Port Selector	1.8 m
Emulation	
Keyboard / Mouse	USB
Video	1920 x 1080 @ 60 Hz; 1920 x 1200 @ 60Hz
Scan Interval	3, 5, 10, 20 secs. (default 5 secs.)
Power Consumption	DC5V:0.72W:8BTUBTU
Environmental	
Operating Temperature	0 - 50°C
Storage Temperature	-20 - 60°C
Humidity	0-80% RH, Non-condensing
Physical Properties	
Housing	Plastic
Weight	0.48 kg ( 1.06 lb )
Dimensions (L x W x H)	8.24 x 6.65 x 2.52 cm (3.24 x 2.62 x 0.99 in.)
Note	For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format.

Diagram


**ATEN International Co., Ltd.**

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan  
 Phone: 886-2-8692-6789 Fax: 886-2-8692-6767  
 www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.  
 ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.  
 All rights reserved. All other trademarks are the property of their  
 respective owners.