

## KA7920

PS/2 VGA KVM Adapter Cable



[The most cost effective choice for installations with less than 4.5m between server and switch!](#)

The KA7920 PS/2 KVM Adapter Cable connects the KVM switch to the video, PS/2 mouse and PS/2 keyboard ports of the target computer. With its small form factor and light weight design, it fits perfectly into most of the rack-mount or desktop servers.


### Features

- Keyboard and mouse emulation - keeps your server functioning smoothly when it is disconnected from the switch's KVM port or relocated to different KVM port
- Lifetime firmware upgrades
- Built in 4.5m Cat 5 cable
- Superior video quality - supports resolution of up to 1600 x 1200 within the distance of up to 4.5m
- Hot pluggable - add or remove computers without having to power down the switch.
- Compact size

## Specifications

Connectors	
Link	1 x RJ-45 Male with 4.5m Cat 5 cable
Computer	2 x 6-pin Mini-DIN Male 1 x HDB-15 Male
LEDs	
Online	1 (Orange)
Environmental	
Operating Temperature	0-50°C
Storage Temperature	-20-60°C
Physical Properties	
Housing	Plastic
Weight	0.25 kg ( 0.55 lb )
Dimensions (L x W x H)	7.93 x 3.70 x 1.55 cm (3.12 x 1.46 x 0.61 in.)
Note	For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format.

## Diagram

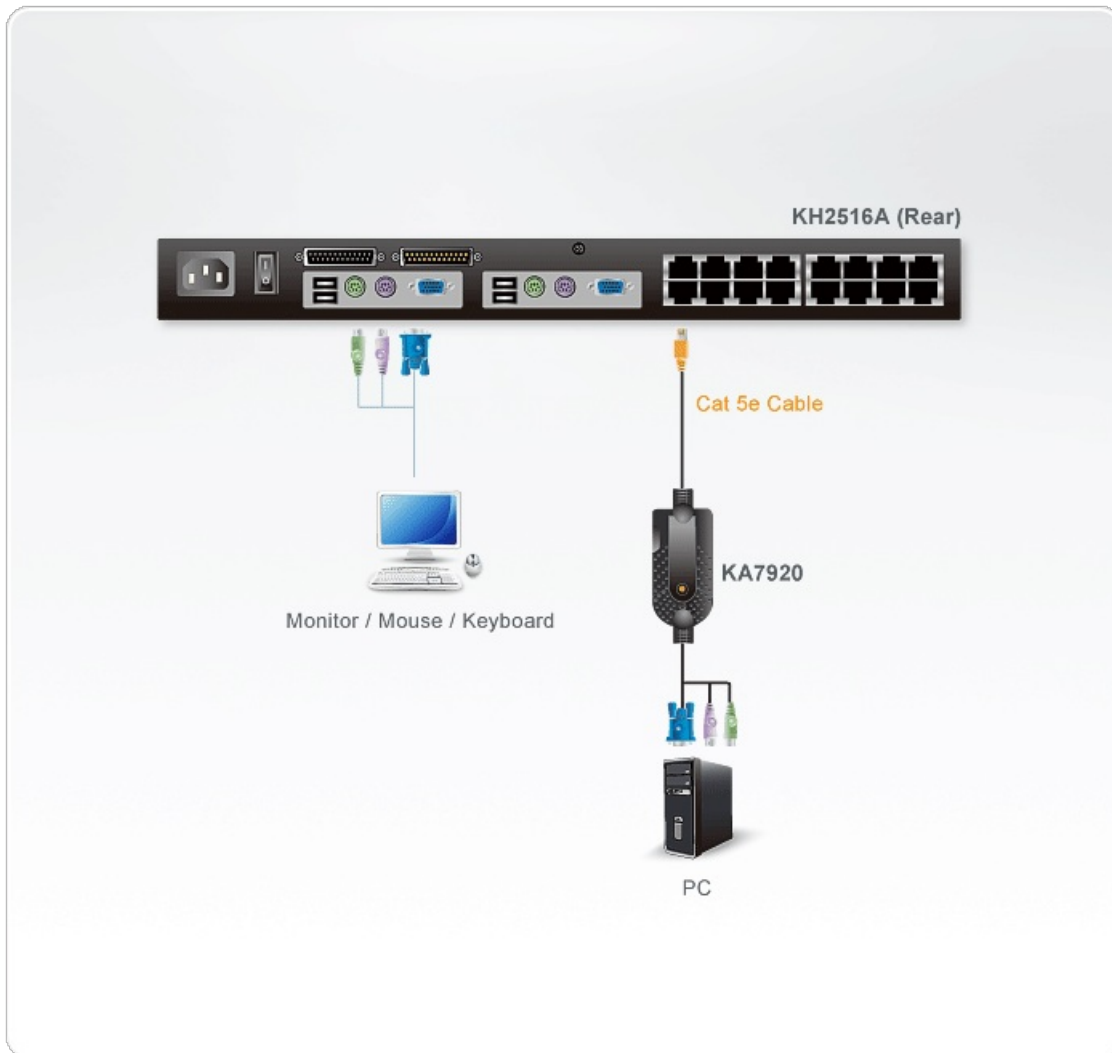

### **ATEN International Co., Ltd.**

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan  
 Phone: 886-2-8692-6789 Fax: 886-2-8692-6767  
 www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.  
 ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.  
 All rights reserved. All other trademarks are the property of their  
 respective owners.