

VC925

DisplayPort to VGA Adapter





DisplayPort Input DisplayPort 1.2a compliant VGA Output





Plug-n-Play

No installation software or drivers required. The VC925 is the perfect solution for connecting DisplayPort inputs to VGA output displays.

Superior Video Resolution

Supports VGA, SVGA, XGA, SXGA, UXGA, and resolutions up to 1920 x 1200 and 1080p, making it highly compatible across devices.






Contact Us

Get a quote for this product or get in touch with our sales experts

Get Quote



Contact Sales

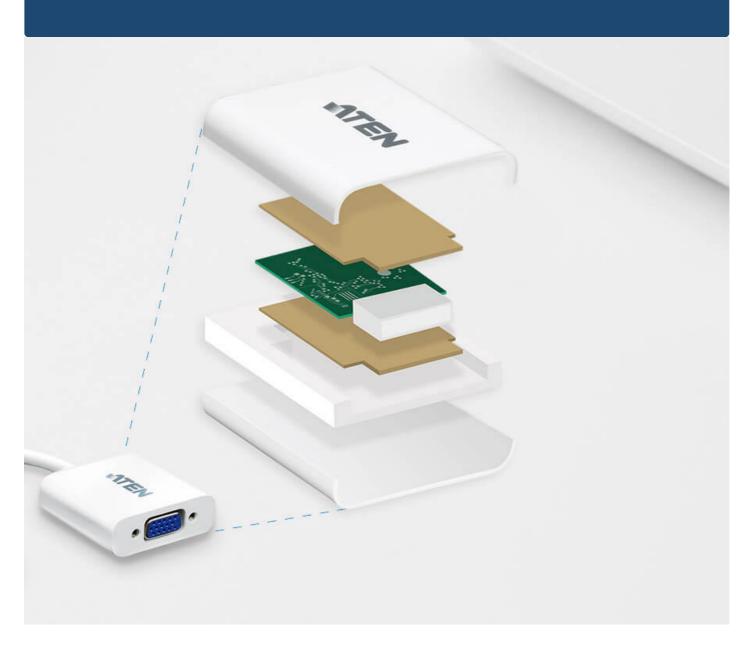

Superior Signal Quality

The internal copper foil shielding protection ensures signal integrity and minimizes external interference, giving you extra reliable and superior quality signals.



I aik to Our Experts

If you prefer to have ATEN contact you, please complete the form and a representative will be in touch with you shortly

| First Name * | | |
|-------------------|----------|--|
| | | |
| Last Name * | | |
| | | |
| Country * | • | |
| - Country * | • | |
| | | |
| Company * | | |
| | | |
| Email * | | |
| | | |
| Phone Number | | |
| | | |
| | | |
| - Customer Type * | _ | |
| | | |
| Job Title * | | |
| | | |
| - | | |





Features

The VC925 is a DisplayPort to VGA adapter, allowing you to connect your device's DisplayPort output to the VGA input of a TV or other display.

The VC925 provide a cost-effective yet high performance signal conversion solution. This adapter is therefore perfect for computers and notebooks, supporting display resolutions of up to WUXGA (1920x1200@60Hz).


- Converts DisplayPort signals to VGA output
- DisplayPort 1.2 compliant
- Supports VGA, SVGA, XGA, SXGA, UXGA and resolutions up to 1920x1200 (PC) / 1080p (HDTV)
- No software or driver installation required

Specifications

| Video Input | | |
|---------------------------|---|--|
| Interfaces | 1 x DisplayPort Male (White) | |
| Video Output | | |
| Interfaces | 1 x HDB-15 Female (Blue) | |
| Video | | |
| Max. Pixel Clock | 165 MHz | |
| Max. Resolution | Input up to 4096 x 2160@60Hz (4:4:4) Output up to 1920 x 1200 | |
| Compliance | DP1.2 | |
| Environmental | | |
| Operating Temperature | 0 - 50 °C | |
| Storage Temperature | -20 - 60 °C | |
| Humidity | 0 - 80% RH, Non-Condensing | |
| Physical Properties | | |
| Housing | Plastic | |
| Weight | 0.04 kg(0.1 lb) | |
| Dimensions (L x W x H) | 18.00 x 4.50 x 1.50 cm (7.09 x 1.77 x 0.59 in.) | |
| Carton Lot | 40 pcs | |
| Note | For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format. | |



Diagram

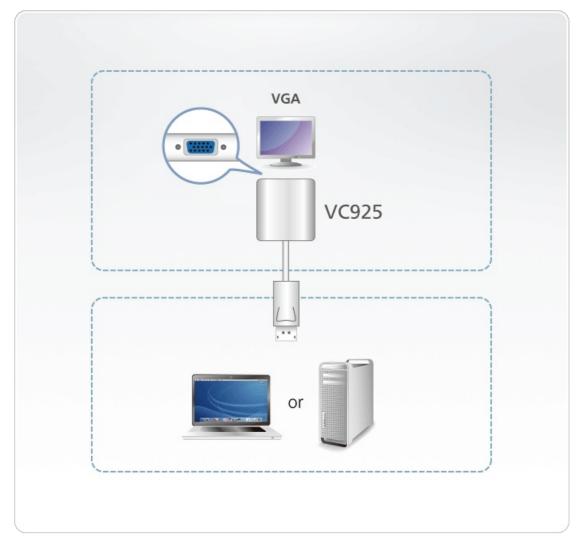

ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan Phone: 886-2-8692-6789 Fax: 886-2-8692-6767 www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd. ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd. All rights reserved. All other trademarks are the property of their respective owners.