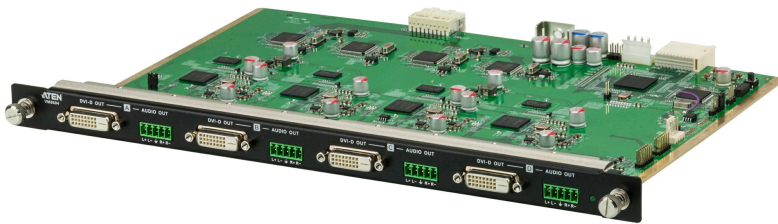

VM8604

4-Port DVI Output Board with Scaler



The VM8604 4-Port DVI Output Board offers an easy way to route any of 4 audio/video sources to any of 4 displays, when used in combination with ATEN's [Modular Matrix Switch](#).

The VM8604 supports [Seamless Switch](#)™ technology that provides video switching in realtime, a built in scaler that handles different video resolutions, and [EDID](#) Expert technology for smooth switching between displays, giving you the perfect viewing experience.

Features

- 4-port DVI Output Board that is compatible with the [VM1600/VM3200](#) and can be mixed with modular I/O boards of any type for optimum flexibility
- Superior video quality – up to 1920 x 1200 @ 60Hz
- HDCP 1.4 Compatible
- Seamless Switch™– provides continuous video streams, real-time switching and stable signal transmission
- Built-in scaler on each output port to support the scaling function for different video resolutions
- EDID Expert – selects optimum [EDID](#) settings for smooth power-up and the highest quality display
- Built-in [EDID](#) wizard – provides an easy way to customized [EDID](#) settings
- Hot-swappable design for easy integration of I/O boards
- Audio-enabled

Specifications

Video Output	
Interfaces	4 x DVI-D Female (White)
Impedance	100 Ω
Video	
Max. Data Rate	6.75 Gpbs (2.25 Gbps Per Lane)
Max. Pixel Clock	225 MHz
Compliance	HDCP 1.4 Compatible
Max. Resolution	Up to 1920 x 1200
Max. Distance	5 m
Audio	
Output	4 x Captive Screw Connector, 5 Pole *Audio signal type: stereo, balanced / unbalanced.
Power Consumption	20.1W:94BTU
Environmental	
Operating Temperature	0 - 40°C
Storage Temperature	-20 - 60°C
Humidity	0 - 80% RH, Non-Condensing
Physical Properties	
Housing	Metal
Weight	0.55 kg (1.21 lb)
Dimensions (L x W x H)	35.20 x 23.80 x 2.33 cm (13.86 x 9.37 x 0.92 in.)
Carton Lot	2 pcs
Note	For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format.

Diagram

