

VS162

2-Port DVI/Audio Splitter



VS162 Video Splitter provides DVI video and audio input signals to 2 DVI video and audio outputs after duplication and boosting. They are ideal for any type of broadcasting environment, classrooms, or by power computer users.

Features

- Connects computers with DVI graphics to multiple DVI compatible monitors or projectors.
 Fully compliant with DVI-Digital and DVI-Analog.
- Supports DDWG (Digital Display Working Group) standard for DVI compliant monitors. Speaker enabled for audio enjoyment.

 Cascadable to 3 levels provides up to 8 video signals.

- Cascade distance: Source to Device -1.8m, Device to Device-5m, Device to Display-5m.
- Installs in minutes.
 Maintains highest single link video resolution (up to 1920 x 1200).

- DDC, DDC2, DDC2B Compatible (Port 1 only).
 HDCP Compliant.
 OS Support: Windows 2000, Windows XP, Linux, Mac and Sun




Specifications

| Video Input | |
|------------------------|---|
| Interfaces | 1 x DVI-I Female (White) |
| Impedance | 100 Ω |
| Max. Distance | 1.8 m |
| Video Output | |
| Interfaces | 2 x DVI-I Female (White) |
| Impedance | 100 Ω |
| Video | |
| Max. Data Rate | 6.75 Gbps (2.25 Gbps Per Lane) |
| Max. Pixel Clock | 225 MHz |
| Compliance | HDCP Compatible |
| Max. Resolution | Up to 1920 x 1200 |
| Max. Distance | Up to 5 m |
| Audio | |
| Input | 1 x Mini Stereo Jack Female (Green) |
| Output | 2 x Mini Stereo Jack Female (Green) |
| Connectors | |
| Power | 1 x DC Jack |
| Power Consumption | DC5.3V:2.36W:11BTU |
| Environmental | |
| Operating Temperature | 0-50°C |
| Storage Temperature | -20 - 60°C |
| Humidity | 0 - 80% RH, Non-Condensing |
| Physical Properties | |
| Housing | Metal |
| Weight | 0.62 kg (1.37 lb) |
| Dimensions (L x W x H) | 21.00 x 8.80 x 5.55 cm (8.27 x 3.46 x 2.19 in.) |
| Carton Lot | 5 pcs |
| Note | For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format. |
| | |



Diagram

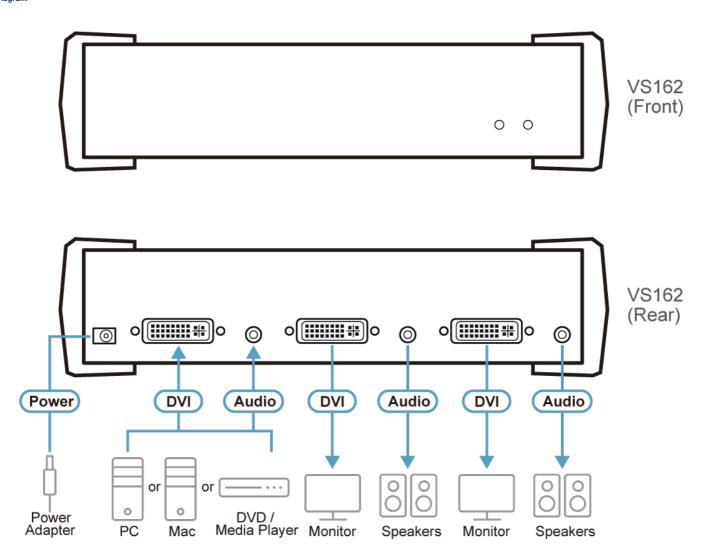

ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan Phone: 886-2-8692-6789 Fax: 886-2-8692-6767

www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.
ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.
All rights reserved. All other trademarks are the property of their respective owners.