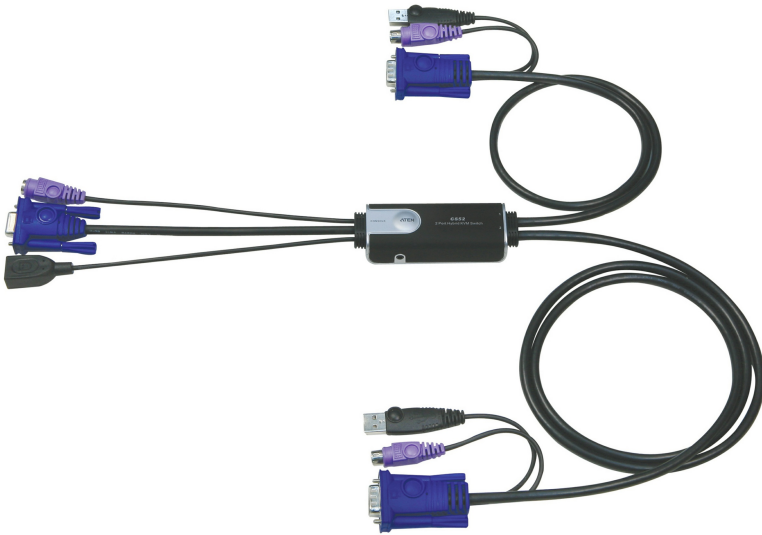

CS52

2-Port PS/2 USB VGA Cable KVM Switch with Remote Port Selector



Flexible Combinations : PS/2 Keyboard+USB Mouse

Features

- One console (monitor, PS/2 keyboard, and USB mouse) controls two computers
- Remote port selection switch for convenient switch placement
- Supports multi-function mice
- [USB 2.0 mouse port can be used for USB hub and USB peripheral sharing](#)
- Compact design, built in all-in-one cables (console 0.15m; computers 0.6m, 1.2m)
- Superior video quality- up to 2048 x 1536; DDC2B
- Auto Scan function to monitor computer operation
- Non-powered
- OS Compatibility includes Windows 2000/XP/ [Vista](#), Linux and FreeBSD.

Specification

Computer Connections	2
Port Selection	Hotkey, Remote Port Selector
Connectors	
Console Ports	1 x HDB-15 Female (Blue) 1 x 6-pin Mini-DIN Female (Purple) 1 x USB Type A Female
KVM Ports	2 x HDB-15 Male (Blue) 2 x 6-pin Mini-DIN Male (Purple) 2 x USB Type A Male (Black)
Remote Port Selector	1 x 2.5mm Audio Jack Female
LEDs	
Selected	2 (Green)
Cable Length	
Console	0.15 m
Computer	1 x 0.6 m; 1 x 1.2 m
Emulation	
Keyboard / Mouse	PS/2
Video	2048 x 1536; DDC2B
Scan Interval	3, 5, 10, 20 seconds (default: 5 secs.)
Power Consumption	DC5V:0.02W:4BTU
Environmental	
Operating Temperature	0-50°C
Storage Temperature	-20-60°C
Humidity	0-80% RH, Non-condensing
Physical Properties	
Housing	Plastic
Weight	0.35 kg (0.77 lb)
Dimensions (L x W x H)	8.45 x 3.40 x 2.21 cm (3.33 x 1.34 x 0.87 in.)
Note	For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format.

Diagram

