

SN0132

32-Port Serial Console Server with Dual Power/LAN



The SN series of serial console servers integrate cutting edge technologies with secure enterprise communications. Available in 32-port models, the serial console server offers both in-band and out-of-band remote serial console access to servers and network devices, via a direct Telnet/SSH client or an applet viewer. SN works in tandem with the Power Over the NET™ remote power management system. Both can be managed with CC2000 management software to provide centralized data center management and integrated power management. With their comprehensive features, SN series of serial console servers help maximize IT productivity, provide scalability and reduce operational costs.

The serial console server is used to connect serial devices to the Ethernet network to meet the needs of demanding applications in industrial control, data acquisition, environment monitoring, and remote facility and equipment management. It offers versatile operation modes including Real COM Port, TCP Server/Client, UDP Server/Client, Serial Tunnel and Virtual Modem. It helps transform the capabilities of legacy serial devices to take advantage of the TCP/IP network to allow remote access, configuration, and management of the serial devices from anywhere in the world over the Internet.

SN series is a complete secure remote access and control solution. Access rights and privilege control can be applied to individual ports. Consolidated authentication simplifies password management. Data encryption is provided. Logging and alerting helps speed resolution of issues and mitigates risk. Enhanced security functions ensure the compliance of internal security mandates. The ease of use, accessibility and manageability of the SN series serial console servers enables a quick response to changing demands and helps meet ultimate business goals.

- [System Compatibility Table](#)
- [Adapter Diagrams](#)



Features

- **System Accessibility and Availability**
- [Secure in-band and out-of-band network access to serial consoles](#)
- In-band access of Ethernet
- Browser access with an intuitive GUI
- Terminal-based access with a menu-driven UI
- Out-of-band access of dial-up modem
- Modem dial-in/dial-back/dial-out
- [Front access USB ports for USB storage or for USB-based PC cards](#)
- [Laptop USB Console \(LUC\) port for extra local console access via laptop computer](#)
- Dual Ethernet ports for failover or for dual IP addresses access

- Dual power supply
- **Serial Console Management**
- [Convenient and simple access via browser or Telnet/SSH client](#)
- Port access via Telnet/SSH client and third-party client such as PuTTY
- Direct port access from Telnet client – bypassing login to SN
- [Convenient port access via the applet serial viewer from SN Web GUI](#)
- Selectable Telnet or SSH for the serial viewer
- Selectable ActiveX or Java for the serial viewer
- Comprehensive viewer function – Copy/paste, logging, data import, Macro, broadcast and Message Board
- Sun Solaris ready – Sun "break-safe"
- Alert String
- Command filter – Administrators can restrict users to execute only predefined commands*
- Data buffering
- Multiple users simultaneously access to the same port – up to 16 connections per port.
- Selectable mode for multiple simultaneous access – Exclusive/Occupy/Share mode
- [Integrated with Power Over the NET product for port and power outlet association](#)
- **Security**
- SSH and SSL (TLS v1.0 / TLS v1.1 / TLS v1.2) support
- Secure login from browser with TLS 1.2 data encryption and RSA 2048-bit certificates
- Configurable user permissions for port access and control
- Configurable group permission for port access and control
- Local and remote authentication and logging
- SN0132 support RADIUS, TACACS+, LDAP/AD, and Kerberos
- IP filtering and MAC filtering
- FIPS 140-2 certified cryptography – provides a FIPS mode to use an embedded FIPS 140-2 certified OpenSSL cryptographic module (Certificate # 1747)
- **System Management**
- System configuration via Web browser of HTTP/HTTPS, Telnet/SSH client and local console
- [System log and event logging](#)
- [Comprehensive logging and event notification](#)
- ATEN Log server and Syslog server
- SNMP agent
- Event notification – SN0132 support notification of SMTP email, SNMP Trap, and SMS (with additional mobile device)
- Backup/restore system configuration
- Firmware upgradeable
- Multi-browser support – Internet Explorer, Chrome, Firefox, Safari, Opera, Mozilla, and Netscape
- Customizable global time zone
- NTP for time server synchronization
- DHCP for dynamic IP address assignment
- IPv6 support
- [Integrated with CC2000 for data center centralized management](#)
- **Serial Device Management**
- Versatile serial operating modes – SN0132 support Real COM, TCP Server, TCP Client, UDP, Serial Tunnel and Virtual Modem
- 128-bit/256-bit SSL encryption (TLS v1.0 / TLS v1.1 / TLS v1.2) for Real COM, TCP Server, TCP Client, Serial Tunnel and Virtual Modem
- Multiple simultaneous connections to the same port – up to 16 connections per port
- Real COM driver for Windows 2000/XP/Vista/7 and Windows Server 2003/2008
- Real TTY driver for Linux
- Fixed TTY driver for UNIX
- **Language**
- Web-based GUI multi-language – available for Japanese, Korean, German, Russian, Simplified Chinese and Traditional Chinese


Specification

Serial Console Server

Connectors	
Serial	32 x RJ-45 Female

LAN Ports	2 x RJ-45 Female
Power	2 x IEC 60320/C14
Local Console	1 x RJ-45 Female
Modem	1 x RJ-45 Female
PON	1 x RJ-45 Female
Laptop USB Console (LUC) Port	1 x Mini USB
USB Port	3 x USB Type A Female
Switches	
Power	2 x Rocker Switch
Reset	1 x Recessed Pushbutton
LEDs	
Serial	32 (Green)
Link	N/A
10/100 Mbps	N/A
10/100/1000 Mbps	2 (Red/Orange/Green)
Power	2 (Blue)
Maximum Input Power Rating	100–240VAC; 50/60Hz; 1.8A
Power Consumption	AC110V:22.5W:137BTU AC220V:29.9W:143BTU
Environmental	
Operating Temperature	0 - 40°C
Storage Temperature	-20 - 60°C
Humidity	0 - 80% RH, Non-condensing
Physical Properties	
Housing	Metal
Weight	4.84 kg (10.66 lb)
Dimensions (L x W x H)	43.72 x 32.77 x 4.40 cm (17.21 x 12.9 x 1.73 in.)
Note	For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format.

Diagram

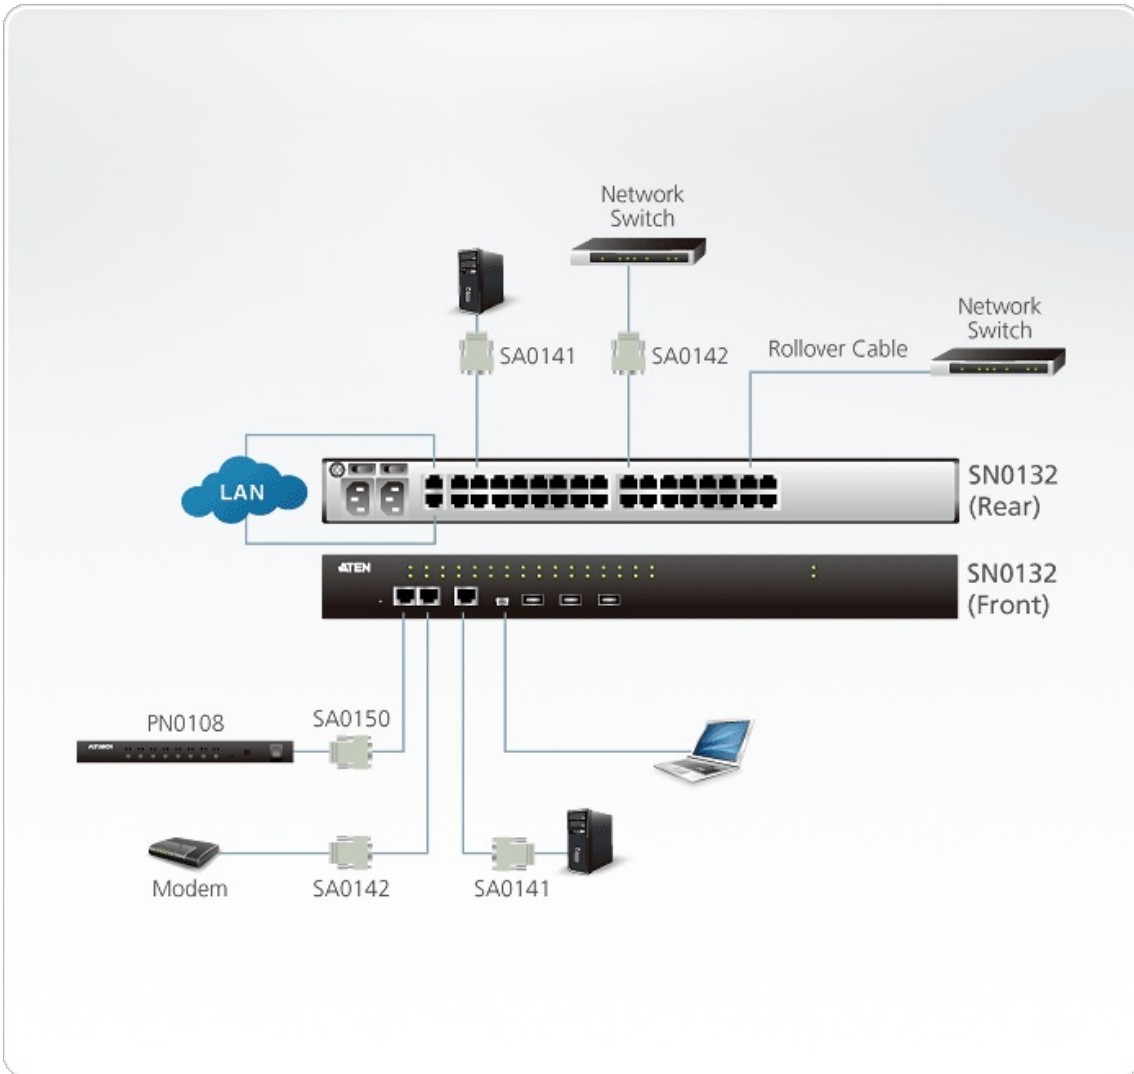

ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan
 Phone: 886-2-8692-6789 Fax: 886-2-8692-6767
 www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.
 ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.
 All rights reserved. All other trademarks are the property of their respective owners.