


---

## VC986

4K DisplayPort to HDMI Active Adapter

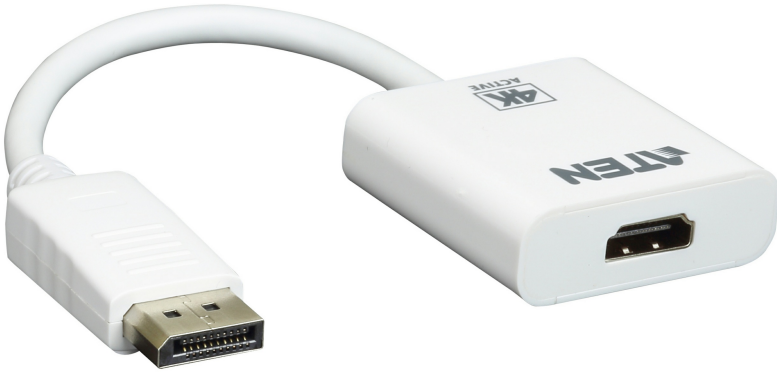

# DisplayPort to HDMI Active Adapter



**4K30**  
Refresh  
Rate

- DisplayPort 1.2a compliant



Built-in chip ensures high quality signal conversion, smooth output, and compatibility with DP++.



**Plug-n-Play**

No installation software or drivers required. The VC986 is the perfect solution for connecting DisplayPort inputs to HDMI output displays. The built-in chip ensures high quality signal conversion, smooth output, and compatibility with DP++.

**Supports 4K**

Supports resolutions up to 4K, making it highly compatible across devices.



4K




## Contact Us

Get a quote for this product or get in touch with our sales experts

[Get Quote](#)

[Contact Sales](#)

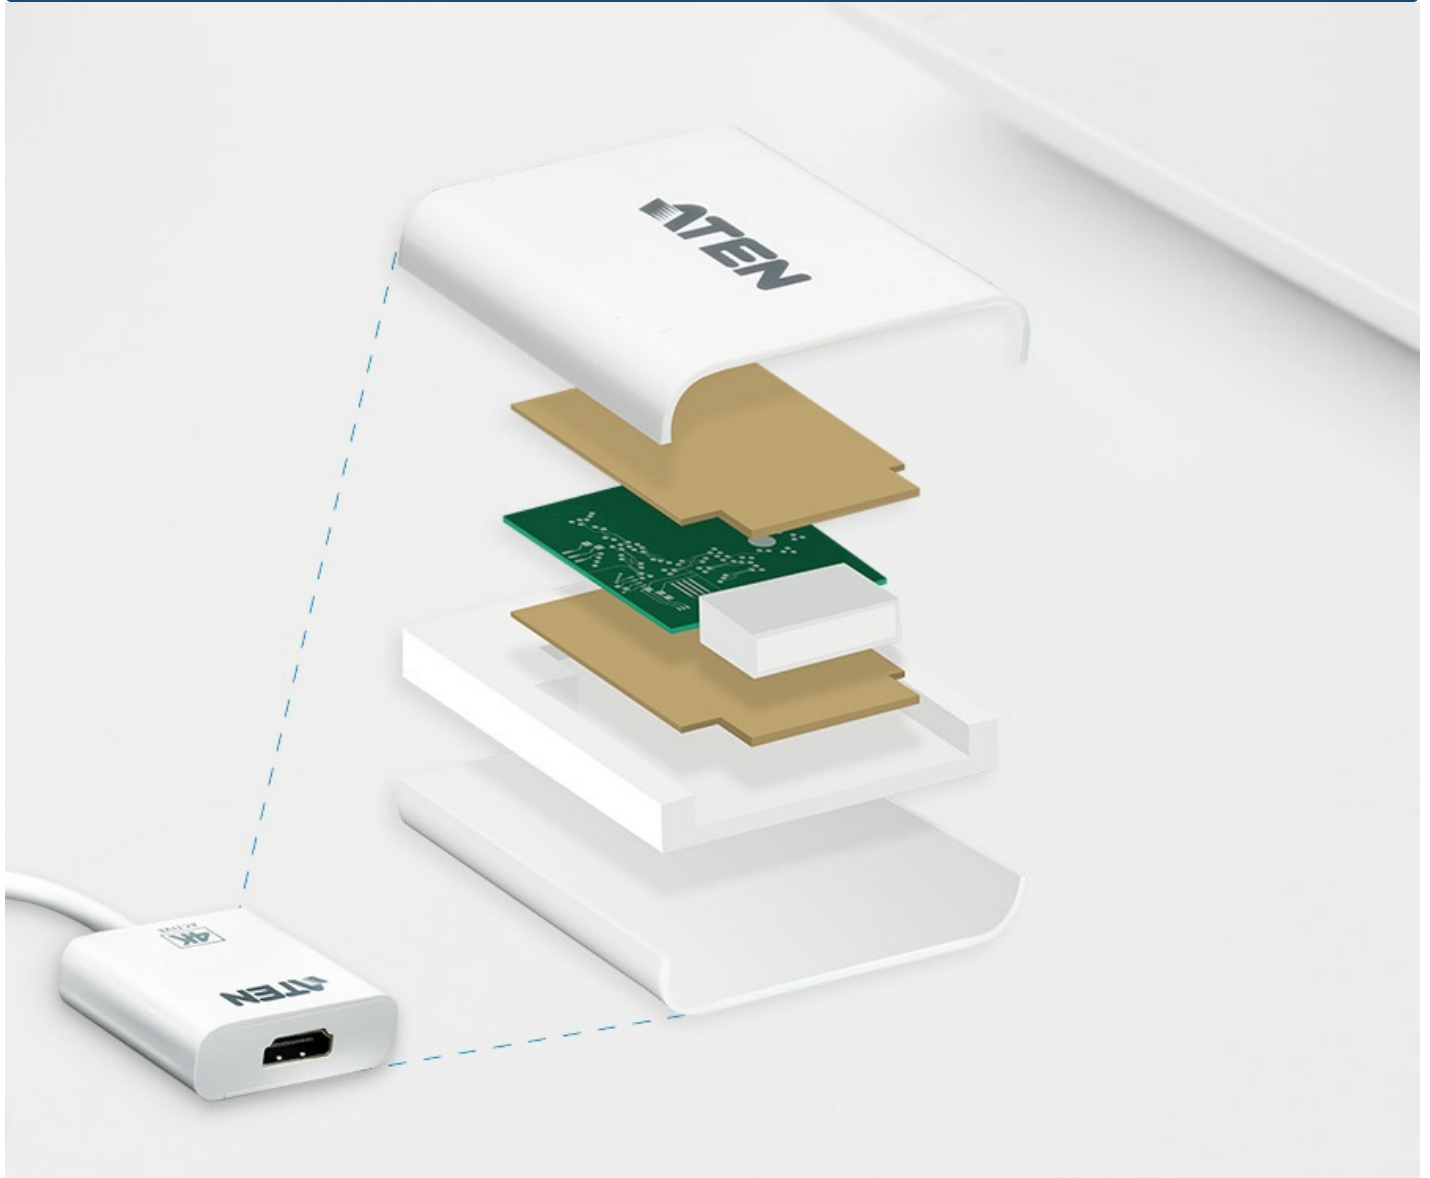

**Superior Signal Quality**

The internal copper foil shielding protection ensures signal integrity and minimizes external interference, giving you extra reliable and superior quality signals.


**AMD Eyefinity Compatible**

Compatible with AMD Eyefinity graphics cards for multiple display applications.



## Talk to Our Experts

If you prefer to have ATEN contact you, please complete the form and a representative will be in touch with you shortly

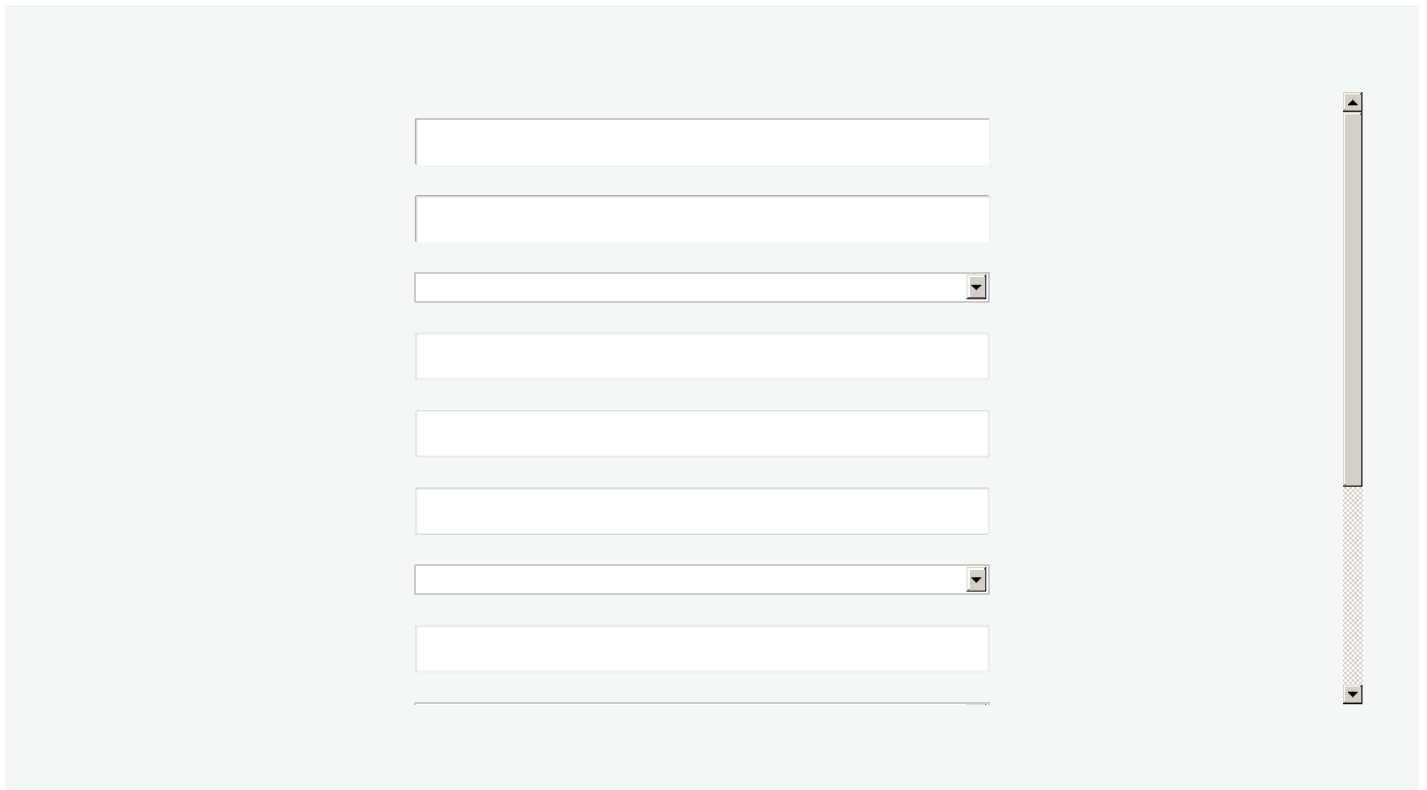

### Features

The VC986 is an active DisplayPort to HDMI adapter that allow you to connect your Mini DisplayPort/DisplayPort output device to the HDMI input of a 4K TV or other display.

The ATEN VC986 is an active adapter, featuring advanced chips which ensure stable video signal conversion even when the video source does not support dual-mode DisplayPort (DP++).\* Moreover, support for resolutions up to 4K make this adapter ideal for users who require a high performance signal conversion solution.

Note:

- \* Dual-mode DisplayPort (DP++) can directly process the signal from DisplayPort to HDMI or DVI signals.
- \* VC986 can only convert DisplayPort signals to HDMI output, and the reverse does not apply.


- Converts DisplayPort signals to HDMI output
- Supports VGA, SVGA, XGA, SXGA, UXGA, 1080p and resolutions up to 4K UHD
- [Active adapter](#) – features an advanced chip which ensures stable video signal conversion even when the video source does not support dual-mode DisplayPort (DP++)\*
- [Supports AMD Eyefinity™ Technology \(multi-screen setups\)](#)
- Audio supported
- No software or driver installation required

## Specifications

Video Input	
Interfaces	1 x DisplayPort Male (White)
Video Output	
Interfaces	1 x HDMI Type A Female (Black)
Video	
Max. Pixel Clock	297 MHz
Max. Resolution	3840x2160@30Hz, 1920 x 1200@60Hz.
Compliance	DP1.2a, HDMI (3D, Deep Color, 4K), HDCP 1.3
Audio	
Output	1 x HDMI Type A Female (Black)
Environmental	
Operating Temperature	0 - 50 °C
Storage Temperature	-20–60 °C
Humidity	0 - 80% RH, Non-Condensing
Physical Properties	
Housing	Plastic
Weight	0.04 kg ( 0.09 lb )
Dimensions (L x W x H)	18.00 x 4.50 x 1.50 cm (7.09 x 1.77 x 0.59 in.)
Carton Lot	40 pcs
Note	For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format.

---

Diagram

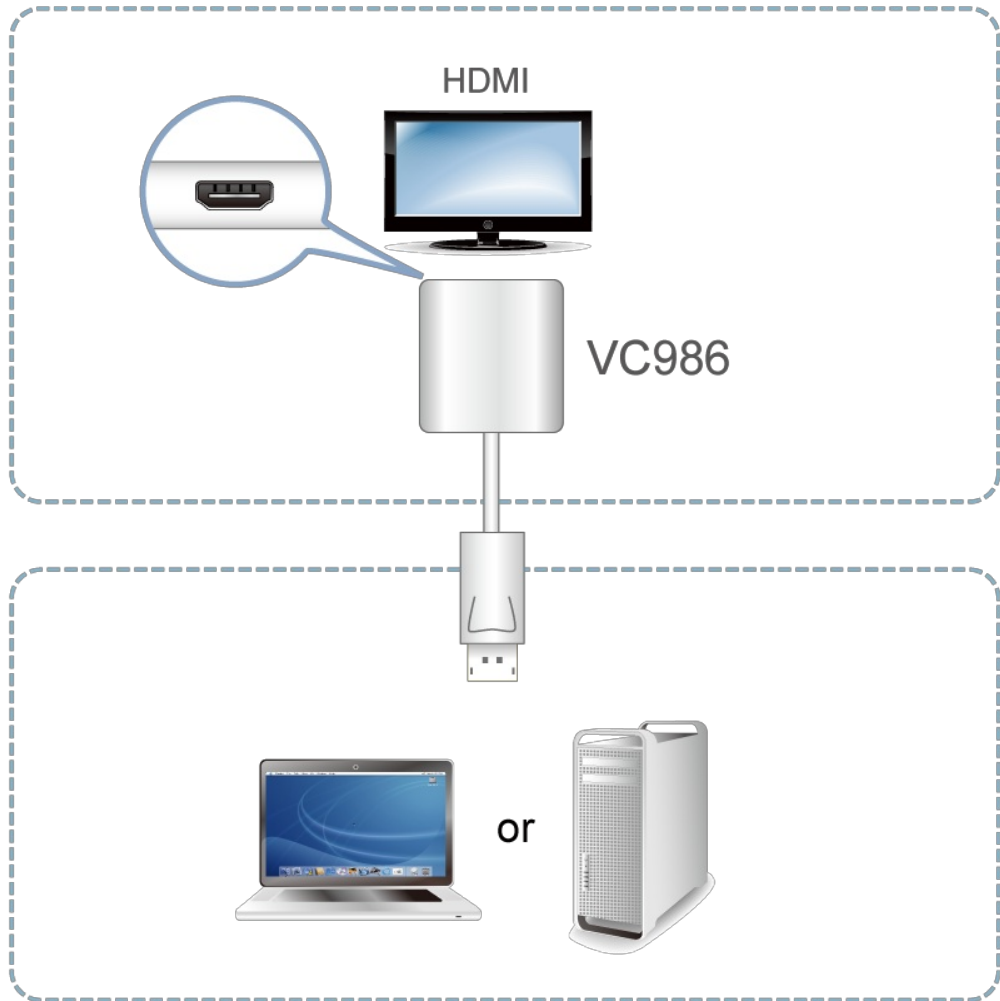

**HDMI™**  
HIGH-DEFINITION MULTIMEDIA INTERFACE

---