

## CS82U

2-Port PS/2-USB VGA KVM Switch



The CS82U PS/2-USB KVM Switch is a desktop control unit that allows users to access two computers from a single KVM console (PS/2 or USB keyboard and mouse, and VGA monitor). In addition, CS82U comes with ATEN's new Video DynaSync™ technology, which eliminates boot-up display problems and optimizes resolution.

Setup is fast and easy; simply plug cables into their appropriate ports. There is no software to configure, no installation routines, and no incompatibility problems. Since the CS82U intercepts keyboard input directly, it will work on multiple computing platforms.

### Features

- One PS/2-USB VGA console controls two VGA interface computers.
- [Dual Interface](#) - supports computers with PS/2 or USB keyboards and mice
- [Computer selection via front panel pushbuttons, hotkeys, and mouse](#)
- Multiplatform support - Windows, Linux, Mac, and Sun
- Superior video quality - 2048 x 1536; DDC2B
- [Video DynaSync™](#) - Exclusive ATEN technology eliminates bootup display problems and optimizes resolution when switching between ports
- [Console mouse port emulation/bypass feature](#) supports most mouse drivers and multifunction mice
- Complete keyboard emulation for error-free booting
- Mac/Sun keyboard support and emulation\*
- [Multilingual keyboard mapping](#) - supports English, Japanese, and French keyboards
- [Gaming keyboard support](#)
- Auto Scan Mode for monitoring all computers
- Firmware upgradable
- Bus-Powered


\* 1. PC keyboard combinations emulate Mac/Sun keyboards

2. Mac/Sun keyboard work only with their own computers

## Specifications

|                        |  |
|------------------------|--|
| Computer Connections   | 2  |
| Port Selection         | Hotkey, Pushbutton, USB Mouse  |
| Connectors             |  |
| Console Ports          | 1 x HDB-15 Female (Blue)<br>2 x USB Type A Female<br>1 x 6-pin Mini-DIN Female (Purple)<br>1 x 6-pin Mini-DIN Female (Green)   |
| KVM Ports              | 2 x SPHD-18 Female (Yellow)  |
| Power                  | 1 x DC Jack  |
| Switches               |  |
| Selected               | 2 x Pushbutton   |
| LEDs                   |  |
| Online                 | 2 (Orange)   |
| Selected               | 2 (Green)  |
| Emulation              |  |
| Keyboard / Mouse       | PS/2, USB  |
| Video                  | 2048 x 1536 @ 60 Hz; DDC2B   |
| Scan Interval          | 3, 5, 10, 20 seconds (default: 5 secs.)  |
| Power Consumption      | DC5V:0.72W:12BTU/h<br><br>Note:<br>● The measurement in Watts indicates the typical power consumption of the device with no external loading.<br>● The measurement in BTU/h indicates the power consumption of the device when it is fully loaded. |
| Environmental          |  |
| Operating Temperature  | 0 - 50°C   |
| Storage Temperature    | -20 - 60°C   |
| Humidity               | 0-80% RH, Non-condensing   |
| Physical Properties    |  |
| Housing                | Metal  |
| Weight                 | 0.54 kg ( 1.19 lb )  |
| Dimensions (L x W x H) | 14.00 x 8.80 x 5.55 cm<br>(5.51 x 3.46 x 2.19 in.)   |
| Note                   | For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format.  |

## Diagram

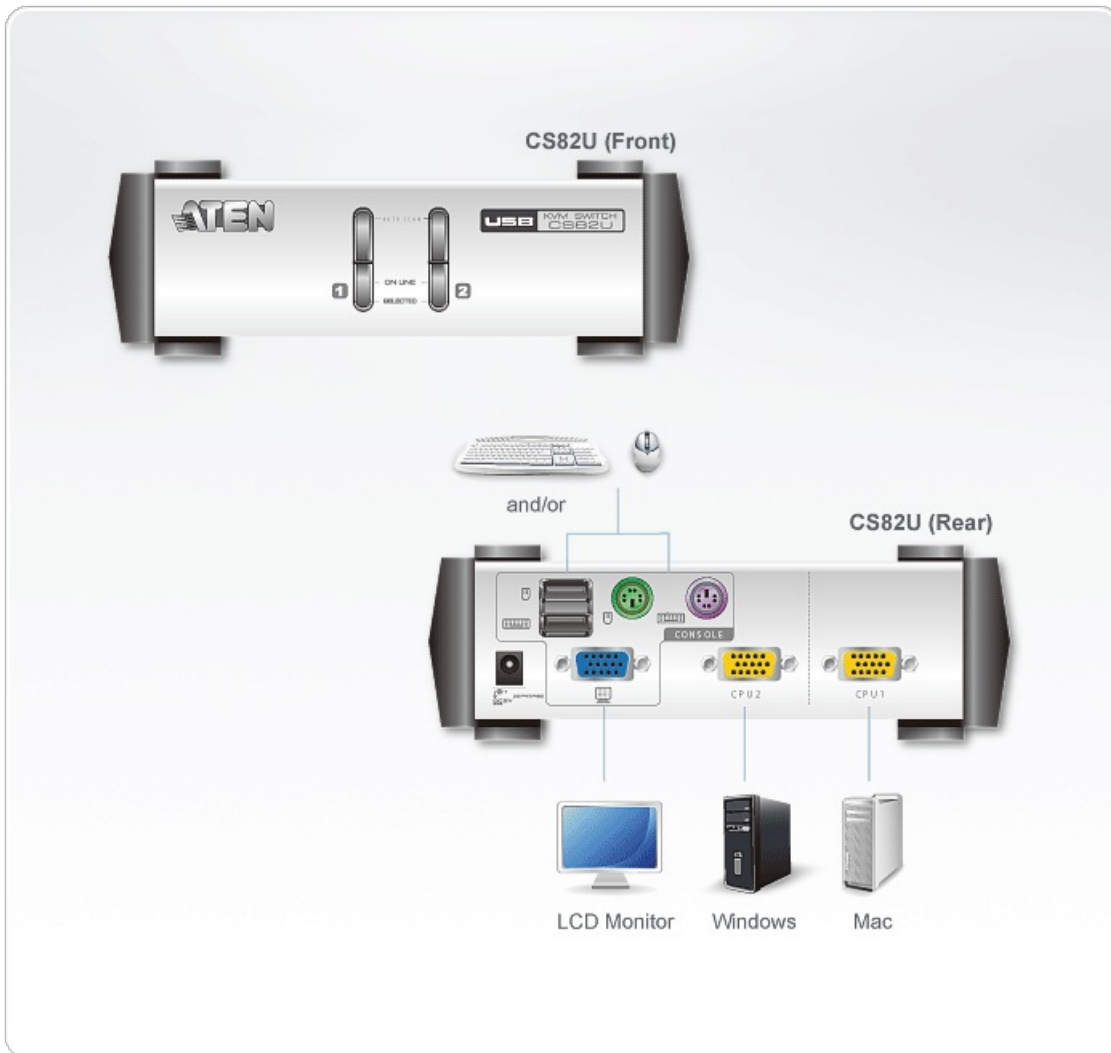

### ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan

Phone: 886-2-8692-6789 Fax: 886-2-8692-6767

www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.  
 ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.  
 All rights reserved. All other trademarks are the property of their  
 respective owners.