

CN8000A

1-Local/Remote Shared Access Single Port VGA KVM over IP Switch



The new generation ATEN CN8000A features superior video quality with HD resolutions up to 1920 x 1200 @ 60 Hz, LUC (Laptop USB Console) for easier KVM access, user-friendly local console OSD and virtual media function without additional

ENQUIRE A TEST NOW!

The CN8000A Single Port KVM over IP provides access control through "over-IP" for conventional KVM switches that do not have built in over-IP functionality. It allows system operators to monitor and access computers from remote locations using standard Web browsers or Windows and Java based application programs. The CN8000A connects to the Intranet either LAN or WAN simply by using an industry standard Cat 5e/6 cable, and is connected to a local KVM switch or server via a custom KVM cable.

The ATEN CN8000A uses the standard TCP / IP protocols for communications, it allows the connected server or KVM switch to be accessed from any computer over the internet – whether that computer is located down the hall, in other areas of the country or branch offices in other parts of the world.

The CN8000A expands on previous models by providing a dedicated RS-232 port for modern access or serial console management, a PON port to connect a ATEN PDU device and USB 2.0 virtual media capability.

A Windows Client and a Java Client are available for remote access. They allow IP connection and login from anywhere over the internet. In addition, ATEN also provides an iOS APP - PadClient, whose intuitive interface makes it easy to connect to the KVM over IP switch and control computers direct from your iPad. Please visit the <u>PadClient webpage</u> for more information.

To meet advanced security requirements, the CN8000A's Virtual Media function allows a Smart Card / CAC reader on a user's local system to be mapped to a remote server. The CN8000A provides a fast, reliable and a cost effective way to remotely access and manage widely distributed multiple computer installations.



Features

- Hardware
 Provides over-IP capability to KVM switches that do not have built in over-IP functionality
- Local console provides PS/2, and USB keyboard and mouse support
- Supports multi-platform server environments: Windows, Mac, Sun, Linux and VT100 based serial devices
- Virtual Media Support
- High video resolution up to 1920 x 1200 @ 60 Hz- 24 bit color depth for the local console; up to 1920 x 1200 @ 60 Hz with 24 bit color depth for remote sessions
 Enhanced fps (frames per second) throughput for crisp responsive video display

- management
 Laptop USB Console (LUC) A dedicated USB port directly connects to laptop for easy console operation
 Easy configuration through local console OSD
 Up to 64 user accounts
 Up to 32 users concurrent logins

- Op to a User's concurrent logins
 End session feature administrators can terminate running sessions
 Event logging and Windows-based Log Server support
 Supports instant notification of critical system events via email, SNMP trap, and Syslog
 Remote Firmware upgradable
 Serial console management serial terminal access. Access the CN8000A via a built-in serial viewer, or via third party software (such as PuTTY) for Telnet and SSH sessions
 PPP mode (modem) dial-in-/ dial back / dial out support for out-of-band, and low bandwidth operation
 Port Share Mode allows multiple users to gain access to a server simultaneously
 Local / Remote Share Mode to conveniently grant shared or exclusive console privilence

- Port Share Mode allows multiple users to gain access to a server simultaneously Local / Remote Share Mode to conveniently grant shared or exclusive console privilege Integration with ATEN CC2000 Centralized Management Software Integration with ATEN CCSR Video Session Recording Software Power Over the NET integration for remote power control DDNS (Dynamic Domain Name System)
 Export / import user account and configuration settings
 Enable / disable browser operation

- IPv6 capable
- Easy-to-Use Interface
 Browser-based and AP GUIs offer a unified multi-language interface to minimize user training time and increase productivity

- Browser-based and AP GUIs ofter a unitied multi-language interface to minimize user training time and increase productivity Multi-platform client support (Windows, Mac OS X, Linux, Sun) Multi-browser supports (IE, Chrome, Firefox, Satari, Opera) Browser-based UI in pure Web technology allows administrators to perform administrative tasks without pre-installed Java software package required Full-screen or sizable and scalable Virtual Remote Desktop Magic Panel

- Advanced Security
 Smart Card /CAC Reader Support
 External authentication support: RADIUS, LDAP, LDAPS, and MS Active Directory
 TLS 1.2 encryption to protect password when users log in
- Flexible design allows users to choose any combination of encryption algorithms (e.g. 256-bit AES) or system-generated random selection for independent keyboard/mouse, video, and virtual media data encryption
- Support for IP/MAC Filter Supports password protection Private CA
- Virtual Media

- Virtual media enables file applications, OS patching, software installation and diagnostic testing Works with USB enabled servers in operating system and BIOS level Supports USB 2.0 DVD/CD drives, USB mass storage devices, PC hard drives and ISO images Convenient to use without virtual media cable


- Virtual Remote Desktop
 Video quality and video tolerance can be adjusted to optimize data transfer speed; monochrome color depth setting, threshold and noise settings for compression of the data bandwidth in low bandwidth situations
- Video quality and video tolerance can be adjusted to opin Full screen video display or scalable video display Message Board for communication among remote users On-screen keyboard with multilanguage support Mouse Dynasync Exit Macros support BIOS-level access




Specifications


Connectors	
Console Ports	1 x SPHD Male (Yellow)
KVM (Computer) Ports	1 x SPHD Female (Yellow)
Laptop USB Console (LUC) Port	1 x USB Mini-B Female
PON	1 x DB-9 Male
RS-232	1 x DB-9 Male
LAN Ports	1 x RJ-45 Female
Power	1 x DC Jack
Switches	
Reset	1 x Semi-recessed Pushbutton
LEDs	
Power	1 (Orange)
Link	1 (Green)
10/100/1000 Mbps	1 (Orange / Orange+Green /Green)
Emulation	
Keyboard / Mouse	USB; PS/2
Video	Up to 1920 x 1200 @ 60 Hz; DDC2B
Power Consumption	DC5.3V:4.79W:31BTU/h
	Note: The measurement in Watts indicates the typical power consumption of the device with no external loading. The measurement in BTU/h indicates the power consumption of the device when it is fully loaded.
Environmental	
Operating Temperature	0 - 50°C (CN8000A) 0 - 40°C (Power Adapter)
Storage Temperature	-20 - 60°C
Humidity	0 - 80% RH, Non-condensing
Physical Properties	
Housing	Metal
Weight	0.49 kg (1.08 lb)
Dimensions (L x W x H)	20.00 x 8.14 x 2.50 cm (7.87 x 3.2 x 0.98 in.)
Note	For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format.

Diagram

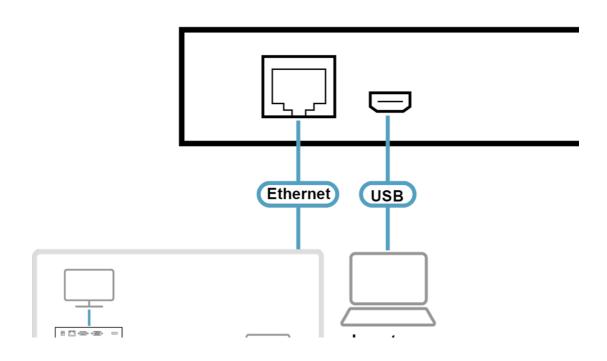



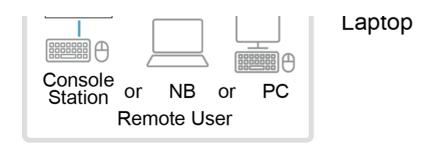

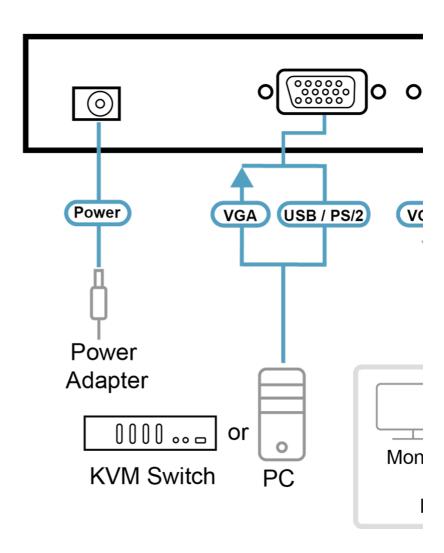

ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan Phone: 886-2-8692-6789 Fax: 886-2-8692-6767

www.aten.com E-mail: marketing@aten.com

