

### **CL3884NW**

4-Port USB HDMI Multi-View Dual Rail WideScreen LCD KVM Switch





The ATEN CL3884NW LCD KVM Switch offers a space-saving, streamlined approach to KVM switch technology by integrating a keyboard, a 18.5" LED-backlit LCD monitor, and a touchpad in a 1U rack-mountable slide housing. The dual rail design enables the LCD monitor, keyboard and touchpad to operate independently of each other. To maximize space utilization, the keyboard and touchpad modules can slide back to "hideaway" when not in use, while the LCD monitor rotates back, flush against the rack, to allow convenient monitoring of computer activity.

The CL3884NW offers dual console outputs that guarantees users real-time monitoring functionality. Users can control both outputs to display the following display modes: Quad View, Picture in Picture (PiP), Picture by Picture (PbP), and Picture on Picture (PoP). The display modes have different layout options to allow users to customize which sources are being displayed. In addition, being able to cascade up to 2 levels, the CL3884NW can reach up to a maximum of 16 video sources that can be simultaneously displayed and controlled with independent keyboard and mouse.

Featuring Boundless Switching, the CL3884NW allows users to switch control to another computer by simply moving the mouse cursor across a screen border and onto the target computer display



without limitations. With patented ATEN technology – Video DynaSync TM, users can enjoy better display resolutions and faster switching between systems. What's more, the EDID modes are available for smooth power-up, high-quality display that eliminate monitor compatibility issue.

For added convenience, users can choose to manage the computer from an external console. The CL3884NW features a USB peripheral port on the unit's front panel, ports for the external KVM console (USB keyboard/mouse and HDMI monitor) on the rear panel, and audio ports for connecting audio speakers.

The CL3884NW is a feature-rich LCD KVM switch which exceeds the requirements for control room applications in any industry in terms of its capabilities of optimizing video quality, space utilization, adaptive deployment, and operational versatility.

Note: Optional rack mount kits are available. For more information, refer to Compatible Accessories below.

#### LCD KVM Consoles and Switches

#### Space-optimizing KVM solutions for server rooms

LCD KVM Consoles and Switches are space-optimizing KVM solutions for server rooms and are specifically designed for short rack applications, including limited-space telecoms, broadcasting, and surveillance server rooms.

The benefits of using LCD KVM consoles and switches in your server room or other rack applications are varied, and include:

	All-in-One Design	The LCD panel, keyboard, and touchpad are integrated into a 1U rack-mountable sliding housing
	Control Attached Servers Directly	Easily and conveniently control servers through LCD KVMs
455 455	Multiplatform Support	LCD KVMs support PC*, Mac and Sun
	Supports Popular Video Interfaces	LCD KVM switches can connect to DP**, HDMI, DVI, and VGA
Sp.	LED Illumination	Exclusive LED illumination lights up the keyboard and touchpad for better visibility in low-light conditions
S	Easy Installation	Optional Single-Person Easy Installation Rack Mount Kits are also available
r.	Multi-View Display	Controls up to four video sources on one screen with display modes including Quad View, Picture in Picture (PiP), Picture by Picture (PbP), and Picture on Picture (PoP)

The Types of LCD KVM Solutions





LCD KVM Switch/Console - Model Selection Guide

Multi-Interfaces			KL1508AM* KL1508AN*	KL1516AM* KL1516AN*	Panel resolution  ● 1280x1024
HDMI/DVI/VGA	<ul><li>CL3800NW*# CL3800NX*#</li><li>CL6700MW CL6700N</li></ul>				• 1366x768 • 1920x1080 LCD Panel
HDMI	• CL3700NW#	• CL3884NW*			-M: 17"
DVI			• CL6708MW		-MW: 17.3" wide-screen
VGA	CL1000M CL1000N CL3000N • CL3100NX# CL5800N*		• CL3108NX CL1308N CL5808N* CL5708M • CL5708MW CL5708N	• CL3116NX CL1316N CL5816N* CL5716M • CL5716MW CL5716N	-N: 19" -NW: 18.5" wide-screen Features *Dual Rail #Ultra Short Depth
	1-Port	4-Port	8-Port	16-Port	_



#### **Buy from Your Favorite Store**

Australia:











#### Features

## Reliability and Operational Versatility

- Multi-view console controls up to four video sources on one screen with display modes including Quad View, Picture in Picture (PiP), Picture by Picture (PbP), and Picture on Picture (PoP)
- Quick Access Toolbar intuitive user interface for editing
- Supports an extra console via USB/HDMI connectors for up to two console displays\*
- Display mode layout customization
- Superior video quality 1920 x 1200 @ 60 Hz
- Computer selection via pushbuttons, hotkeys, OSD, and RS-232 commands
- Boundless Switching simply moves the mouse cursor across windows to switch to other video sources

  Video DynaSync™ an exclusive ATEN technology that eliminates boot-up display problems and optimizes the resolution when switching among different sources
- Easily resizes and/or repositions any PiP or PbP to suit users' viewing needs

  EDID Expert™ selects optimum EDID settings for smooth power- up, high-quality display and use of the best video resolution across different screens

  Cascade up to 2 levels controls up to 16 computers (with up to 4 x 4 Multi-View mode)
- Auto Scan mode enables continuous monitoring of user-selected computers

  Broadcast mode allows users to send commands from the console to all computers to perform operations simultaneously
- Additional hot-pluggable USB peripheral port on front panel
- \*Both outputs can provide a combination of multi-view display modes simultaneously. However, users can only have one of the two outputs set to full-screen mode.

# Space Utility Optimization

- Exclusive LED illumination light designed by ATEN to illuminate the keyboard and touchpad to allow visibility in low-light conditions
- Integrated KVM console with an 18.5" LED-backlit widescreen LCD monitor in a dual rail housing with top and bottom clearance for smooth operation in a 1U high system rack
- Dual rail design allows LCD monitor and keyboard/touchpad modules to operate independently
- Console lock enables the console drawer to remain securely locked away in position when not in use

### · Installation Flexibility

- Standard rack mount kit included
- Optional rack mount kits available, including easy installation options\*
- No software required
- Firmware upgradable
- Supports hot-plugging

More information about "Easy Rack Mounting"...

#### Specifications

Computer Connections	
Direct	4




Maximum	16 (via Cascade)	
Port Selection	OSD, Hotkey, Pushbutton, RS-232 Command	
Connectors		
KVM Ports	4 x HDMI Female 4 x USB Type B Female 4 x 3.5mm Audio Jack Female (Green)	
Power	1 x IEC 60320/C14	
Serial	1 x RJ-45 Female	
External Console Ports	1 x HDMI Female 2 x USB Type A Female 1 x 3.5mm Audio Jack Female (Green)	
USB Port	1 x USB Type A Female (Front)	
Switches		
Port Selection	4 x Pushbutton	
Multi-View Mode	5 x Pushbutton	
Display Mode	3 x Pushbutton	
Reset	1 x Semi-recessed Pushbutton	
Firmware Upgrade	1 x Slide Switch	
Power	1 x Rocker Switch	
LCD Control	4 x Pushbutton	
LCD Power	1 x LED Pushbutton	
LEDs		
Power	1 (Dark Green)	
Lock	1 x Num Lock (Green) 1 x Caps Lock (Green) 1 x Scroll Lock (Green)	
LED Illumination Light	1 x LED Illumination Light	
Panel Spec		
LCD Module	18.5" TFT-LCD	
Resolution	1920 x 1080 @ 60 Hz	
Response time	20 ms	
Viewing Angle	178° (H), 178° (V)	
Support Color	16.77M colors	
Contrast Ratio	1000 : 1	
Luminance	350 cd/m <sup>2</sup>	
Video		
Input Video Resolution	1920 x 1200 @ 60 Hz	
Second console	1920 x 1200 @ 60 Hz	
Scan Interval	5, 10, 15, 30, 60, 90 seconds (default: 5 seconds)	
Emulation		
Keyboard / Mouse	USB	




Power Consumption	AC110V:35.2W:171BTU/h AC220V:35.7W:174BTU/h  Note:  The measurement in Watts indicates the typical power consumption of the device with no external loading.  The measurement in BTU/h indicates the power consumption of the device when it is fully loaded.
Environmental	
Operating Temperature	0-40°C
Storage Temperature	-20-60°C
Humidity	0-85% RH, Noncondensing
Physical Properties	
Housing	Metal
Rail Type	Dual Rail
Weight	11.20 kg ( 24.67 lb )
Dimensions (L x W x H)	48.06 x 63.10 x 4.28 cm (18.92 x 24.84 x 1.69 in.)
Body Dimensions(L x W x H)	44.92 x 58.40 x 4.28 cm (17.68 x 22.99 x 1.69 in.)
Note	For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format.



Diagram

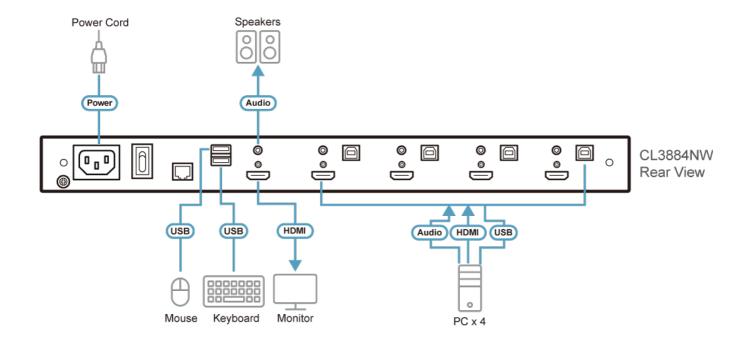

# ATEN International Co., Ltd.





© Copyright 2015 ATEN® International Co., Ltd.
ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.
All rights reserved. All other trademarks are the property of their respective owners.