
PE0324B

0U Basic PDU

PE0324B



ATEN's Basic PDU family is extended with 0U members containing 24 outlets and available in IEC socket configurations. The compact aluminum housing gives a sleek, yet robust look while minimizing installation space for work space efficiency. The Basic PDUs are tailored made for individuals who are in need of industrial-grade, easy-to-deploy power distribution unit in data centers, server rooms, and network wiring closets.


Features

- Space saving – 0U rack mount design
- IEC outlet model
- Aluminum material
- Works with data centers, server rooms, and telecom equipment

Specifications

Electrical	
Nominal Input Voltage	100-240 VAC
Maximum Input Current	30A Max (UL de-rated 24A Max)
Input Frequency	50-60 Hz
Input Connection	NEMA L6-30P
Input Power	7200VA(Max); 5760VA(UL de-rated)
Outlet Type	(2) IEC 320 C13, (2) IEC 320 C19
Maximum Output Current (Outlet)	C13: 15A Max (UL de-rated 12A Max) C19: 20A Max (UL de-rated 16A Max)
Maximum Output Current (Bank)	20A Max (UL de-rated 16A Max)
Maximum Output Current (Total)	30A Max (UL de-rated 24A Max)
OPD(Overcurrent Protection Device)	Yes
Physical Properties	
Dimensions (L x W x H)	120.71 x 4.44 x 6.00 cm (47.52 x 1.75 x 2.36 in.)
Weight	2.80 kg (6.17 lb)
Power Cord Length	10ft(10#)
Environmental	
Temperature (Operating / Storage)	0 – 40°C / -20 – 60°C
Elevation (Operating / Storage)	3000m
Compliance	
EMC Verification	FCC Class A
Safety Verification	UL, other by request
Note	For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format.

Diagram

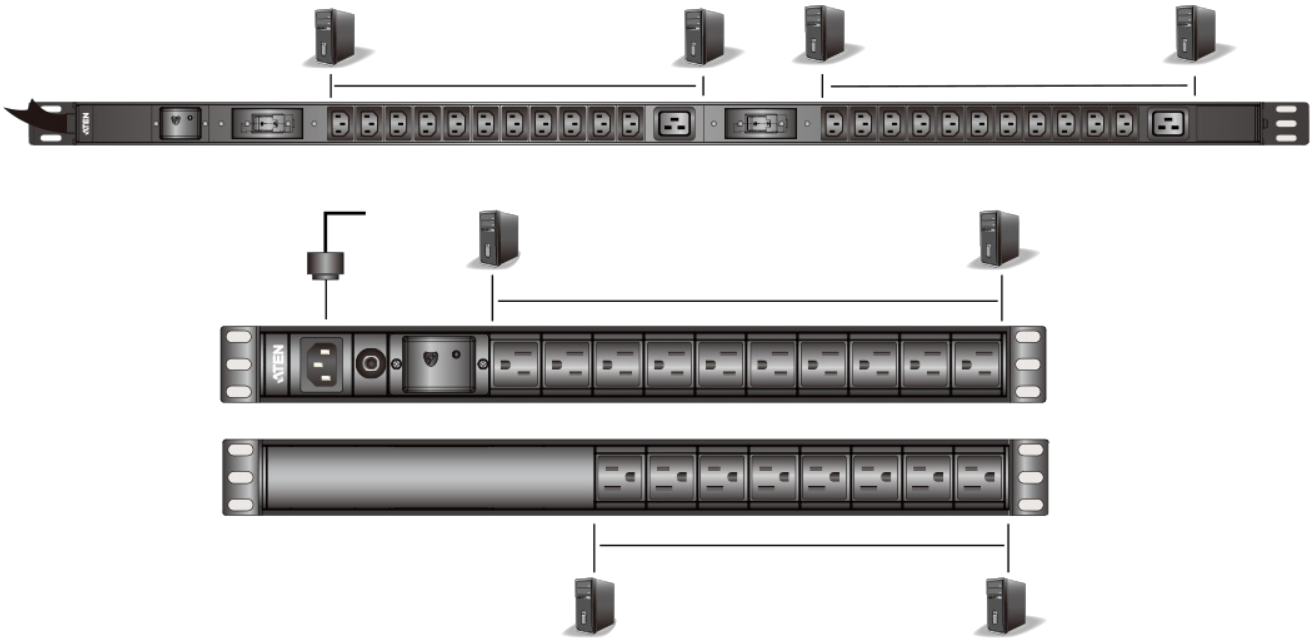

Note: (1) As there are many Basic PDUs, PE0324S (top) and PE0118S (bottom) are the respective 0U and 1U examples used here.
