

VE1812T

HDMI HDBaseT Transmitter with POH (4K@100m) (HDBaseT Class A)



The VE1812T features Power over HDBaseT (POH) which sends power from Tx to Rx over Cat 5e / 6 / 6a cable without any additional power supply. The VE1812T supports RS-232 and IR signaling pass-through, allowing you to control the HDMI source device from the receiver unit ([VE1812R](#)) while also accessing the HDMI display device from the transmitter unit (VE1812T). The IR signals can also be extended in both directions.

The VE1812T HDMI HDBaseT Transmitter with POH is HDMI (3D, Deep Color, 4kx2k) and HDCP compatible. When transmitting HDMI / 4K with a Cat 6a or ATEN [2L-2910](#) Cat 6 cable, the maximum distance can reach up to 100 meters. With Long Reach Mode enabled, the VE1812T can extend HDMI signal up to 150m @1080p. The VE1812T is perfect for digital classrooms, video conference rooms, gaming or any installation that requires superior video quality.



Features

- HDBaseT Connectivity – extends an HDMI connection over a long distance via one Cat 5e / 6 / 6a cable
- Supports HDBaseT Long Reach Mode – Up to a maximum range of 150 meters @ 1080p
- 4k x 2k HDMI transmission distance up to 100m over Cat 6a or ATEN [2L-2910](#) Cat 6 cable
- HDBaseT Anti-jamming – resists signal interference during high - quality video transmission using HDBaseT technology
- POH (Power over HDBaseT) – supplies power from Transmitter to Receiver over a long distance via one Cat 5e / 6 / 6a cable
- Bi-directional RS-232 channel – allows you to connect to serial terminals or serial devices, such as touch screens and barcode scanners
- Bi-directional IR channel – Two way IR protocol delivery by one IR port; IR transmission is processed one direction at a time
- Rack- Mountable

Specifications


Video Input	
Interfaces	1 x HDMI Type A Female (Black)
Impedance	100 Ω
Max. Distance	1.8 m
Video	

Max. Data Rate	10.2Gbps (3.4Gbps per lane)
Max. Pixel Clock	340 MHz
Compliance	HDMI (3D, Deep Color, 4K) HDCP Compatible Consumer Electronics Control (CEC)
Max. Resolutions / Distance	Up to 4K@70m (Cat 5e/6) / 100m (Cat 6a/ATEN 2L-2910 Cat6); 1080p@100m (Cat 5e/6/6a) *4K supported: 4096 x 2160 / 3840 x 2160 @ 60Hz (4:2:0); 4096 x 2160 / 3840 x 2160 @ 30Hz (4:4:4)
Audio	
Input	1 x HDMI Type A Female (Black)
Connectors	
Unit To Unit	1 x RJ-45 Female
Power	1 x DC Jack (Black) with locking
Control	
RS-232	Connector: 1 x Terminal Block, 3 pole Baud Rate: 19200, Data Bits:8, Stop Bits:1, no parity and flow control
IR	1 x Mini Stereo Jack Female (Black)
Switches	
Long Reach Mode Switch	1 x Slide Switch - ON/OFF
Firmware Upgrade	1 x Slide Switch - ON/OFF
Power Consumption	DC5V:3.2W:15BTU POE:9.96W:47BTU
Environmental	
Operating Temperature	0 - 40°C
Storage Temperature	-20 - 60°C
Humidity	0 - 80% RH, Non-Condensing
Physical Properties	
Housing	Metal
Weight	0.47 kg (1.04 lb)
Dimensions (L x W x H) with bracket	14.04 x 12.30 x 3.00 cm (5.53 x 4.84 x 1.18 in.)
Dimensions (L x W x H) without bracket	13.60 x 10.10 x 2.90 cm (5.35 x 3.98 x 1.14 in.)

Note

For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format.

Diagram

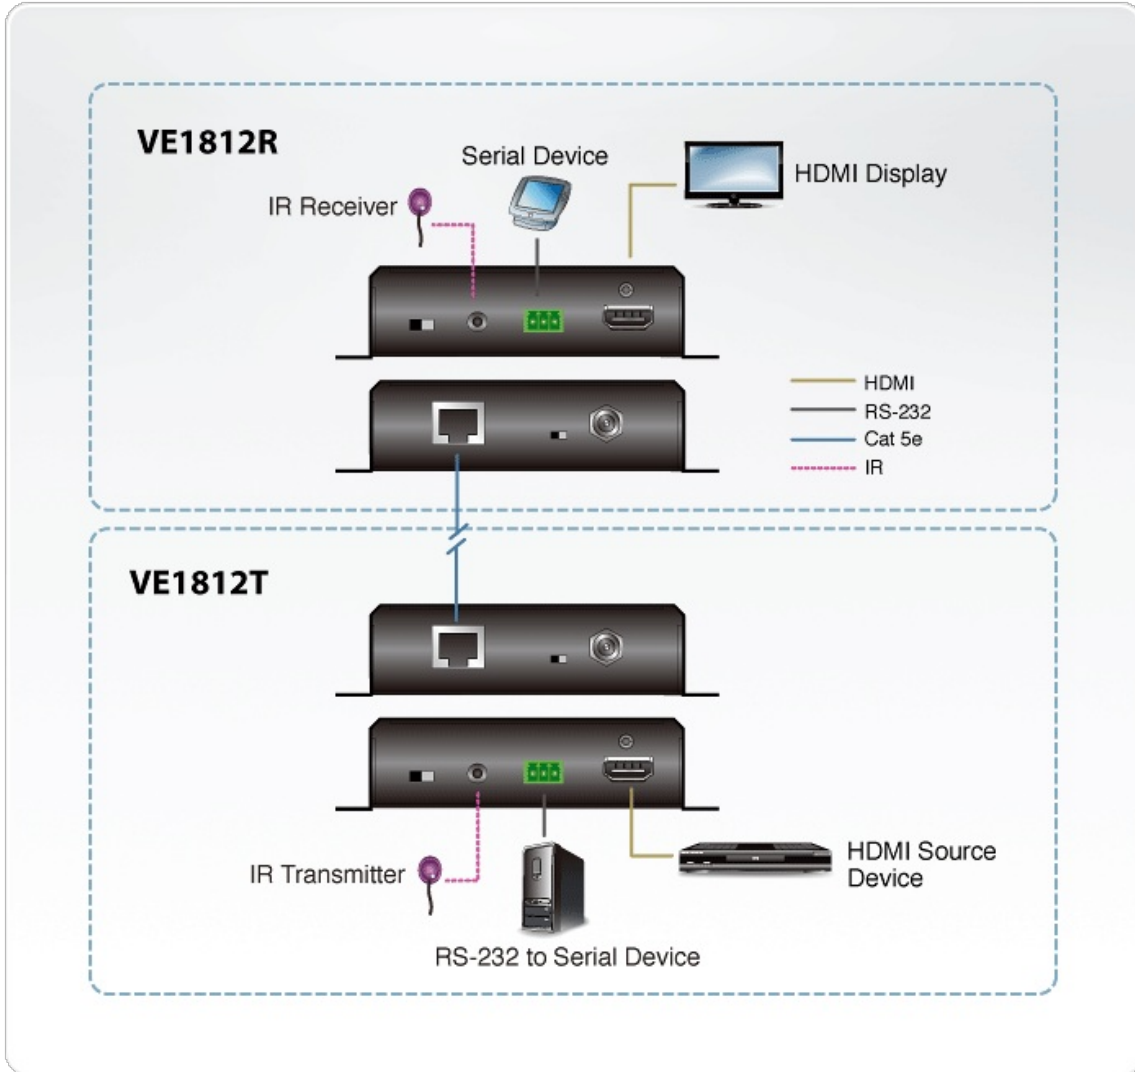

ATEN International Co., Ltd.

3F, No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan
 Phone: 886-2-8692-6789 Fax: 886-2-8692-6767
 www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.
 ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.
 All rights reserved. All other trademarks are the property of their respective owners.