

# **VE500T**

VGA/Audio/RS-232 Cat 5 Transmitter with Auto Compensation (1280 x 1024@300m (RQ))



The VE500T A/V Over Cat 5 Transmitter is exclusively designed to integrate seamlessly with the ATEN <u>VM0808T/VM1616T</u> Matrix Switch to extend signals up to 300m from the source to the switch using Cat 5e cables. The <u>VE300</u> is ideal for installations such as construction sites, factory floors, and control and security centers – where the system equipment can reside in a safe and secure location, while the display is conveniently located in public view.

#### Features

- Long Distance Transmission up to 300 m
- Superior audio quality balanced audio provides flawless long-distance transmission
- Provides RS-232 channel
- Supports wide screen
- Rack Mountable




### Specifications

Video Input	
Interfaces	1 x HDB-15 Male (Blue)
Impedance	75 Ω
Video Output	
Interfaces	1 x HDB-15 Female (Blue)
Impedance	75 Ω
Video	
Max. Bandwidth	300 MHz
Audio	
Input	Balanced: 1 x Captive Screw Connector, 5 pole (Green) Stereo: 1 x Mini Stereo Jack Female (Green)
Control	
RS-232	Connector: 1 x DB-9 Female (Black) Serial Control Pin Configurations: Pin 2 = Rx, Pin 3 = Tx, Pin 5 = Gnd
Connectors	
Power	1 x DC Jack (Black)
Power Consumption	DC5.3V:2.2W:10BTU/h
	Note: • The measurement in Watts indicates the typical power consumption of the device with no external loading. • The measurement in BTU/h indicates the power consumption of the device when it is fully loaded.
Environmental	Į.
Operating Temperature	0-50°C
Storage Temperature	-20 - 60°C
Humidity	0 - 80% RH, Non-Condensing
Physical Properties	
Housing	Metal
Weight	0.48 kg(1.06 lb)
Dimensions (L x W x H)	20.20 x 8.64 x 2.50 cm (7.95 x 3.4 x 0.98 in.)
Carton Lot	5 pcs



#### Diagram

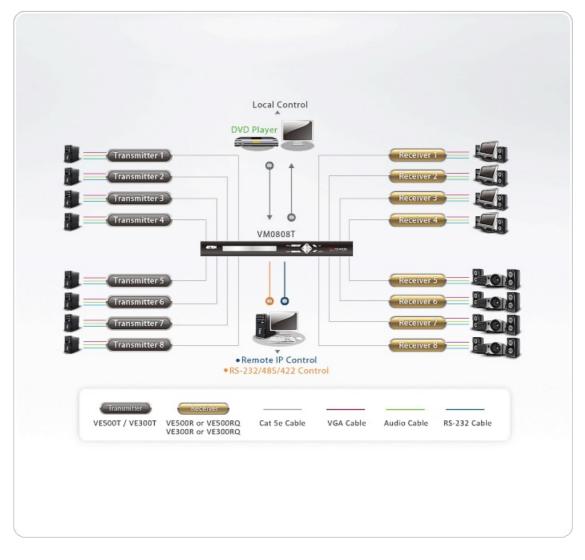

## ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan Phone: 886-2-8692-6789 Fax: 886-2-8692-6767 www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd. ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd. All rights reserved. All other trademarks are the property of their respective owners.