


VS162

2-Port DVI/Audio Splitter



VS162 Video Splitter provides DVI video and audio input signals to 2 DVI video and audio outputs after duplication and boosting. They are ideal for any type of broadcasting environment, classrooms, or by power computer users.

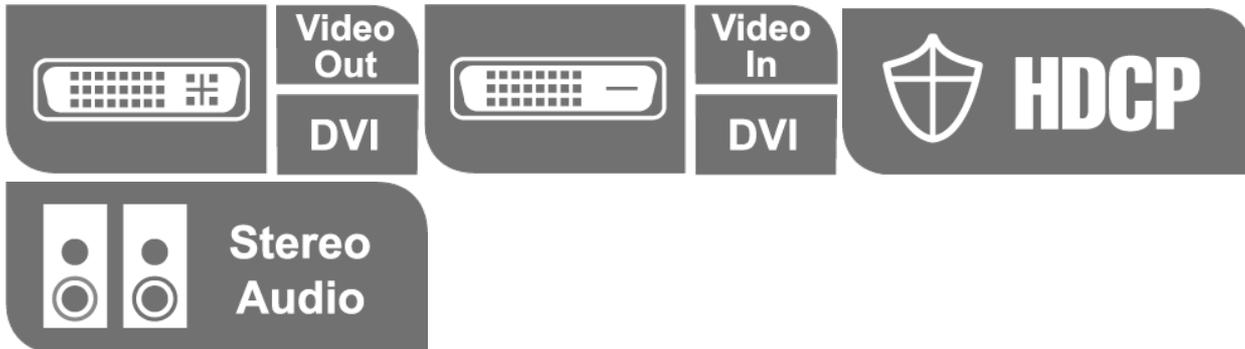

Features

- Connects computers with DVI graphics to multiple DVI compatible monitors or projectors.
- Fully compliant with DVI-Digital and DVI-Analog.
- Supports DDWG (Digital Display Working Group) standard for DVI compliant monitors.
- Speaker enabled for audio enjoyment.
- Cascadable to 3 levels - provides up to 8 video signals.
- Cascade distance: Source to Device -1.8m, Device to Device-5m, Device to Display-5m.
- Installs in minutes.
- Maintains highest single link video resolution (up to 1920 x 1200).
- DDC, DDC2, DDC2B Compatible (Port 1 only).
- HDCP Compliant.
- OS Support: Windows 2000, Windows XP, Linux, Mac and Sun


Specifications

Video Input	
Interfaces	1 x DVI-I Female (White)
Impedance	100 Ω
Max. Distance	1.8 m
Video Output	
Interfaces	2 x DVI-I Female (White)
Impedance	100 Ω
Video	
Max. Data Rate	6.75 Gbps (2.25 Gbps Per Lane)
Max. Pixel Clock	225 MHz
Compliance	HDCP Compatible
Max. Resolution	Up to 1920 x 1200
Max. Distance	Up to 5 m
Audio	
Input	1 x Mini Stereo Jack Female (Green)
Output	2 x Mini Stereo Jack Female (Green)
Connectors	
Power	1 x DC Jack
Power Consumption	DC5.3V:2.36W:11BTU/h Note: <ul style="list-style-type: none"> ● The measurement in Watts indicates the typical power consumption of the device with no external loading. ● The measurement in BTU/h indicates the power consumption of the device when it is fully loaded.
Environmental	
Operating Temperature	0-50°C
Storage Temperature	-20 - 60°C
Humidity	0 - 80% RH, Non-Condensing
Physical Properties	
Housing	Metal
Weight	0.62 kg (1.37 lb)
Dimensions (L x W x H)	21.00 x 8.80 x 5.55 cm (8.27 x 3.46 x 2.19 in.)
Carton Lot	5 pcs
Note	For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format.


Diagram



VS162
(Front)

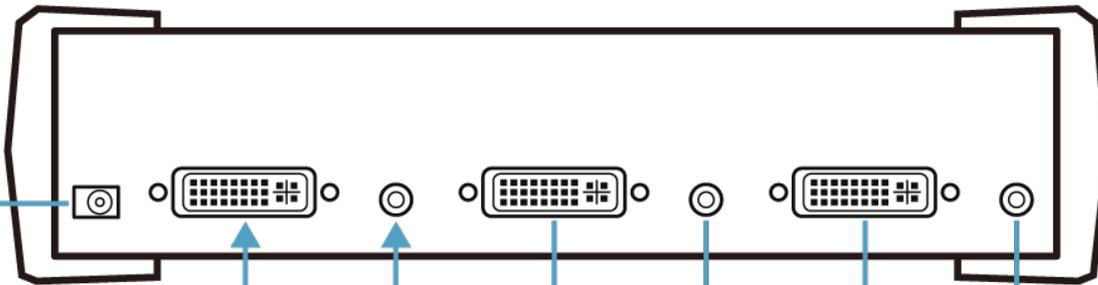

VS162
(Rear)

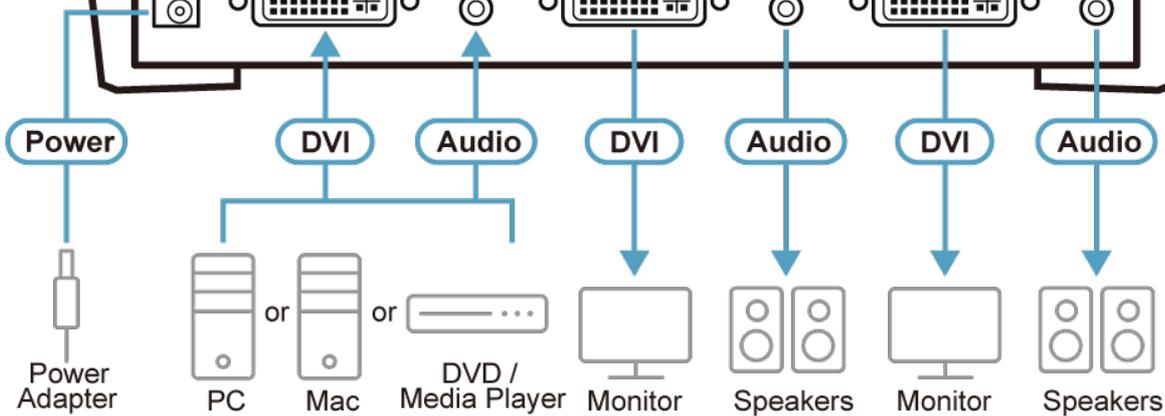

ATEN International Co., Ltd.

3F, No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan
 Phone: 886-2-8692-6789 Fax: 886-2-8692-6767
 www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.
 ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.
 All rights reserved. All other trademarks are the property of their respective owners.