

## VS1828KIT

8-Port 4K HDMI Cat 6 Splitter with Receivers



The VS1828KIT is a kit that includes 1 splitter and 8 receivers, distributing an HDMI source at up to 4K @ 30 Hz (4:4:4) to 8 displays up to 40m away via a single Cat 6 cable. The system also supports lossless digital audio formats such as LPCM 7.1CH, Dolby TrueHD, Dolby Digital Plus & DTS-HD Master Audio. Only one power adapter for the splitter is needed as a result of the receivers being powered by the splitter thanks to the Power over Cable (PoC) functionality, which also helps avoid cluttered cable installation. An HDMI local output port is built on the splitter for content monitoring or cascading purposes. Moreover, the splitter contains a user-adjustable EDID switch, enabling users to configure the output video resolutions and audio capabilities for seamless integration across the system. The receiver's ultra lightweight, palm-sized enclosure ensures flexible installation including mounting and placement in tight spaces.

The kit comes with 1 IR blaster cable for the splitter and 8 IR receiver cables for receivers, allowing users to remotely control the source device from the receiver side. With plug-and-play operation, no software is required, enabling easy, immediate installation. The VS1828KIT delivers excellent AV transmission quality and installation flexibility within different installation scenarios, from meeting facilities, retail settings, showrooms, entertainment systems, and more.



### Features


- A kit that includes 1 splitter and 8 receivers to distribute 1 HDMI source to 8 displays up to 40m away via a single Cat 6 cable
- Supports up to 4K @ 30 Hz (4:4:4) for crystal-clear video presentation
- Supports lossless digital audio formats such as LPCM 7.1CH, Dolby TrueHD, Dolby Digital Plus & DTS-HD Master Audio
- HDMI (3D, Deep Color, 4K); HDCP 1.4 compliant
- Power over Cable (PoC) functionality from splitter to receivers to avoid cluttered cable installation
- HDMI local output port on splitter for content monitoring or cascading purposes
- User-adjustable EDID switch on splitter for output video resolutions and audio capabilities configuration
- [VE1821R](#)'s ultra lightweight, palm-sized case enables flexible installation including mounting and placement in tight spaces
- One-way IR channel for remote control of the source device from the receiver side
- Built-in 4KV/8KV ESD protection
- Plug-and-play – no additional software needed

### Specifications

| Function      | VE1821R                        | VS1828T                        |
|---------------|--------------------------------|--------------------------------|
| Video Input   |                                |                                |
| Interfaces    | N/A                            | 1 x HDMI Type A Female (Black) |
| Impedance     | N/A                            | 100 Ω                          |
| Max. Distance | N/A                            | 3 m                            |
| Video Output  |                                |                                |
| Interfaces    | 1 x HDMI Type A Female (Black) | 1 x HDMI Type A Female (Black) |
| Impedance     | 100 Ω                          | 100 Ω                          |
| Max. Distance | 3 m                            | 3 m                            |
| Video         |                                |                                |

|  |  |  |
|--|--|--|
| Max. Data Rate                         | 10.2Gbps (3.4Gbps per lane)  | 10.2Gbps (3.4Gbps per lane)  |
| Max. Pixel Clock                       | 340 MHz  | 340 MHz  |
| Compliance                             | HDMI (3D, Deep Color, 4K)<br>HDCP1.4 Compatible  | HDMI (3D, Deep Color, 4K)<br>HDCP1.4 Compatible  |
| Max. Resolutions / Distance            | Up to 4K@30m (Cat5e), 40m (Cat 6/ATEN 2L-2910); 1080p@35m (Cat5e), 50m (Cat 6/2L-2910)<br><br>*4K supported:<br>4096 x 2160 / 3840 x 2160 @ 30Hz (4:4:4)   | Up to 4K@30m (Cat5e), 40m (Cat 6/ATEN 2L-2910); 1080p@35m (Cat5e), 50m (Cat 6/2L-2910)<br><br>*4K supported:<br>4096 x 2160 / 3840 x 2160 @ 30Hz (4:4:4)   |
| Audio                                  |  |  |
| Input                                  | N/A  | 1 x HDMI Type A Female (Black)   |
| Output                                 | 1 x HDMI Type A Female (Black)   | 1 x HDMI Type A Female (Black)   |
| Control                                |  |  |
| IR Channel                             | 1 x Mini Stereo Jack Female (Black);<br>(NOTE 1)   | 1 x Mini Stereo Jack Female (Black);<br>(NOTE 1)   |
| Connectors                             |  |  |
| Unit To Unit                           | 1 x RJ-45 Female   | 8x RJ-45 Female  |
| Power                                  | 1 x RJ-45 Female<br>(Power over Cable, power supply from VS1828T)  | 1 x DC Jack (Black) with locking   |
| Maintenance                            | N/A  | Micro USB for F/W upgrade  |
| Switches                               |  |  |
| Mode Switch                            | N/A  | EDID Mode Selection  |
| Power                                  | N/A  | Power ON/OFF   |
| Power Consumption                      | 19.2WBTU/h<br><br>Note:<br>● The measurement in Watts indicates the typical power consumption of the device with no external loading.<br>● The measurement in BTU/h indicates the power consumption of the device when it is fully loaded. | 19.2WBTU/h<br><br>Note:<br>● The measurement in Watts indicates the typical power consumption of the device with no external loading.<br>● The measurement in BTU/h indicates the power consumption of the device when it is fully loaded. |
| Environmental                          |  |  |
| Operating Temperature                  | 0 - 40°C   | 0 - 40°C   |
| Storage Temperature                    | -20 - 60°C   | -20 - 60°C   |
| Humidity                               | 20 - 90% RH, Non-Condensing  | 20 - 90% RH, Non-Condensing  |
| Physical Properties                    |  |  |
| Housing                                | Metal  | Metal  |
| Weight                                 | 0.12 kg ( 0.28 lb )  | 0.56 kg ( 1.24 lb )  |
| Dimensions (L x W x H) with bracket    | 7.95 x 6.80 x 1.65 cm<br>(3.13 x 2.68 x 0.65 in.)  | N/A (Housing comes without bracket)  |
| Dimensions (L x W x H) without bracket | 5.75 x 6.80 x 1.65 cm<br>(2.26 x 2.68 x 0.65 in.)  | 29.50 x 8.20 x 1.80 cm<br>(11.61 x 3.23 x 0.71 in.)  |
| Note                                   | NOTE 1: The IR channel of the receiver is a unidirectional bypass channel, transmitting data from receiver to transmitter.<br>NOTE 2: The maximum power consumption assumes that all receivers in the package are installed.               | NOTE 1: The IR channel of the receiver is a unidirectional bypass channel, transmitting data from receiver to transmitter.<br>NOTE 2: The maximum power consumption assumes that all receivers in the package are installed.               |

## Diagram

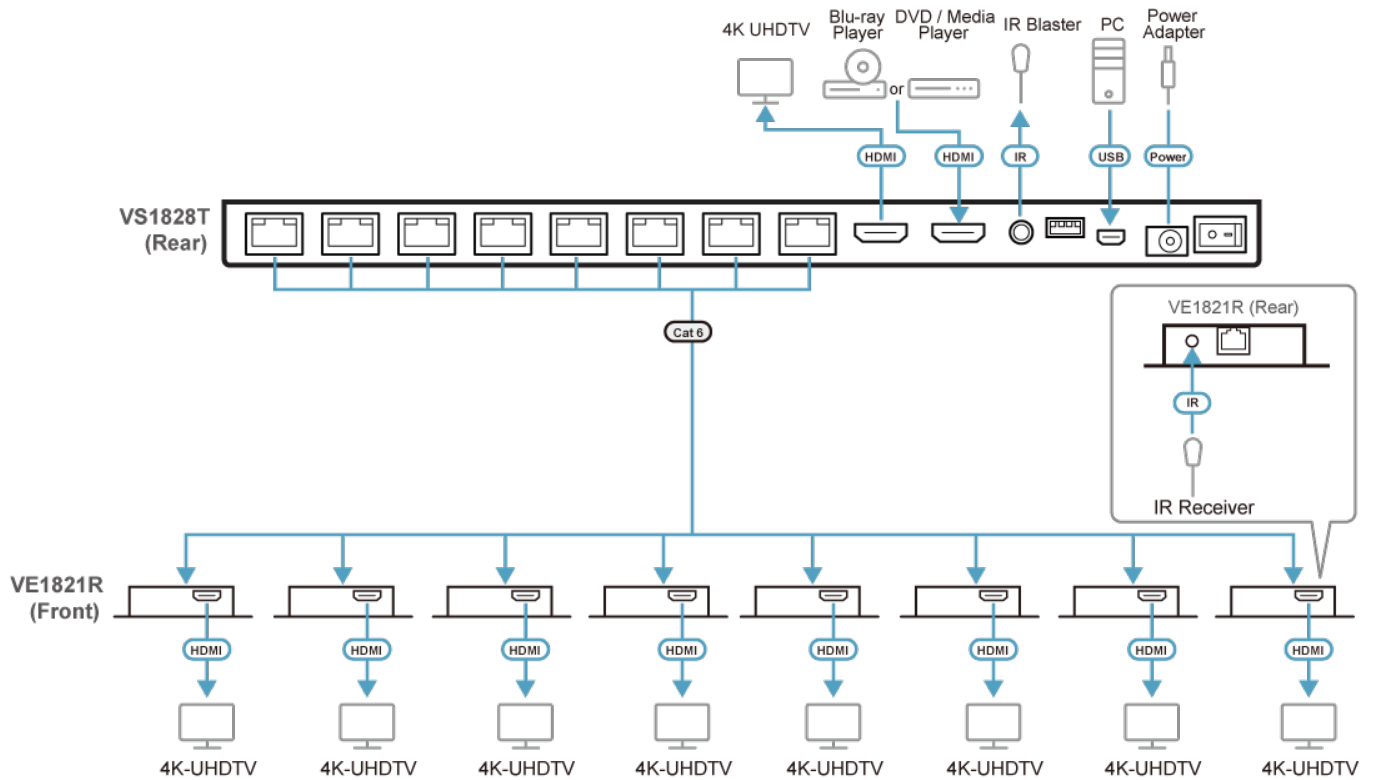

Note: Only connect VS1828T with VE1821R. Connecting VS1828T with other receiver models or third-party receivers may cause physical damage to the receiver.

**ATEN International Co., Ltd.**

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan  
 Phone: 886-2-8692-6789 Fax: 886-2-8692-6767  
 www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.  
 ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.  
 All rights reserved. All other trademarks are the property of their respective owners.