

VS184A

4-Port 4K HDMI Splitter







The VS184A is a 4-Port HDMI video splitter that delivers up to 4K@30 resolution from a single HDMI source to four HDMI displays simultaneously, ensuring reliable content sharing in home entertainment, educational, and commercial setups such as studios, offices, classrooms, retail stores, and more.

One Source. 4-Way Video Distribution

The splitter accepts input from an HDMI device – such as a PC, laptop, media player, and more – and streams the AV content to up to four HDMI-enabled displays, making it suitable for both consumer and professional applications.







Pristine 4K Clarity

The VS184A supports Ultra HD resolutions up to 4K (3840 \times 2160 @ 30Hz, 4:4:4), delivering crystal-clear detail.

Flexible Long-Distance Cabling

The VS184A allows flexible cabling, with connections up to 3 meters (using 2L-7D03H) to an HDMI source and up to 15 meters (using 2L-7D15H) to each HDMI display, delivering data rates of up to 10.2 Gbps.



Applications

The video splitter is ideal for applications that require seamless distribution of pristine audiovisual content across multiple displays, ensuring a stunning viewing experience in any AV setup.


1. 2. 3. 4. 5.





Superstore



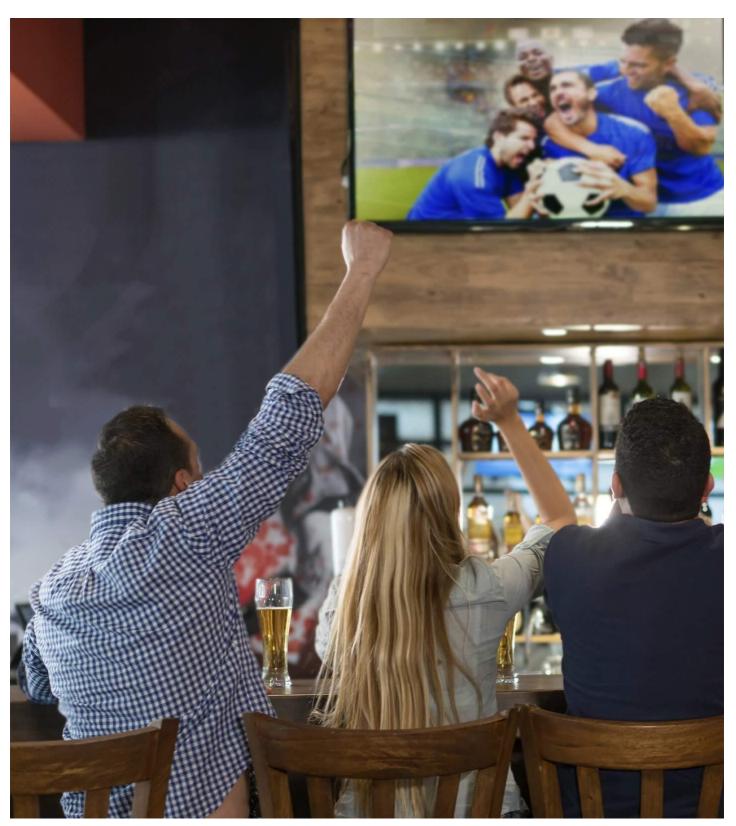


Sports Bar






Station



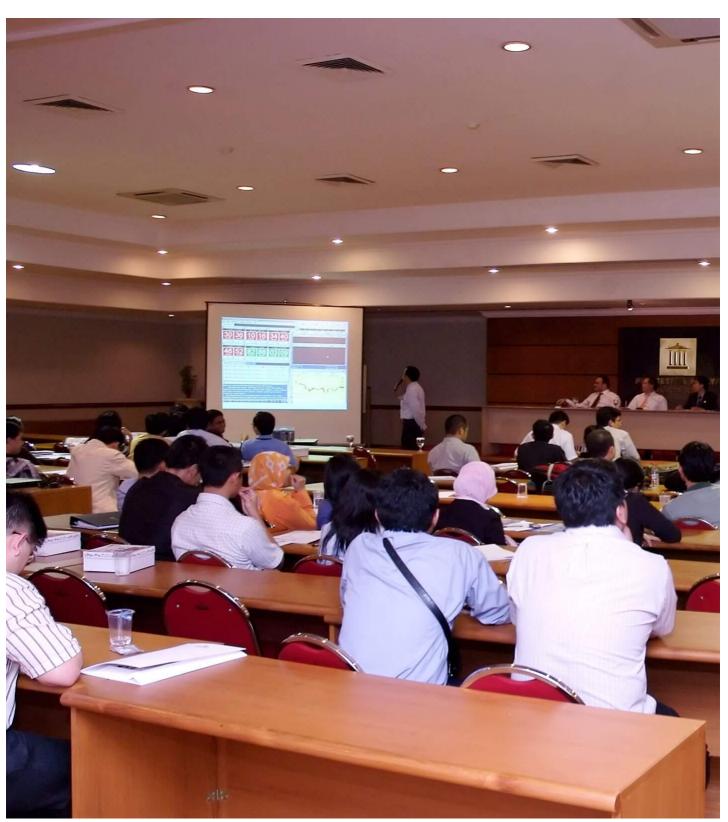

Lecture Hall



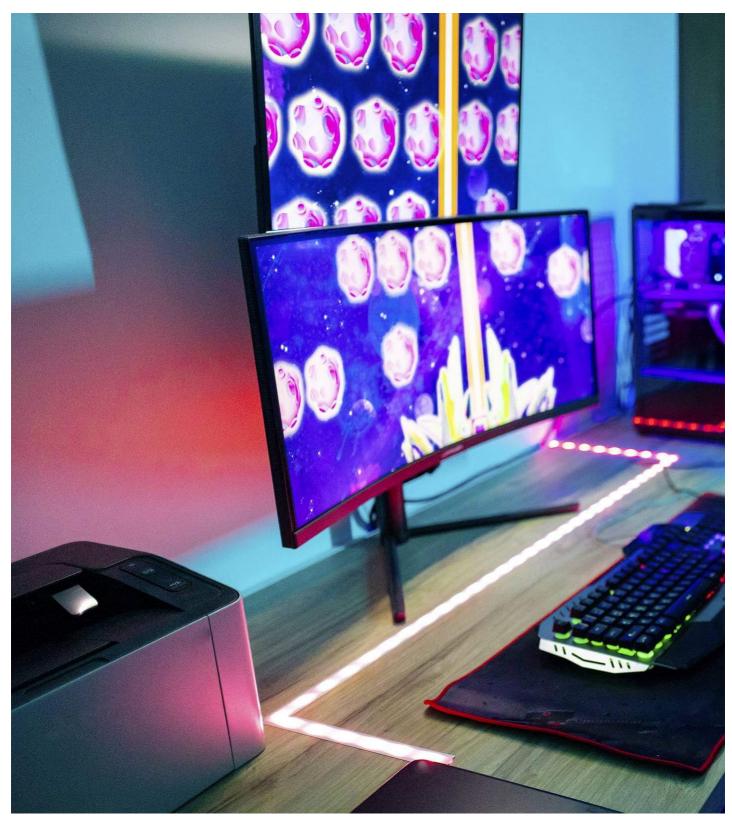


Live Game Streaming

Previous Next

Commitment to Best Quality

Each product is rigorously tested under diverse environmental conditions to ensure high-quality, reliable, and cost-effective performance for our customers.



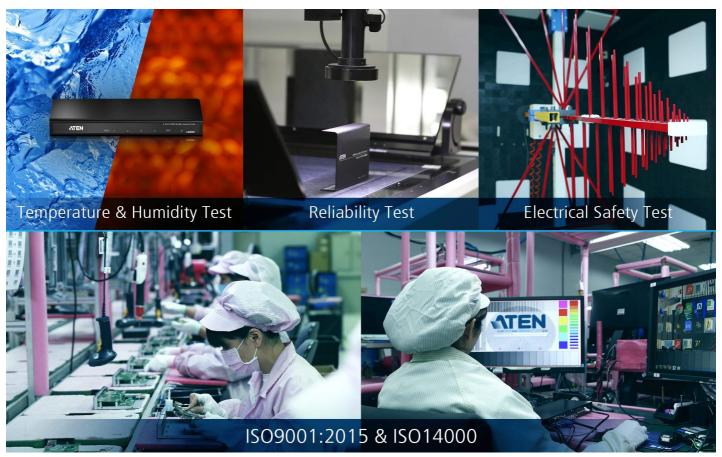

If you prefer to have ATEN contact you, please complete the form and a representative will be in touch with you shortly

First Name *		
Last Name *		
- Country *		V
Company *		
Email *		
Phone Number		
- Customer Type *		_
Job Title *		











10.2Gbps Max. Bandwidth

The VS184A HDMI Splitter is the perfect solution for anyone who needs to send one source of digital high definition video to four displays at the same time. It supports all HDMI-enabled equipment, such as DVD players, satellite set-top boxes and all HDMI displays.

The VS184A HDMI Splitter is HDCP (High Bandwidth Digital Content Protection) compliant, making it effective for use with all HDMI displays in home theater applications, as well as in corporate, educational and commercial settings.

- Connects one HDMI source to four HDMI displays at the same time
 HDMI (3D, Deep Color, 4K); HDCP Compatible
 Supports resolutions of up to Ultra HD 4k × 2k
 Supports Dolby True HD and DTS HD Master Audio
 Long distance transmission up to 15 m (24 AWG)
 Supports max. data rate of 10.2 Gbps
 Plug-and-play no software installation required


Note: Long distance transmission up to 20m (with ATEN 2L-7D20H)

Specifications

Vision Institution 1 x HOM Type A Femile (Black) Impediance 100 D Max. Distance and (9480c2100g309/s (4-44) Vision-Tural Control 4 x HOM Type A Femile (Black) Propriance 4 x HOM Type A Femile (Black) Name Distance 4 x HOM Type A Femile (Black) Name Distance 4 x HOM Type A Femile (Black) Name Distance 100 C Name Distance 102 Copes (A Gop Pe Larie) Name Distance 102 Copes (A Gop Pe Larie) Name Distance 102 Copes (A Gop Pe Larie) Name Proof Code 403 HIS (Black Cope Cope A) Name Proof Code (A) 404 HIS (Black Cope Cope A) Name Proof Code (A) 404 HIS (Black Cope Cope A) Name Proof Code (A) 404 HIS (Black Cope Cope A) Power 1 x HOM Type A Femile (Black) Opport 1 x HOM Type A Femile (Black)	Specifications		
Properties 100 C	Video Input		
Nate Delatrone 3m @3840c2 (50@301c) (44.4) Video Culput Video 15m @3840c2 (50@301c) (4.44) Video 15m @3840c2 (50@301c) (4.45) Video 15m @3840c2 (50m @301c) (4.45) Vide	Interfaces	1 x HDMI Type A Female (Black)	
Video Cutpant	Impedance	100 Ω	
Interfaces	Max. Distance	3m @3840x2160@30Hz (4:4:4)	
Max. Distance 100 0 0 Max. Distance 15m @3840.2160@301t. (4.44) Video	Video Output		
Max. Distance 15m (9340x2160(900tz (4.44)) Voteo Max. Data Rate 10.2 Obps (3.4 Obps Per Lane) Max. Pelo Clock 340 ME. Compliance HDMI (SD, Deep Color, 4K); HOCP Compatible Max. Resolution Up to 4098 x 2160 (3840 x 180 (9 604z (4.2 D)); 4066 x 2160 (3840 x 180 (9 304z (4.4 2.0)); 4066 x 2160 (3840 x 180 (9 304z (4.4 3)) Audio In Exploration In Exploration Output 1 x HDMI Type A Female (Black) Connectors In Exploration In Exploration (Black) Power Consumption DCS 3VB 0.02W28BTUh (Maximum Properties (Black) (Interfaces	4 x HDMI Type A Female (Black)	
Video Max. Data Rate 10.2 Gbps (3.4 Gbps Per Lane) Max. Paral Clock 340 Met. Compliance HDMI (3D, Deep Coor, 4K); HDCP Compatible HDMI (3D, Deep Coor, 4K); Max. Resolution Up to odes x 2160 / 3840 x 2160 @ 60Hz (4.20); Audio Audio Input 1 x HDMI Type A Female (Black) Competions 4 x HDMI Type A Female (Black) Connectors The Power Consumption Power Consumption DC5.3 V 5.02W 28BTUh Note: * The Inseasurement in Wats indicates the typical power consumption of the device with no external loading. * The Inseasurement in BTUh indicates the power consumption of the device with no external loading. * The Inseasurement in BTUh indicates the power consumption of the device with no external loading. * The Inseasurement in BTUh indicates the power consumption of the device with no external loading. * The Inseasurement in BTUh indicates the power consumption of the device with no external loading. * The Inseasurement in BTUh indicates the power consumption of the device with no external loading. * The Inseasurement in BTUh indicates the power consumption of the device with no external loading. * The Inseasurement in BTUh indicates the power consumption of the device with no external loading. * The Inseasurement in BTUh indicates the power consumption of the device with no external loading. * The Inseasurement in BTUh indicates the power consumption of the device with no external loading. * The Inseasurement in BTUh indicates the power consumption of the device with no external loadi	Impedance	100 Ω	
Max. Data Rate 10.2 Gbps (3.4 Gbps Per Lane) Max. Pixel Clock 340 Metz Compliance HEMI (30. Desp Color, 4K); HIDCP Compatible Max. Resolution Up 10 4089 x 2180 / 3840 x 2180	Max. Distance	15m @3840x2160@30Hz (4:4:4)	
Max. Pixel Clock 340 MHz	Video		
Move Resolution Move Resolution Up to 4098 x 2180 / 8940 x 2180 x	Max. Data Rate	10.2 Gbps (3.4 Gbps Per Lane)	
Max. Resolution HDCP Compatible HDCP Compa	Max. Pixel Clock	340 MHz	
Audio Audio Temperature Audio Audio	Compliance	HDMI (3D, Deep Color, 4K); HDCP Compatible	
Input 1 x HDMI Type A Female (Black) Output 4 x HDMI Type A Female (Black) Connectors To Clack Power 1 x DC Jack Power Consumption DC5 3V.6.02W.28BTUh Note:	Max. Resolution	Up to 4096 x 2160 / 3840 x 2160 @ 60Hz (4:2:0); 4096 x 2160 / 3840 x 2160 @ 30Hz (4:4:4)	
Connectors Power 1 x DC Jack Power Consumption DC5.3V:6.02W.28BTUh Note: • The measurement in Watts indicates the typical power consumption of the device with no external loading. • The measurement in BTUh indicates the power consumption of the device when it is fully loaded. Environmental Operating Temperature 0.50 °C Storage Temperature -20 - 60°C Humidity 0 - 80% RH, Non-Condensing Physical Properties Housing Metal Weight 0.47 kg (1.04 lb) Dimensions (L x W x H) 20.00 x 8.00 x 2.50 cm (7.87 x 3.15 x 0.98 in.) Cation Lot 20 pcs	Audio		
Connectors Power 1x DC Jack Power Consumption DC5.3V-6.02W.28BTU/h Note: The measurement in Watts indicates the typical power consumption of the device with no external loading. The measurement in BTU/h indicates the power consumption of the device when it is fully loaded. Environmental Operating Temperature 0.50 °C Storage Temperature 2-20 - 60°C Humidity 0-80% RH, Non-Condensing Physical Properties Housing Metal Weight 0.47 kg (1.04 lb) Dimensions (L x W x H) 20.00 x 8.00 x 2.50 cm (7.87 x 3.15 x 0.98 in.) Carton Lot 20 pcs	Input	1 x HDMI Type A Female (Black)	
Power Consumption DC5.3V-6.02W:28BTU/h Note: The measurement in Watts indicates the typical power consumption of the device with no external loading. The measurement in BTU/h indicates the power consumption of the device when it is fully loaded. Environmental Operating Temperature 0-50 °C Storage Temperature -20 - 60°C Humidity 0 - 80% RH, Non-Condensing Physical Properties Housing Metal Weight 0.47 kg (1.04 lb) Dimensions (L x W x H) 20 00 x 8.00 x 2.50 cm (7.87 x 3.15 x 0.98 in.) Carton Lot 20 pcs	Output	4 x HDMI Type A Female (Black)	
Power Consumption DCS.3V:6.02W:28BTU/h Note: The measurement in Watts indicates the typical power consumption of the device with no external loading. The measurement in BTU/h indicates the power consumption of the device when it is fully loaded. Environmental Operating Temperature 0-50 °C Storage Temperature -20 - 60°C Humidity 0 - 80% RH, Non-Condensing Physical Properties Housing Metal Metal Weight 0.47 kg (1.04 lb) Dimensions (L x W x H) 20 .00 x 8.00 x 2.50 cm (7.87 x 3.15 x 0.98 in.) Carton Lot 20 pcs	Connectors		
Note: The measurement in Watts indicates the typical power consumption of the device with no external loading. The measurement in BTU/h indicates the power consumption of the device when it is fully loaded. Environmental Operating Temperature 0-50 °C Storage Temperature -20 - 60 °C Humidity 0 - 80% RH, Non-Condensing Physical Properties Housing Metal Weight 0.47 kg (1.04 lb) Dimensions (L x W x H) 20.00 x 8.00 x 2.50 cm (7.87 x 3.15 x 0.98 in.) Carton Lot 20 pcs	Power	1 x DC Jack	
• The measurement in Watts indicates the typical power consumption of the device with no external loading. • The measurement in BTU/h indicates the power consumption of the device when it is fully loaded. Environmental Operating Temperature 0-50 °C Storage Temperature -20 - 60°C Humidity 0 - 80% RH, Non-Condensing Physical Properties Housing Metal Metal Weight 0.47 kg (1.04 lb) Dimensions (L x W x H) 20.00 x 8.00 x 2.50 cm (7.87 x 3.15 x 0.98 in.) Carton Lot 20 pcs	Power Consumption	DC5.3V:6.02W:28BTU/h	
Operating Temperature 0-50 °C Storage Temperature -20 - 60°C Humidity 0 - 80% RH, Non-Condensing Physical Properties Housing Metal Weight Weight 0.47 kg (1.04 lb) Dimensions (L x W x H) 20.00 x 8.00 x 2.50 cm (7.87 x 3.15 x 0.98 in.) Carton Lot 20 pcs		The measurement in Watts indicates the typical power consumption of the device with no external loading.	
Storage Temperature -20 · 60°C Humidity 0 · 80% RH, Non-Condensing Physical Properties Housing Metal Weight 0.47 kg (1.04 lb) Dimensions (L x W x H) 20.00 x 8.00 x 2.50 cm (7.87 x 3.15 x 0.98 in.) Carton Lot 20 pcs	Environmental		
Humidity 0 - 80% RH, Non-Condensing Physical Properties Housing Metal Weight 0.47 kg (1.04 lb) Dimensions (L x W x H) 20.00 x 8.00 x 2.50 cm (7.87 x 3.15 x 0.98 in.) Carton Lot 20 pcs	Operating Temperature	0-50 °C	
Physical Properties Housing Metal Weight 0.47 kg (1.04 lb) Dimensions (L x W x H) 20.00 x 8.00 x 2.50 cm (7.87 x 3.15 x 0.98 in.) Carton Lot 20 pcs	Storage Temperature	-20 - 60°C	
Housing Metal Weight 0.47 kg (1.04 lb) Dimensions (L x W x H) 20.00 x 8.00 x 2.50 cm (7.87 x 3.15 x 0.98 in.) Carton Lot 20 pcs	Humidity	0 - 80% RH, Non-Condensing	
Weight 0.47 kg (1.04 lb) Dimensions (L x W x H) 20.00 x 8.00 x 2.50 cm (7.87 x 3.15 x 0.98 in.) Carton Lot 20 pcs	Physical Properties		
Dimensions (L x W x H) 20.00 x 8.00 x 2.50 cm (7.87 x 3.15 x 0.98 in.) Carton Lot 20 pcs	Housing	Metal	
(7.87 x 3.15 x 0.98 in.) Carton Lot 20 pcs	Weight	0.47 kg (1.04 lb)	
	Dimensions (L x W x H)		
Note For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format.	Carton Lot	20 pcs	
	Note	For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format.	



Diagram

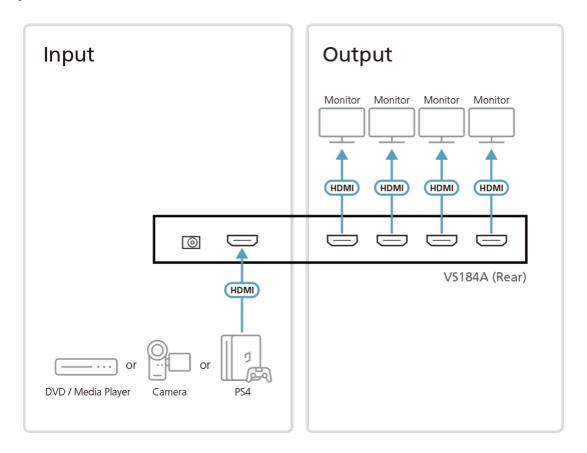

ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan Phone: 886-2-8692-6789 Fax: 886-2-8692-6767

www.aten.com E-mail: marketing@aten.com

