


UC232BF

USB to RJ-45 (RS-232) Console Adapter (FTDI/1.2 m)







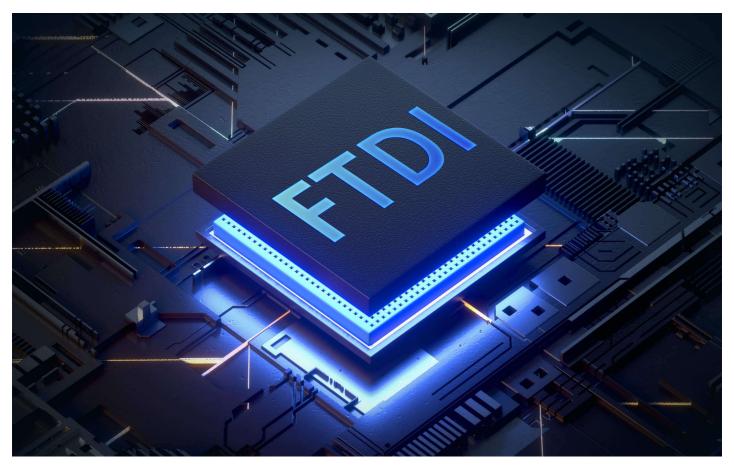

New Upgrade USB-A to RJ-45 (RS-232) Console Adapter

Equipped with the FTDI chipset, the UC232BF features reliable data transmission at a high speed and better device compatibility via plug-n-play connectivity.

Multi-System Support


 $The \ UC232BF \ is \ compatible \ with \ multiple \ operating \ systems, \ such \ as \ macOS, Linux, \ Windows \ 7/8/10, \ and \ legacy \ Windows \ Vista/XP \ versions \ as \ well.$





Compatible with

Windows Vista, XP, 10, 8, 7 / macOS / Linux

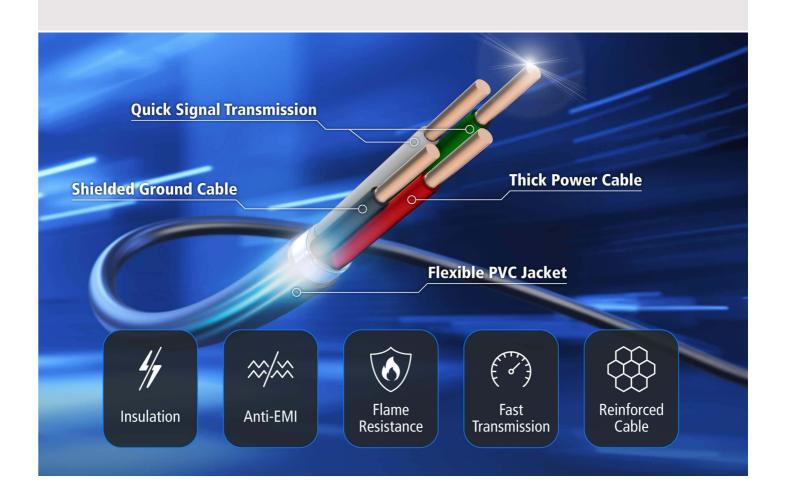




Stable Performance, Fast Transmission


The UC232BF offers USB 2.0 connectivity and is equipped with a robust cable that ensures proven anti-EMI performance for reliable signal transmission at speeds of up to 921.6 Kbps baud rate.

Broadly Compatible with Serial Devices via RJ-45 Connectivity

The UC232BF allows your PC or laptop to control and communicate with various serial devices directly via RJ-45 cable, such as modern, network switch, router, barcode scanner, etc.

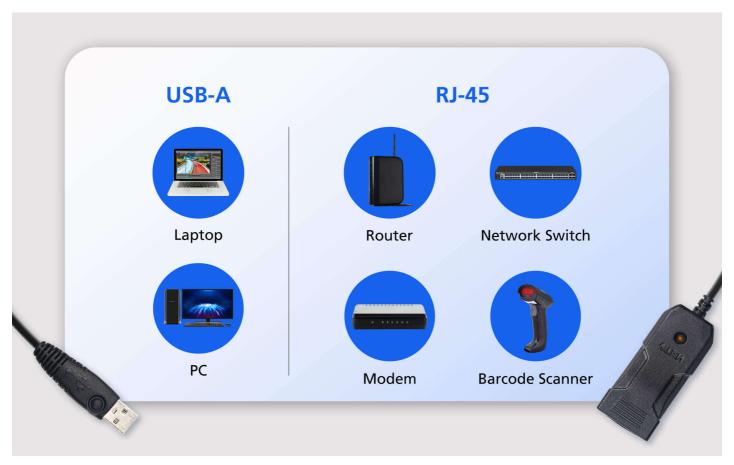




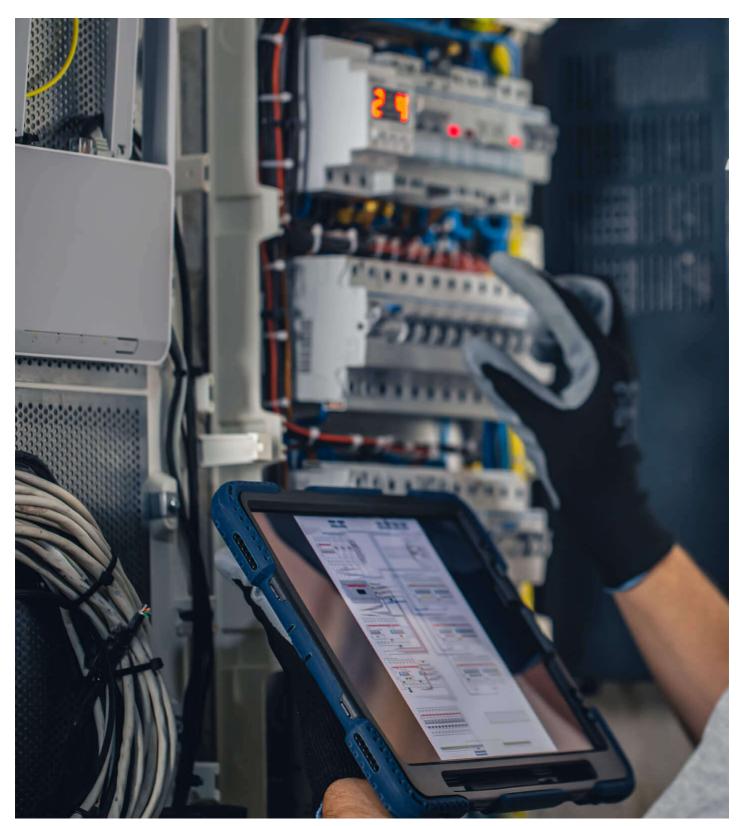

Legacy Equipment Maintenance



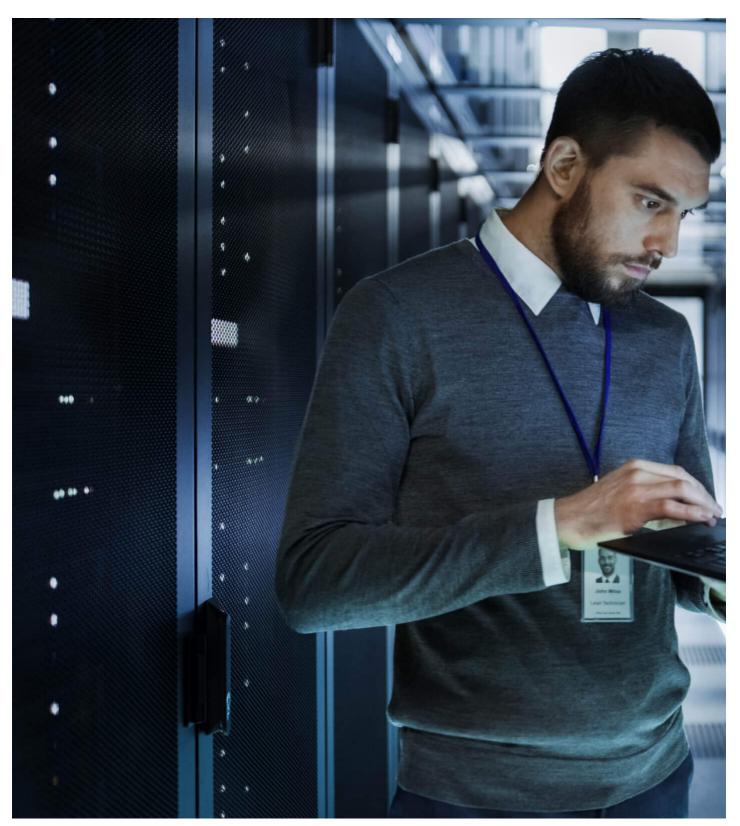

Server Room





Production Line

Previous Next

Product Comparison

 $The \ UC232 \ line up \ is \ well-suited \ for \ a \ variety \ of \ applications \ including \ industrial \ automation, \ IT \ networking, \ and \ control \ systems.$

 ${}^*\text{Notes: Models equipped with FTDI chip provide better signal transmission with legacy Windows OS.}$

Talk to Our Experts

Bus-

Powered



If you prefer to have ATEN contact you, please complete the form and a representative will be in touch with you shortly





The ATEN UC232BF is a one port USB-to-Serial console adapter. This high quality industrial adapter cable is designed to instantly add single RS-232 console port connectivity for networking appliances via a USB port. The adapter is powered via the USB connection.

The UC232BF is compatible with the USB 2.0 standard and works conveniently with desktops and laptops. It also can be used with large integrated computerbased systems or other specialized applications, such as point-of-sale applications, networking equipment, industrial automation systems, and native serial transfer instruments to offer a convenient connectivity solution. The UC232BF converter provides a plug & play solution. Windows, Mac and Linux drivers are included.

- Converts a USB port to RJ-45 Console port (RS-232)
 Adopts FTDI chip for enhanced device compatibility
 Supports straight RJ-45 cables; no need to use Rolled RJ-45 cables for connecting Networking Routers / modems / network switches for configuration
 Fast COM port Transmission up to 921.6 Kbps data transfer rate
 COM retention saves the assigned port settings for the device
 Proven performance in anti-electromagnetic interference (anti-EMI) capability for stable transmission performance


- Plug-and-Play
 No external power supply needed



Specifications

Connectors	
USB Port	1 x USB Type A Male
Serial	1 x RJ-45 Female
Data Rate	Up to 921.6Kbps
Cable Length	1.2m
LEDs	Power Status
Power Mode	Bus Powered
USB Specification	USB compliant
Environmental	
Operating Temperature	0-40°C
Storage Temperature	-20-60°C
Humidity	0–80% RH, Non-condensing
Physical Properties	
Housing	Plastic
Weight	0.06 kg (0.13 lb)
Dimensions (L x W x H)	2.56 x 5.84 x 2.23 cm (1.01 x 2.3 x 0.88 in.)
Note	For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format.

Diagram

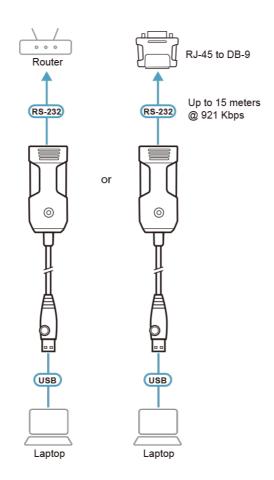

ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan Phone: 886-2-8692-6789 Fax: 886-2-8692-6767

www.aten.com E-mail: marketing@aten.com

