

## VS261

Commutador DVI/Audio de 2 puertos



The 2-port VS261 chart a revolutionary new direction in multimedia functionality by combining a Single Link DVI video switch with stereo quality audio. Now you can easily switch between the digital video and audio output of 2 digital devices (such as DVD players or computers), and enjoy it on a single DVI display and set of speakers. Conveniently switch between DVI input sources using pushbuttons located on the unit's front panel or sit back and use the IR remote control.

The VS261 improves upon previous designs by supporting Single Link DVI (Digital Video Interface), providing superior video quality up to 1920 x 1200. DVI supports both digital video input (flat panel displays, data projectors, plasma displays, digital TVs and set-top boxes) and analog video input (traditional monitors and TVs)



### Características


- Displays the video output of two digital devices (e.g., DVD player, computer) on a single DVI display device
- Fully compliant with DVI-Digital and DVI-Analog
- Audio-enabled
- Quick and easy switching via front panel pushbuttons or IR remote control
- Superior video quality - up to 1920 x 1200
- Función de detección de dispositivos encendidos - en el momento en que una de las fuentes DVI conectadas se apague, el VS261 automáticamente pasará a la siguiente fuente encendida
- Stackable design
- Supports PCs and Macs
- HDCP Compatible

### Especificaciones

Entrada de vídeo	
Interfaces	2 x DVI-I hembra (Blanco)
Impedancia	100 $\Omega$
Distancia máxima	1,8 m
Salida de vídeo	

Interfaces	1 x DVI-I hembra (Blanco)
Impedancia	100 Ω
Distancia máxima	5 m
Vídeo	
Tasa de datos máxima	6,75 Gbps (2,25 Gbps por carril)
Reloj de píxeles máximo	225 MHz
Normativa	Compatible con HDCP
Resolución máxima	Hasta 1920 x 1200
Distancia máxima	Hasta 5 m
Audio	
Entrada	4 x Conector RCA estéreo hembra (Rojo y Blanco)
Salida	2 x Conector RCA estéreo hembra (Rojo y Blanco)
Conectores	
Alimentación	1 x Conector de CC
Consumo de energía	DC5.3V:1.7W:8BTU
Condiciones medioambientales	
Temperatura de funcionamiento	0 - 50°C
Temperatura de almacenamiento	-20 - 60°C
Humedad	HR del 0 - 80% Sin condensación
Propiedades físicas	
Carcasa	Metal
Peso	0.50 kg ( 1.1 lb )
Dimensiones (LA x AN x AL)	14.00 x 8.80 x 5.55 cm (5.51 x 3.46 x 2.19 in.)
Lote de caja de cartón	10 unidades
Nota	Tenga en cuenta que, en algunos productos de montaje en bastidor, las dimensiones físicas estándar de anchura x profundidad x altura se expresan en el formato longitud x anchura x altura.

## Diagrama

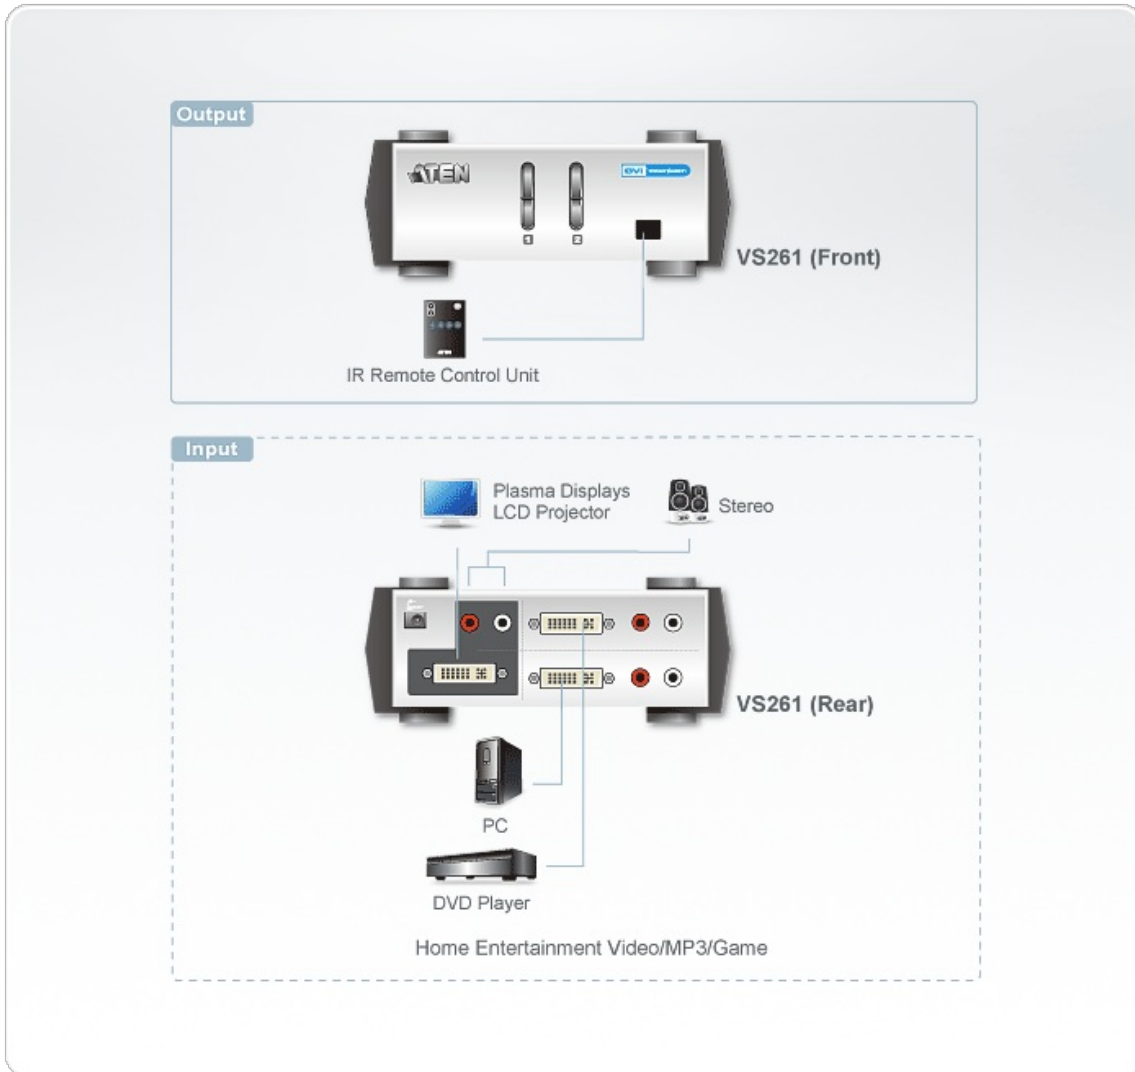

### ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan  
Phone: 886-2-8692-6789 Fax: 886-2-8692-6767  
www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.  
ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.  
All rights reserved. All other trademarks are the property of their respective owners.