


2L-2910

305M HDBaseT SF/UTP CAT 6 Cable

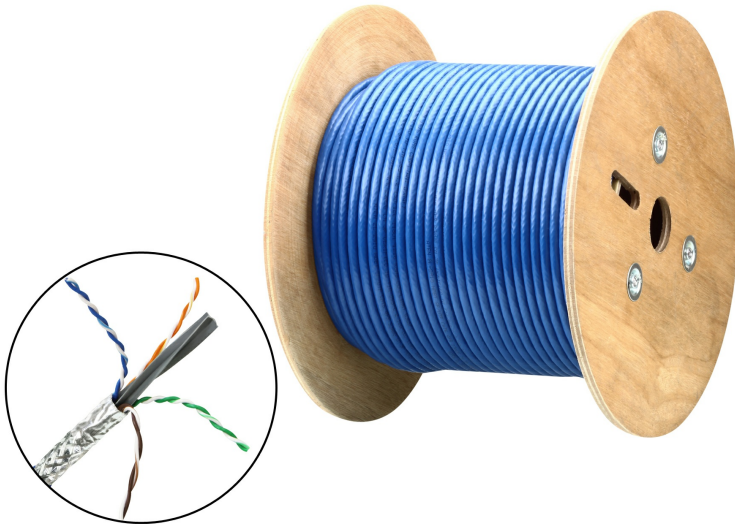

The 2L-2910 is a twisted pair cable engineered for optimum signal transmission at resolutions up to 4K including digital and analogue data, audio, and video applications. The cable supports sweep frequency up to 400 MHz and has been verified to meet performance requirements set by the HDBaseT Alliance.

The 2L-2910 supports long distance connections while safeguarding transmission quality. The outer metal layer and the braid protect signal transmissions from electromagnetic interference and reduce the impact caused by electrical noise.

The 2L-2910 utilizes SF/UTP design with four unshielded 23 AWG twisted pair conductors. Among the four unshielded twisted pair conductors, there is one cross filler to reduce cross talk. Most importantly, the cable meets the requirements set by ANSI/ TIA-568-C.2 (2009) ensuring high performance in electrical transmission.



Features

- Optimized for multiple distributions including HD video, audio, Ethernet, power and control
- Verified to meet performance requirements set by HDBaseT Alliance
- Supports sweep frequency up to 400 MHz
- Supports up to 4K data transmission
- Conductor material: 23 AWG bare copper
- Outer shielded material: Al Mylar tape
- Braid wire: tinned copper
- Flame test UL 1685 (CM rated), RoHS compliant
- Compatible with ATEN HDBaseT extenders and splitters.
- Regulatory:
 - PoE: IEEE 802.3af (PoE)/ IEEE 802. 3at (PoE+)
 - Electrical Transmission: ANSI/TIA-568-C.2 (2009), ISO/IEC 11801 (Edition 2.2), IEC 61156-5 (Edition 2.1)
 - Material and Construction: UL 444, CSA 22.2 NO.214


Specification

Cable Type	Cat 6 SF/UTP
Conductor	

Size	23 AWG
Construction	Solid Bare copper
Number of Pairs	4
Shield	
Material	Al Mylar tape
Coverage	100% Coverage and mylar side facing out
Insulation	
Material	Polyolefin
Color codes	Blue & White/Blue stripe 1.08 ± 0.02 mm Orange & White/Orange stripe 1.05 ± 0.02 mm Green & White/Green stripe 1.08 ± 0.02 mm Brown & White/Brown stripe 1.05 ± 0.02 mm
Filler	Polyolefin (PO)
Braid	Tinned Copper
Jacketed	
Material	Polyvinyl chloride (PVC)
Average Thickness	0.5 mm±0.05mm
Diameter	7.4 ± 0.20 mm
Color	Blue
Electrical	
Dc Resistance Unbalance	≤ 5%
Conductor Resistance	≤ 9.38 Ω/100m
Dielectric strength	1.5 KV ac for 2 s
Insulation resistance	≥ 5000 MΩ·km
Mutual Capacitance	≤ 5.6 nF/100m
Pair-To-Ground Capacitance Unbalance	≤ 330 pF/100m
Ac Leakage Current Through Overall Jacket	≤ 10mA (1.5KV AC)
Spark Test	2.5 KV DC
Minimum bending radius	≥4 times of overall diameter
Delay Skew	45.00 Max.ns/100m
Environmental	

Temperature (Operating / Storage)	-20°C to 60°C
Physical Properties	
Weight	17.57 kg (38.7 lb)
Cable Length	305m / 1000ft
Note	For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format.

Diagram

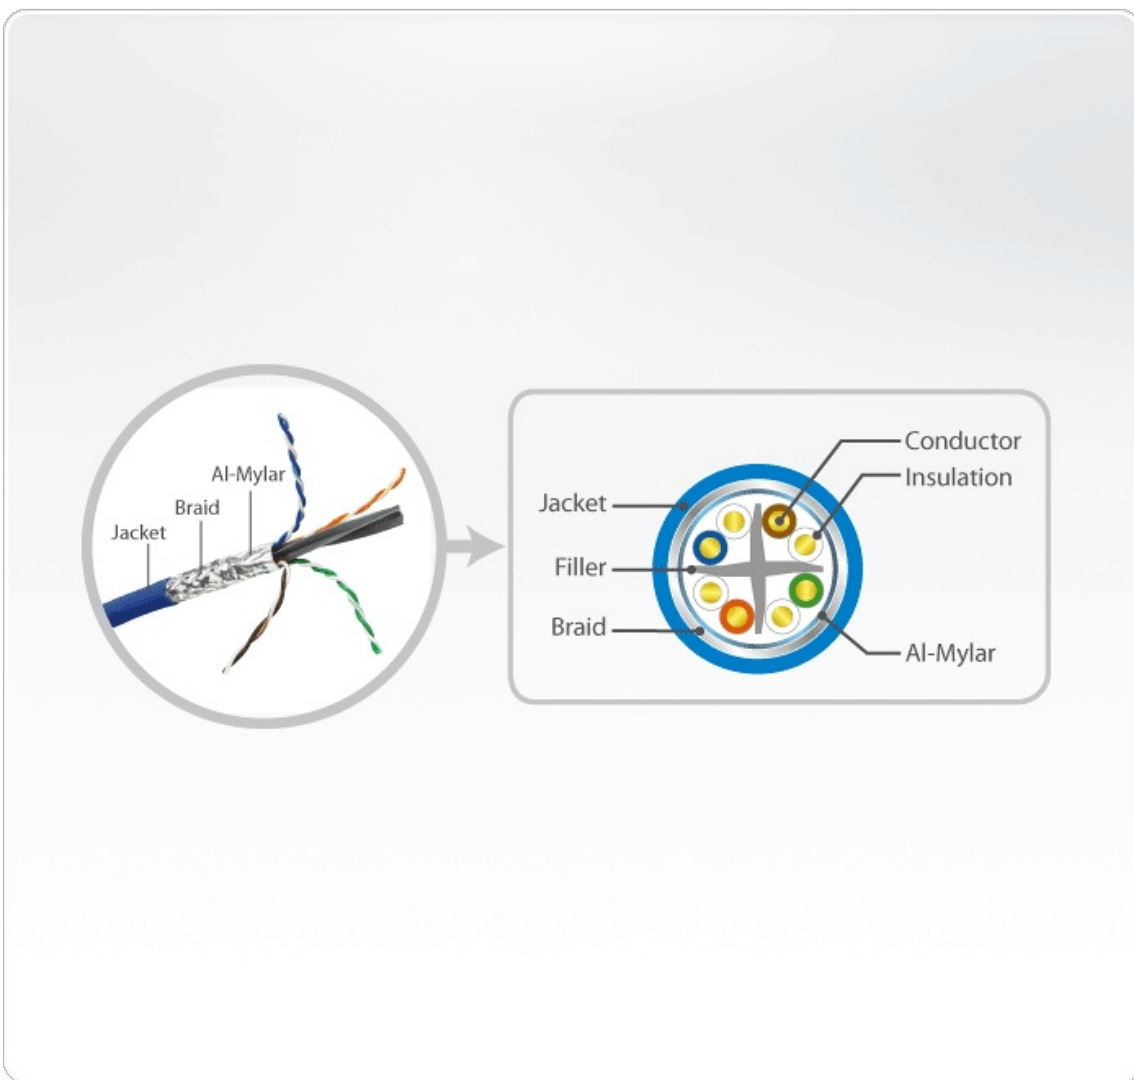

ATEN International Co., Ltd.

3F, No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan
 Phone: 886-2-8692-6789 Fax: 886-2-8692-6767
 www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.
 ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.
 All rights reserved. All other trademarks are the property of their respective owners.