


# **CS52**

2-Port PS/2 USB VGA Cable KVM Switch with Remote Port Selector

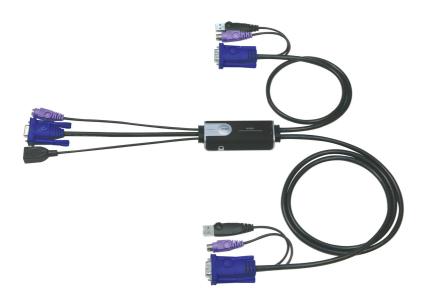

Flexible Combinations : PS/2 Keyboard+USB Mouse

### Features

- One console (monitor, PS/2 keyboard, and USB mouse) controls two computers
- Remote port selection switch for convenient switch placement
- Supports multi-function mice
- USB 2.0 mouse port can be used for USB hub and USB peripheral sharing
- Compact design, built in all-in-one cables (console 0.15m; computers 0.6m, 1.2m)
- Superior video quality- up to 2048 x 1536; DDC2B
- Auto Scan function to monitor computer operation
- Non-powered
- OS Compatibility includes Windows 2000/XP/Vista, Linux and FreeBSD.

### Specification

| Computer<br>Connections | 2   |
|-------------------------|---|
| Port Selection          | Hotkey, Remote Port Selector  |
| Connectors              |   |
| Console Ports           | 1 x HDB-15 Female (Blue)<br>1 x 6-pin Mini-DIN Female (Purple)<br>1 x USB Type A Female   |
| KVM Ports               | 2 x HDB-15 Male (Blue)<br>2 x 6-pin Mini-DIN Male (Purple)<br>2 x USB Type A Male (Black) |
| Remote Port<br>Selector | 1 x 2.5mm Audio Jack Female   |
| LEDs                    |   |
| Selected                | 2 (Green)   |
| Cable Length            |   |



| Console                   | 0.15 m   |
|---------------------------|--|
| Computer                  | 1 x 0.6 m; 1 x 1.2 m   |
| Emulation                 |  |
| Keyboard / Mouse          | PS/2   |
| Video                     | 2048 x 1536; DDC2B   |
| Scan Interval             | 3, 5, 10, 20 seconds (default: 5 secs.)  |
| Power Consumption         | DC5V:0.02W:4BTU/h  |
|                           | Note:<br>• The measurement in Watts indicates the typical power consumption of the device with no external loading.<br>• The measurement in BTU/h indicates the power consumption of the device when it is fully loaded. |
| Environmental             |  |
| Operating<br>Temperature  | 0-50°C   |
| Storage<br>Temperature    | -20-60°C   |
| Humidity                  | 0-80% RH, Non-condensing   |
| Physical Properties       |  |
| Housing                   | Plastic  |
| Weight                    | 0.35 kg(0.77 lb)   |
| Dimensions (L x W x<br>H) | 8.45 x 3.40 x 2.21 cm<br>(3.33 x 1.34 x 0.87 in.)  |
| Note                      | For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format.  |
|                           |  |



#### Diagram



## ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan Phone: 886-2-8692-6789 Fax: 886-2-8692-6767 www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd. ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd. All rights reserved. All other trademarks are the property of their respective owners.