

CS64A

4-Port PS/2 VGA/Audio Cable KVM Switch (1.8m)



CS64A KVM Switch has a handy design integrating with 6 feet of cables and built-in PS/2. It can control 4 servers via a single console.



Features

- One PS/2 console controls four computers
- Compact design, built in 1.8m (6 feet) cables
- All-in-one design
- With speaker support
- Superior video quality- up to 2048 x 1536; DDC2B
- Auto Scan function to monitor computer operation
- Non-powered
- Multiplatform support – Windows, Linux


Specification

4-Port PS/2 KVM Switch

Computer Connections	4
Port Selection	Hotkey
Connectors	
Console Ports	1 x HDB-15 Female (Blue) 1 x 6-pin Mini-DIN Female (Purple) 1 x 6-pin Mini-DIN Female (Green) 1 x 3.5mm Audio Jack Female (Green)
KVM Ports	4 x HDB-15 Male (Blue)

	4 x 6-pin Mini-DIN Male (Purple) 4 x 6-pin Mini-DIN Male (Green) 4 x 3.5mm Audio Jack Male(Green)
LEDs	
Selected	4 x Green
Cable Length	
Computer	4 x 1.8 m
Emulation	
Keyboard / Mouse	PS/2
Video	2048 x 1536; DDC2B
Scan Interval	5 seconds
Power Consumption	DC5V:0.41W:6BTU
Environmental	
Operating Temperature	0-50 °C
Storage Temperature	-20-60 °C
Humidity	0-80% RH, Non-condensing
Physical Properties	
Housing	Plastic
Weight	0.67 kg (1.48 lb)
Dimensions (L x W x H)	7.86 x 7.86 x 3.06 cm (3.09 x 3.09 x 1.2 in.)
Note	For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format.

Diagram

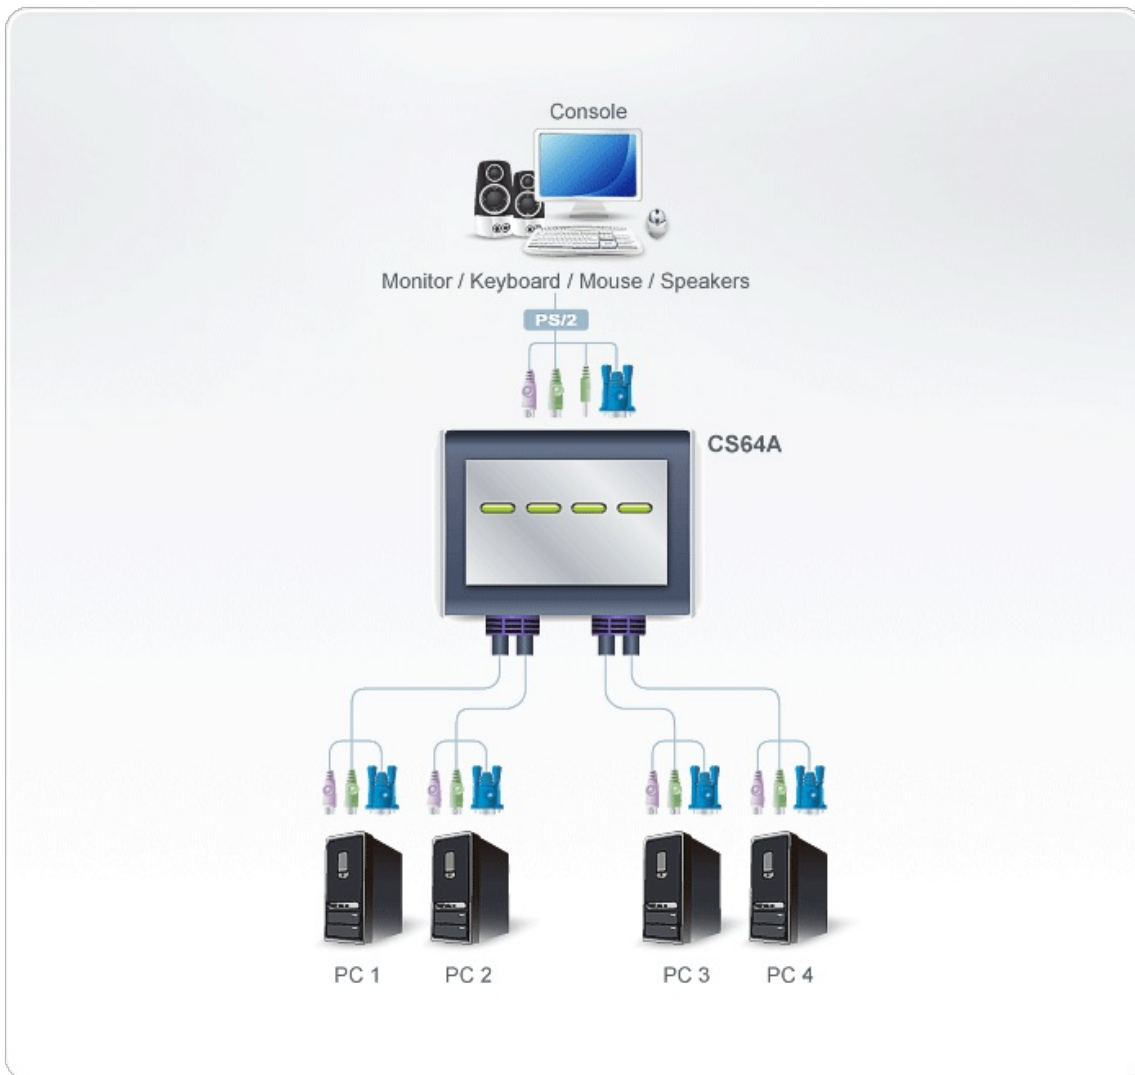

ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan
Phone: 886-2-8692-6789 Fax: 886-2-8692-6767
www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.
ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.
All rights reserved. All other trademarks are the property of their respective owners.