

CS1642A

2-Port USB DVI Dual Link Dual Display/Audio KVMP™ Switch



The CS1642A 2-Port USB DVI Dual View KVMP™ Switch is a multi-application device that integrates a 2-port KVM switch with 2-port USB hub. The newest version now supports Quad-View functionality with two Dual View KVM Switches connected.

bb

The new CS1642A features multi-view capabilities, which allow two switches to be daisy chained for a dual, triple, or quadview display across multi-monitor installations. The CS1642A supports advanced nVidia 3D Vision ready 120Hz 3D displaying, allowing you to manage various 3D visual effects. It allows you to manipulate all connected computers from a single console to save resources and work space. It enables each computer to access connected peripherals on a one-computer-at-a-time basis, making it ideal for users who need delicate visual effects and multi-tasking on several computers. The CS1642A is perfect for graphic designers, banking and financial consultants, gamers and medical professionals-demanding a high quality switch that provides stunning color, clarity and functionality.



Features

- One dual-screen USB console controls two/four dual-screen computers and two additional USB devices
- Multi-View Display Easily connect two CS1642A/1644A's units for a second dual-screen setup controlled through a single connection
- Superior video quality 2560 x 1600 at 60Hz (DVI Dual link); and 3D displays up to 1920 x 1200 at 120Hz (DVI Single link)
- Supports widescreen resolutions
- . Independent switching of KVM, USB, and Audio focus
- . DVI digital and analog monitor support fully compliant with DVI specifications; and HDCP compliant
- Multiplatform support Windows 2000/XP/Vista, Linux *, Mac, Sun, and FreeBSD
- Sun/Mac keyboard support and emulation **
- · Video DynaSync, exclusive ATEN technology, to eliminate boot-up display problems and optimizes resolution when switching between ports
- Power on detection if one computer is powered off, the CS1642A will automatically switch to the next powered-on computer
 - * Supports Linux Kernel 2.6 and higher. The CS1642A has a builtin USB 2.0 hub, so will not support PCs or OS that do not support USB 2.0.
 - ** PC keyboard combinations emulate Mac keyboards.
 - ** Mac keyboards only work with their own computers.

Specification

| Computer Connections | 2 |
|-------------------------|---------------------------|
| Port Selection | Hotkey, Pushbutton, Mouse |




| Connectors | |
|--------------------------|--|
| Console Ports | 2 x USB Type A Female (rear panel) 2 x DVI-I Female (White) 1 x 3.5mm Audio Jack Female (Green) 1 x 3.5mm Audio Jack Female (Pink) |
| KVM Ports | 2 x USB Type B Female 4 x DVI-I Female (white) 2 x 3.5mm Audio Jack Female (Green) 2 x 3.5mm Audio Jack Female (Pink) |
| Daisy Chain Ports | 1 x RJ-45 Female (rear panel) |
| Power | 1 x DC Jack |
| USB Hub | 2 x USB Type A Female (1 x front panel; 1 x rear panel) |
| LEDs | |
| KVM | 2 (Orange) |
| Audio | 2 (Green) |
| USB Link | 2 (Green) |
| Switches | |
| Selected | 3 x Pushbutton |
| Emulation | |
| Keyboard / Mouse | USB |
| Video | DVI Dual Link: 2560 x 1600 @ 60Hz; 3D Display: 1920 x 1200 @ 120Hz |
| Scan Interval | 1-99 seconds (default: 5 secs.) |
| Power Consumption | DC5.3V:3.77W:43BTU/h Note: The measurement in Watts indicates the typical power consumption of the device with no external loading. The measurement in BTU/h indicates the power consumption of the device when it is fully loaded. |
| Environmental | |
| Operating Temperature | 0–50°C |
| Storage Temperature | -20–60°C |
| Humidity | 0-80% RH, Non-condensing |
| Physical Properties | |
| Housing | Plastic, Metal |
| Weight | 0.56 kg (1.23 lb) |
| Dimensions (L x W x H) | 26.23 x 7.68 x 4.40 cm (10.33 x 3.02 x 1.73 in.) |



Note

For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format.

Diagram

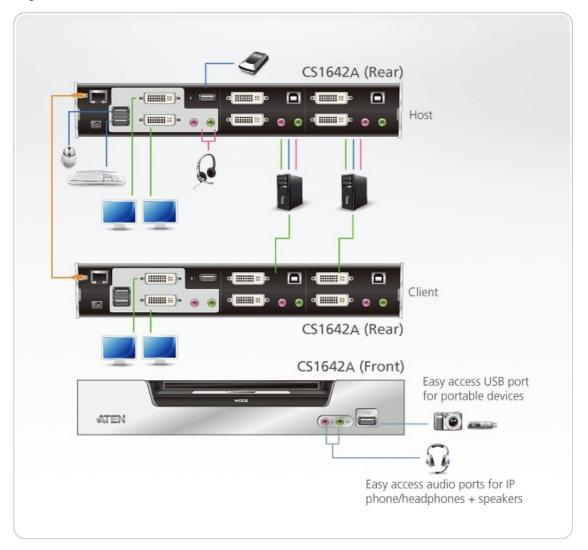

ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan Phone: 886-2-8692-6789 Fax: 886-2-8692-6767

www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.
ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.
All rights reserved. All other trademarks are the property of their
respective owners.