

KE6910ATC

KE6910 Air Traffic Control Bundle Solution



ATEN KE6910 Air Traffic Control Bundle Solution consists of two high performance IP-based transmitters (KE6910T) that connect to two PCs / servers and an IP-based receiver (KE6910R), providing console access from a separate location. The solution builds effortless IP extension that eliminates the distance restrictions of control room management, enabling a faster response to mission-critical data center emergencies. With Primary-Secondary Architecture, the KE6910 Air Traffic Control Bundle Solution enables connection to a primary and a secondary computer that allows instant system failover via hotkey switching without moving around workstations. The deployment of ATEN KE6910 Air Traffic Control Bundle Solution allows access to a computer system from a remote USB console (USB keyboard / mouse and DVI monitor) over the intranet, allowing the computer to be located in a secure and temperature controlled environment, which is also isolated from the user workstation.

KE6910T / KE6910R features one DVI display at each end, providing video resolutions up to 2560 x 2048 @ 50Hz / 2560 x 1600 @ 60Hz as well as flawless and lossless video compression quality with extremely low latency. KE6910T and KE6910R both support connections via an RJ-45 port or a SFP slot. The transmitter KE6910T and receiver KE6910R working as an IP-based extender can be connected either directly to each other or via a high-speed network, over a copper-based or fiber-based LAN, ensuring 24/7 availability of remote access to servers. To connect via the SFP slot, the extender supports 1 Gbps SFP fiber module* expansions, enabling connections via fiber optic network to extend transmission distances up to 10 km.

Other key highlights of the KE6910 Air Traffic Control Bundle Solution include that the solution features the dedicated LAN port for KE direct connections which can be isolated from the corporate network; it also provides secure data transmission – AES 128-bit encryption to secure all data before transmitted over a network and decrypts the data on the receiver. The solution adopts industry standard Transport Layer Security (TLS) protocol. Moreover, the KE6910 Air Traffic Control Bundle Solution features dual power supplies for redundancy, eliminating the need for a power adapter and effectively reducing the power configuration cost. The LAN and power redundancy supports dual power and network connections for system failover, ensuring robust system uptime.

In particular, ATEN KE6910 Air Traffic Control Bundle Solution supports the exceptional 2K x 2K screen resolutions dedicated for radar monitoring in Approach Control Room and Area Control Center specifically in air traffic control scenarios. It allows customizable hotkey settings for instant network port switching without going via CCKM – KVM over IP Matrix Manager, within the network of 2x Tx and 1x Rx deployment. These make the KE6910 Air Traffic Control Bundle Solution perfect for the ATC industry.

Note

The SFP module (<u>2A-136G</u> / <u>2A-137G</u>) is sold separately. Contact your ATEN dealer for product information. For the latest list of compatible network switches, please visit: <u>ATEN Support Center</u> for more information.



Features

Exclusive Features for ATC Industry

- Supports 2K x 2K video resolution (2048 x 2048 @ 60Hz)
- Disconnection Alert pop-up warning message and looping alarm beeping notify users the disconnection status
 Supports power / network failover 2 DC jacks for power redundancy and 1 RJ-45 & 1 SFP fiber port for network failover to ensure constant availability for mission-critical applications

Advanced Features

• Rx access control – users at the Tx local console can enable / disable Rx access by simply pressing a control button* *The KVM over IP Access Control Box (2XRT-0015G) is sold separately. Contact your ATEN dealer for product information.

Hardware

- Supports DVI-D Dual Link video resolutions up to 2560 x 1600 @60Hz and 2560 x 2048 @50Hz
- Supports stereo speakers and stereo microphone
- High speed USB Storage Transmission support
- Auto-MDIX automatically detects cable type
 Built-in 8KV / 15KV ESD protection and 2KV surge protection
- Fanless design for silent operations that are energy efficient
- Supports connection via Gigabit Ethernet port (RJ-45) or 1Gbps SFP fiber module expansions* for failover Supports 1Gbps SFP fiber module* expansions up to 10 km
- Power Redundancy 2 DC Jack for power redundancy
- Rack Mountable Mounting options:
 2X-021G Dual Rack Mount Kit
- 2X-031G Single Rack Mount Kit
- Includes an industrial-grade power adapter supports operating temperature of 0°C-50°C to ensure durability and adaptability under harsh environmental conditions *The SFP module (2A-136G / 2A-137G) is sold separately. Contact your ATEN dealer for product information.

Management

- Dual console operation controls your system from both the transmitter's and receiver's keyboard, monitor, and mouse consoles
- Local console for emergency operation
- OSD (On Screen Display) on the receiver configures both Tx / Rx devices
 EDID Expert™ selects optimum EDID settings to prevent video compatibility issue caused by different monitors
- Video Compression Level allows you to increase/decrease the video quality to adjust for appropriate network bandwidth
- CLI administrators can control all KE devices via RS-232 or Telnet by issuing commands
 RS-232 serial ports allow you to connect to a serial terminal for TextMenu, CLI, or serial devices such as touch screens and barcode scanners

Security

- Dedicated LAN port for KE direct connections can be isolated from the corporate network
 Secure data transmission AES encryption to secure Video / Keyboard / Mouse / Data transmission
- Supports industry standard Transport Layer Security (TLS) protocol

Virtual Media

- · Virtual Media mode enhances data transmission performance, ideally for file transfers, OS patching, software installations and diagnostic testing
- Supports USB 2.0 DVD / CD drives, USB mass storage devices, PC hard drives and ISO images
- Supports Smart Card / CAC Reader

Specification

Function	KE6910R	KE6910T
Connectors		
USB Port	2 x USB Type A Female (White)	N/A
Console Ports	2 x USB Type A Female (White) 1 x DVI-D Female (White) 1 x Mini Stereo Jack (Green) 1 x Mini Stereo Jack (Pink) 1 x DB-9 Male (Black)	2 x USB Type A Female (White) 1 x DVI-D Female (White) 1 x Mini Stereo Jack (Green) 1 x Mini Stereo Jack (Pink) 1 x DB-9 Male (Black)
KVM Ports	N/A	1 x USB Type B Female (White) 1 x DVI-D Female (White) 1 x Mini Stereo Jack (Green) 1 x Mini Stereo Jack (Pink) 1 x DB-9 Female (Black)
Power	2 x DC Jack (Black)	2 x DC Jack (Black)




LAN Ports	1 x RJ-45 (Black) 1 x SFP Slot	1 x RJ-45 (Black) 1 x SFP Slot	
Switches			
OSD	1 x Pushbutton	N/A	
Video	1 x Pushbutton	N/A	
Graphics	1 x Pushbutton	N/A	
Reset	1 x Semi-recessed Pushbutton	1 x Semi-recessed Pushbutton	
Mode Selection	1 x Slide Switch (Extension, RS-232 Config)	1 x Slide Switch (Auto, RS-232 Config/Access Control, Local)	
LEDs			
10/100/1000 Mbps	1 (10: Orange / 100: Orange & Green / 1000: Green)	1 (10: Orange / 100: Orange & Green / 1000: Green)	
Power	1 (Blue)	1 (Blue)	
Local	1 (Green)	1 (Green)	
Remote	1 (Green)	1 (Green)	
Emulation			
Keyboard / Mouse	USB	USB	
Power Consumption	DC5V:9.02W:68BTU/h Note: The measurement in Watts indicates the typical power consumption of the device with no external loading. The measurement in BTU/h indicates the power consumption of the device when it is fully loaded.	DC5V:10.02W:51BTU/h Note: • The measurement in Watts indicates the typical power consumption of the device with no external loading. • The measurement in BTU/h indicates the power consumption of the device when it is fully loaded.	
Video Resolution	2560 x 2048 @ 50 Hz/2048 x 2048 @60Hz/2560 x 1600 @ 60 Hz	2560 x 2048 @ 50 Hz/2048 x 2048 @60Hz/2560 x 1600 @ 60 Hz	
Latency	< 5ms	< 5ms	
Environmental			
Operating Temperature	0-50°C	0-50°C	
Storage Temperature	-20-60°C	-20–60°C	
Humidity	0–95% RH, Non-condensing	0–95% RH, Non-condensing	
Physical Properties			
Housing	Metal	Metal	
Weight	1.26 kg (2.78 lb)	1.13 kg (2.49 lb)	
Dimensions (L x W x H)	22.75 x 17.16 x 5.48 cm (8.96 x 6.76 x 2.16 in.)	21.50 x 16.33 x 4.18 cm (8.46 x 6.43 x 1.65 in.)	
Note	For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format.		



Diagram

Diagram

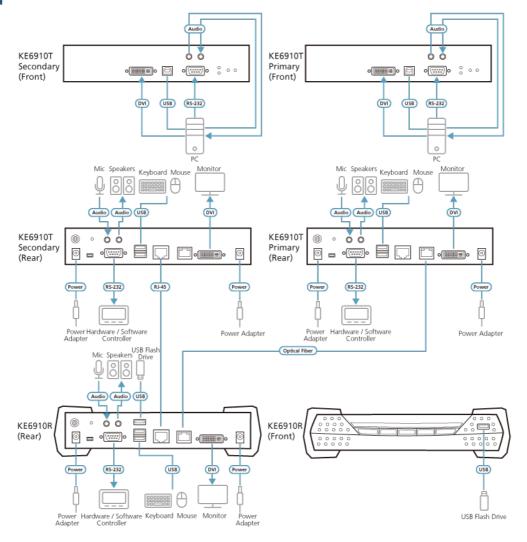

ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan Phone: 886-2-8692-6789 Fax: 886-2-8692-6767





© Copyright 2015 ATEN® International Co., Ltd.
ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.
All inghts reserved. All other trademarks are the property of their respective owners.