

KA9120

PS/2 VGA KVM Adapter with Composite Video Support



The Altusen PS/2 CPU adapters connect KVM cables to the PS/2 console ports of the servers. Those adapters are light and in small form factor, fit perfectly into most of the rack-mount or desktop servers.


Features

- Auto Signal Compensation (ASC), no DIP switch setting needed for the different distances.
- Hot pluggable - add or remove computers without having to power down the switch.
- Lifetime firmware upgrades.
- Superior video quality - supports resolution of up to 1024 x 768; DDC2B.
- Built in ASIC for greater reliability and compatibility.
- CPU module designed with automatic conversion to allow for flexible interface combinations (PS/2, USB) to control all computer types (PC).
- Compact size.

Specification

| | |
|------------------------|---|
| Connectors | |
| Link | 1 x RJ-45 Female |
| Computer | 2 x Min Din 6 Male 1 x HDB-15 Male |
| LEDs | |
| Online | 1 (Green) |
| Link | 1 (Orange) |
| Physical Properties | |
| Housing | Plastic |
| Weight | 0.14 kg (0.31 lb) |
| Dimensions (L x W x H) | 9.00 x 4.30 x 2.18 cm (3.54 x 1.69 x 0.86 in.) |
| Note | For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format. |

Diagram

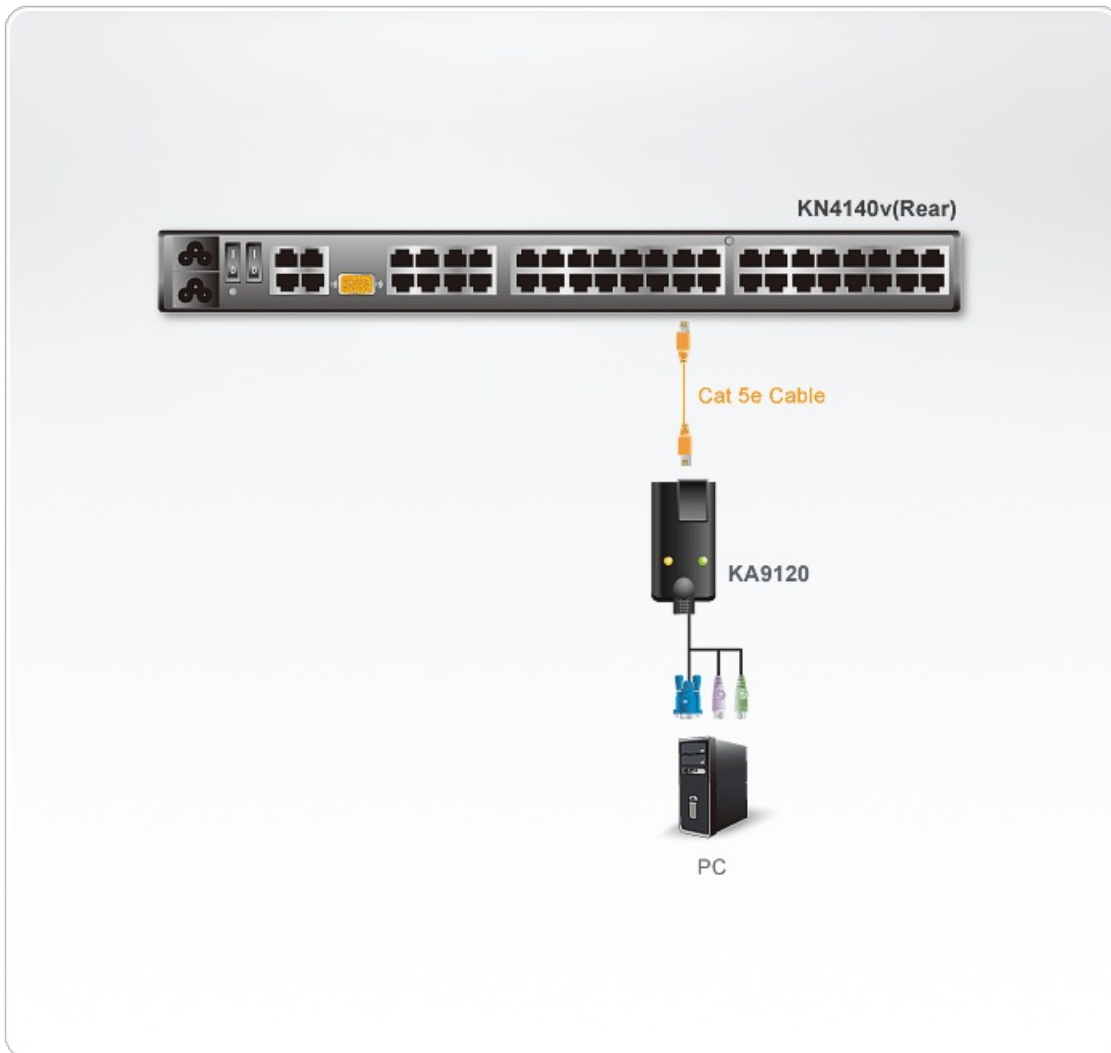

ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan

Phone: 886-2-8692-6789 Fax: 886-2-8692-6767

www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.
 ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.
 All rights reserved. All other trademarks are the property of their
 respective owners.