

## VE150AR

VGA Cat 5 Receiver (1280 x 1024@150m)



The VE150AR video receiver connects to a [VE150AT](#) to extend signals up to 150m from the source using a Cat 5e cable. It is ideal for factories and construction sites, or any location where the display may need to expose in a risky setting, but you want the system to be kept in a safe location.


### Features

- Long distance transmission – up to 150 m
- Adjustable gain control – manually adjust signal strength to compensate for distance
- Superior video quality – up to 1920x1200 (30 m); 1600x1200 (100 m); 1280x1024 (150 m)
- Supports VGA, XGA, SVGA, UXGA, WUXGA, and multisync monitors
- Supports wide screen formats
- Supports hot-plugging
- Built-in 8KV/15KV ESD protection
- Easy installation
- Rack Mountable
- Plug-and-play – no software installation required

## Specification

Video Output	
Interfaces	1 x HDB-15 Female (Blue)
Impedance	75 $\Omega$
Video	
Max. Bandwidth	300 MHz
Max. Resolutions / Distance	Up to 1920 x 1200@30m; 1280 x 1024@150m
Connectors	
Power	1 x DC Jack
Power Consumption	5.3 VDC, 1.2W  Note: <ul style="list-style-type: none"> <li>• The measurement in Watts indicates the typical power consumption of the device with no external loading.</li> <li>• The measurement in BTU/h indicates the power consumption of the device when it is fully loaded.</li> </ul>
Environmental	
Operating Temperature	0 - 50°C
Storage Temperature	-20 - 60°C
Humidity	0 - 80% RH, Non-Condensing
Physical Properties	
Housing	Metal
Weight	0.24 kg ( 0.53 lb )
Dimensions (L x W x H)	12.77 x 9.04 x 2.26 cm (5.03 x 3.56 x 0.89 in.)
Carton Lot	5 pcs
Note	For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format.

# Diagram

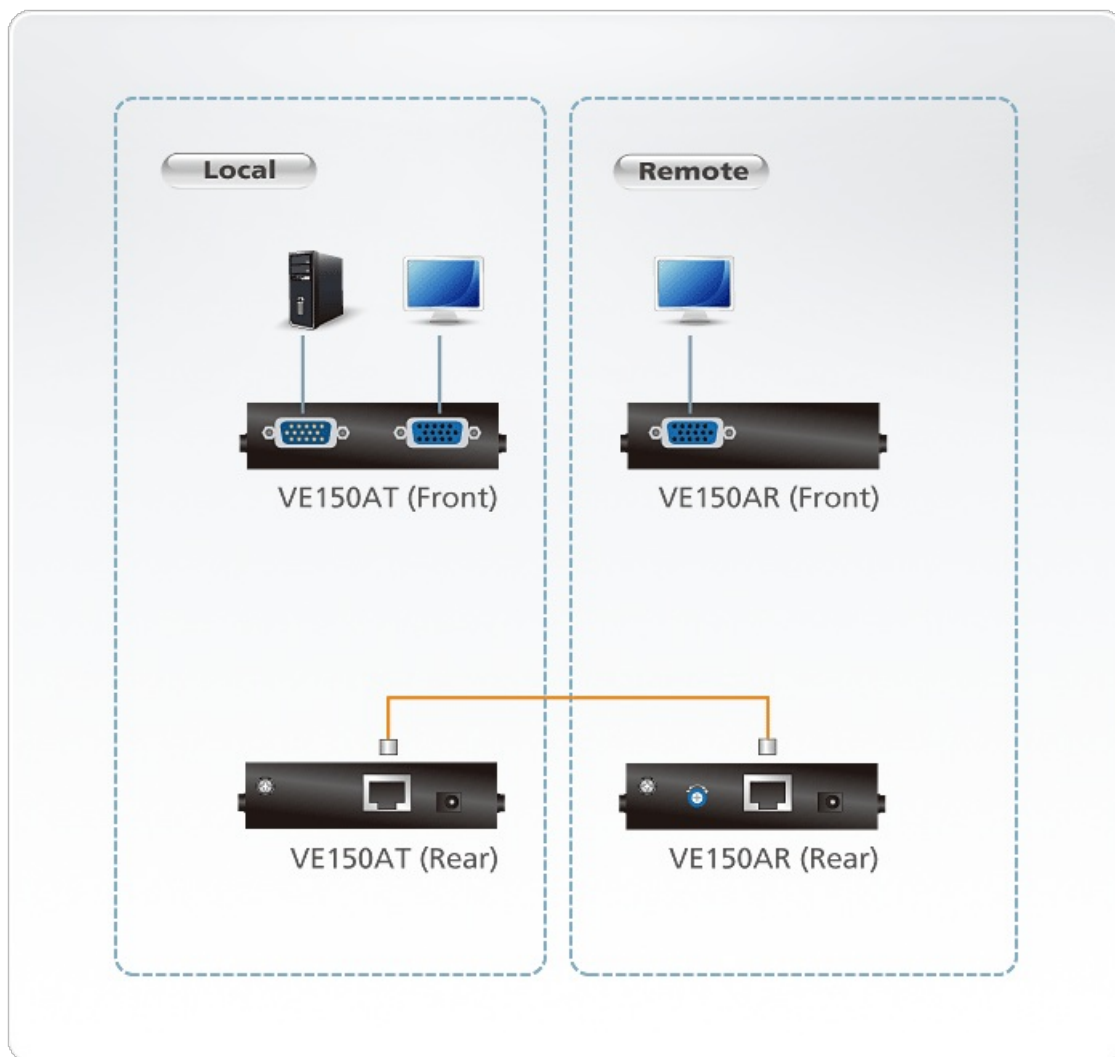

## ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan

Phone: 886-2-8692-6789 Fax: 886-2-8692-6767

www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.  
 ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.  
 All rights reserved. All other trademarks are the property of their  
 respective owners.