

VE1843

True 4K HDMI / USB HDBaseT 3.0 Transceiver







As ATEN's first video transceiver, the VE1843 features the latest HDBaseT 3.0 technology, allowing users to easily configure the unit to be a transmitter or receiver depending on the AV solution they need, while enabling uncompressed True 4K HDMI transmission up to 100m/328ft with zero latency via just one Cat 6A U/FTP cable. With its user-oriented hardware design and enhanced durability, this new model is purpose-built for spaces that require long-distance, yet high-quality, signal transmission with easy installation and non-stop operation, such as conference rooms, auditoriums. banquet halls, and museums.

* Cat 6A U/FTP is the recommended setting. The skewless nature and inter-pair shielding of FTP provides the better near-end crosstalk (NEXT, source end) and far-end crosstalk (FEXT, receiver end) parameters required to achieve the maximum performance and distance.







100m









Uncompressed True 4K

HDBaseT 3.0

Up to 100m Transmission over a Cat 6A U/FTP

Multiple Control Signals (AV, RS-232, IR, USB, Ethernet)

Audio Embedding & De-embedding

Improved Heat Dissipation

Easy Installation



One Unit, Two Configurations

VE1843 integrates the functions of a transmitter and a receiver into one unit for users to easily set it to the direction (Tx / Rx) required and enjoy more flexible deployment with video matrix switches, splitters, and more.

Uncompressed True 4K HDMI with HDR @100m

Delivering uncompressed True 4K @ 60Hz 4:4:4 HDMI with HDR up to 100m/328ft over a Cat 6A U/FTP cable with no latency, VE1843 offers superior video quality even when output devices are located far away.






One Cable to Transmit It All

Streamline complex installation and enjoy multi-signal control by using a Cat 6A U/FTP cable to extend signals including high-quality video, audio, IR, RS-232, Gigabit Ethernet, and USB 2.0 for remotely located equipment management.




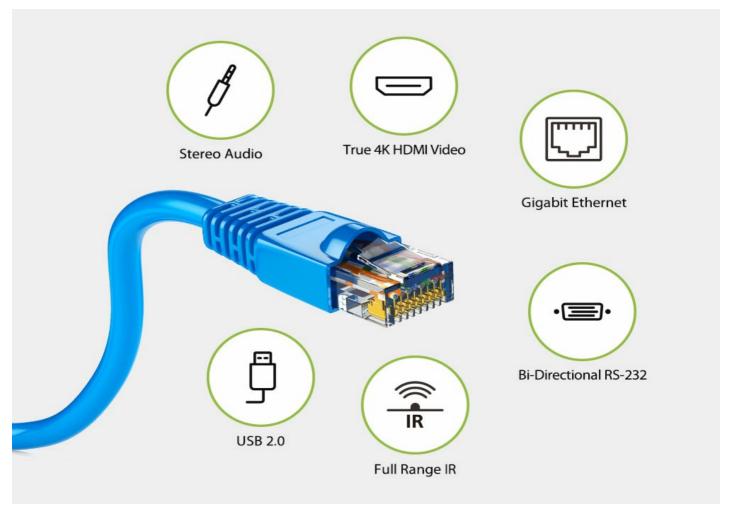


HDMI Audio Embedding & De-embedding

VE1843 comes with HDMI audio embedding / de-embedding functions, enabling users to easily embed a separate audio source to video content for applications such as training and education, or de-embed an audio signal from HDMI input source and output to an amplifier or speaker for enhanced sound quality.



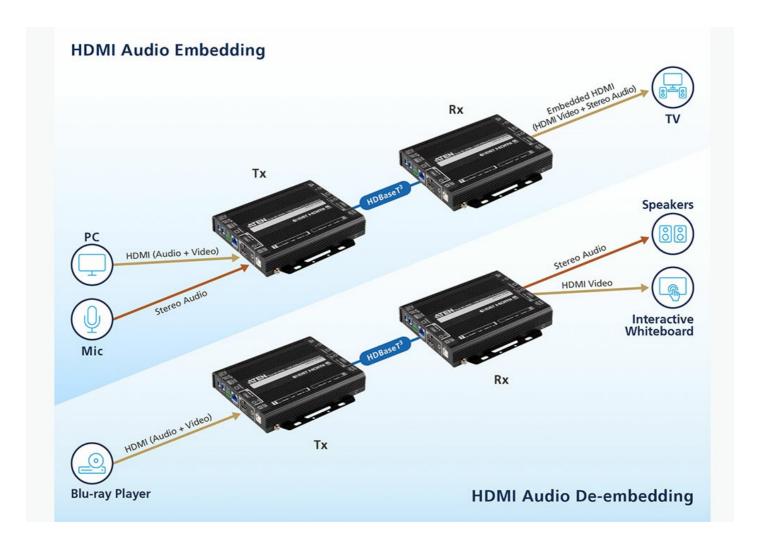



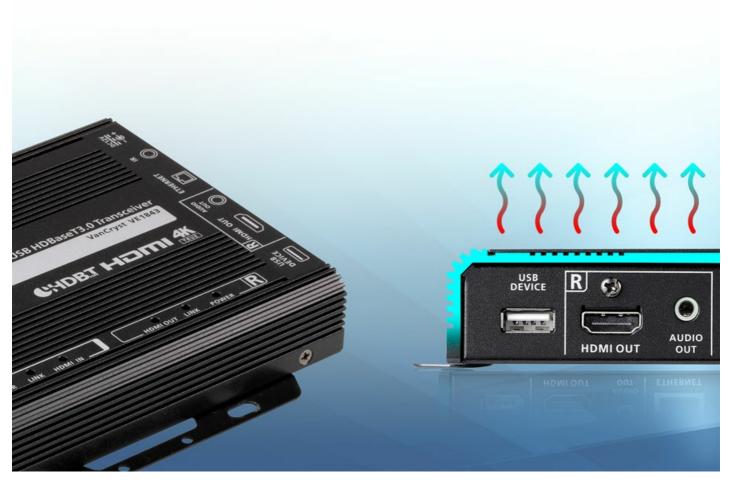


Tailored Fanless Fin Heat Sink Enclosure

VE1843 prevents overheating and fan malfunctions, which will shut down operation, ensuring efficient thermal dissipation and non-stop signal transmission, while improving durability.

User-Focused Design in Every Detail

The design of VE1843 elevates its ease-of-use, including the self-explanatory labeling for intuitive port recognition, the built-in brackets for easy mounting, the LED lights for quick diagnosis, and a dedicated space on the front for writing labels to help device recognition / management.



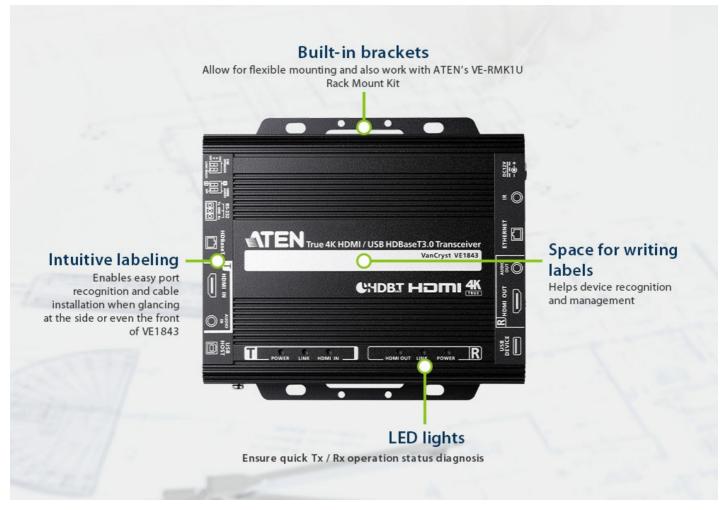

Applications

VE1843 is ideal for small / mid-sized video presentation in conference rooms, public areas, and other applications where high-quality signal transmission across up to 100m/328ft is needed.





Product Comparison









Features

The VE1843 is ATEN's first video transceiver and integrates the functions of a transmitter and a receiver into one unit. This combination allows users to easily configure the unit to be a transmitter or receiver depending on their AV solution, and to enjoy more flexible deployment and effective use with video matrix switches, video splitters, etc.

Designed with HDBaseT 3.0 technology, the VE1843 not only extends True 4K uncompressed signals up to 100 m over a single Cat 6a cable (HDBaseT 3.0 Certified Cat 6a U/FTP cable* / ATEN 2L-2920 Cat 6a cable) with zero latency, but also transmits IR, RS-232, Ethernet, independent audio, and USB signals with the latest HDBaseT standards. For stable HDMI signal transmission, the VE1843 ensures high-quality visuals and reliable extension by supporting HDCP 2.3, 3D, Deep Color, HDR, HDR 10+, and Dolby Vision. In addition, the VE1843 is equipped with HDMI audio embedding / de-embedding functions, enabling users to flexibly adapt suitable audio / video combinations based on different environments. To ensure non-stop operations, the fanless fin heat sink design prevents overheating and thus elevates its reliability.

Empowered by the above benefits, the VE1843 increases the potential of AV applications while also streamlining complex installations. This makes the VE1843 an ideal solution for conference halls, auditoriums, lecture halls, museums, exhibition rooms, and anywhere else that requires high-quality transmission and easy-to-use application.

- Extends uncompressed True 4K HDMI signals up to 100 m over a single Cat 6a cable (HDBaseT 3.0 Certified Cat 6a U/ FTP cable* / ATEN 2L-2920 Cat 6a cable) with zero latency
- Flexible for deployment can be configured as a transmitter or receiver depending on the AV solution
- Compliant with HDBaseT 3.0 standards transmits high-quality video, full range IR, bi-directional RS-232, Gigabit Ethernet, independent stereo audio and USB 2.0 signals channel bypass HDMI (3D, Deep Color, 4K/60Hz); HDCP 2.3 compliant
- Superior video quality up to 4096 x 2160 @ 60 Hz (4:4:4); HDR, HDR 10+, Dolby Vision supported
- Supports HDMI audio embedding / de-embedding functions
- Supports HDMI local output
- Compliant with the USB 2.0 standard for a wide range of USB peripherals compatibility
- LED indication of HDBaseT and HDMI signal status for easier recognition
- Fanless fin heat sink enclosure elevates durability and reliability by preventing overheating, fan malfunctions, and noises Supports extremely high refresh rates up to 240 Hz for the connected display
- Firmware upgradable
- Built-in 8KV / 15KV ESD protection
- Plug-and-play
- Rack-mountable

^{*} Cat 6a U/FTP is the recommended setting. The skewless nature and inter-pair shielding of FTP provides the better near-end crosstalk (NEXT, source end) and far-end crosstalk (FEXT, receiver end) parameters required to achieve the maximum performance and distance.




Video Input		
Interfaces 1 x HDMI Type A Female (Black)		
Impedance	100 Ω	
Max. Distance	5 m	
Video Output		
Interfaces	1 x HDMI Type A Female (Black)	
Impedance	100 Ω	
Max. Distance	5 m	
Video		
Max. Data Rate	18Gbps (6Gbps per lane)	
Max. Pixel Clock	600 MHz	
Compliance	HDMI (3D, Deep Color, 4K/60Hz); 4K HDR HDCP2.2/2.3 Compatible Consumer Electronics Control (CEC)* *The CEC signals are only bypassed from the transmitter unit to the receiver unit and do not support local output.	
Max. Resolution	4096 x 2160 @ 60Hz (4:4:4) 3840 x 2160 @ 60Hz (4:4:4)	
Max. Resolutions / Distance	Up to 4K x 2K @ 60Hz (4:4:4) @100m (HDBaseT3 Certified Cat 6a U/FTP cable / ATEN's tailor-made HDBaseT cable) Up to 1080P@150m @Long reach mode (Cat 6/ 6a or above cable)	
Audio		
Input	1 x HDMl Type A Female (Black) 1 x Stereo Audio (mini stereo Jack female , Green)	
Output	1 x HDMl Type A Female (Black) 1 x Stereo Audio (mini stereo Jack female , Green)	
Connectors		
Unit To Unit	1 x RJ-45 Female	
Power	1 x DC Jack (Black) with locking	
Control		
RS-232 Channel	Connector: 1 x Terminal Block, 3 pole Baud Rate: 19200, Data Bits:8, Stop Bits:1, no parity and flow control	
IR Channel	1 x Mini Stereo Jack Female, (Bi-directional, Black) 30K ~56KHz full range transmission	
Ethernet Channel	1 x GbE (RJ45 Female)	
USB Channel	1 x USB2.0 Type B Female (White, Host) 1 x USB2.0 Type A Female (White, Device) Transmission data bandwidth: Up to 300Mbps	
Power Consumption	DC12V:6.45W:40BTU/h	
	Note: The measurement in Watts indicates the typical power consumption of the device with no external loading. The measurement in BTU/h indicates the power consumption of the device when it is fully loaded.	
Switches		
Selection	1 x Slide Switch - TX (Be a Transmitter) / RX (Be a Receiver) selection	
Mode Selection	1 x Slide Switch - HDMI Audio embed or De-embed ON/OFF selection	
Firmware Upgrade	1 x Slide Switch - ON/OFF	
Long Reach Mode Switch	1 x Slide Switch - ON/OFF	
LEDs		



Power	1 x TX (Transmitter, Green) 1 x RX (Receiver ,Green) NOTE: The TX or RX LED lights to indicate which role the VE1843 is set to.
Link	1 x TX (Transmitter, Orange) 1 x RX (Receiver, Orange)
Video Output	1 x RX HDMI OUT (Receiver, Orange)
Video Input	1 x Tx HDMI IN (Transmitter, Orange)
Environmental	
Operating Temperature	0 - 40°C
Storage Temperature	-20 - 60°C
Humidity	0 - 80% RH, Non-Condensing
Physical Properties	
Housing	Metal
Weight	0.64 kg (1.41 lb)
Dimensions (L x W x H)	17.15 x 15.09 x 3.00 cm (6.75 x 5.94 x 1.18 in.)
Note	For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format.

Diagram

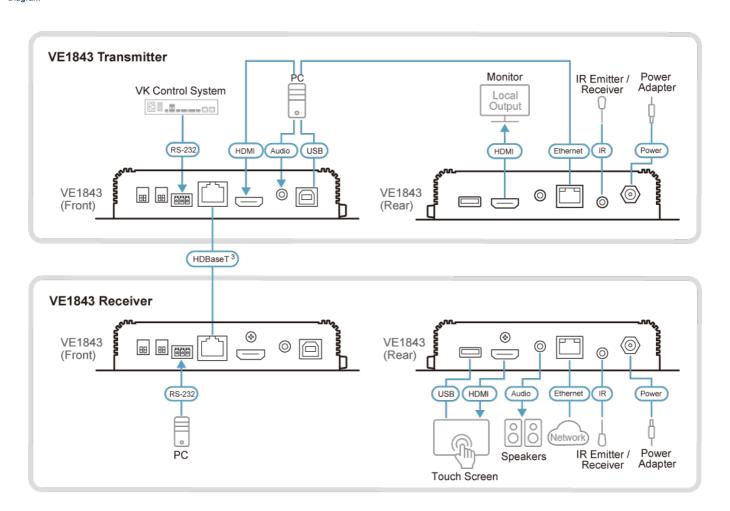



ATEN International Co., Ltd.3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan Phone: 886-2-8692-6789 Fax: 886-2-8692-6767 www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.
ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.
All rights reserved. All other trademarks are the property of their respective owners.