

### VS92DP

2-Port True 4K DisplayPort MST Hub



Designed with a cost effective, yet advanced DisplayPort MST solution in mind, the ATEN VS92DP 2-Port True 4K DisplayPort MST Hub allows the high-defi nition video to be transmitted to two different locations without losing quality. Productivity is enhanced with its feature that permits up to two displays to be connected to a Windows-based laptop / PC. Meanwhile, users can mirror the same image onto two displays or display independent content to each display for multitasking.

The VS92DP supports up to 4K@60Hz (4:4:4) video resolution, HDR Dolby TrueHD and DTS-HD Master Audio 7.1, ensuring distortionless and superb video / audio quality. It is ideal for home theater systems, commercial settings, educational centers, conference rooms, or any scenarios where high video quality is needed.





#### Features

- Distributes one True 4K source to two DisplayPort displays at the same time
   Allows for Single Stream Transport (SST) or Multi-Stream Transport (MST) Mode
- Supports 4K resolution for dual output up to 3840 x 2160@30Hz (4:4:4) DisplayPort 1.2; HDCP 1.3 compliant Provides Dolby TrueHD and DTS-HD Master 7.1 Audio channel

- · High quality and durable aluminum enclosure




# Specification

| LEDs                   |   |
|------------------------|---|
| Status                 | DisplayPort Output x 2 (Blue) Power Input x 1 (Blue)  |
| Video Input            |   |
| Interfaces             | 1 x DisplayPort Male (Black)  |
| Max. Distance          | 15cm  |
| Video Output           |   |
| Interfaces             | 2 x DisplayPort Female (Black)  |
| Max. Distance          | Max 3m at 3840x2160@60Hz (4:4:4) - Single output Max 3m at 3840x2160@30Hz (4:4:4) - Dual output (MST/SST mode)                  |
| Video                  |   |
| Max. Data Rate         | 21.6Gbps (5.4Gbps per lane)   |
| Compliance             | DisplayPort 1.2 / HDCP 1.3  |
| Max. Resolution        | Up to 3840x2160@60Hz (4:4:4, 8 bits)  |
| Power Consumption      | 2WATT(MAX)BTU   |
| Connectors             |   |
| USB Port               | USB Type Micro B x 1 (Firmware upgrade & power source)  |
| Environmental          |   |
| Operating Temperature  | 0-40 °C   |
| Storage Temperature    | -20 - 60 °C   |
| Humidity               | 0 - 80% RH, Non-Condensing  |
| Physical Properties    |   |
| Housing                | Metal (aluminum)  |
| Weight                 | 0.09 kg ( 0.2 lb )  |
| Dimensions (L x W x H) | 8.80 x 6.00 x 15.00 cm<br>(3.46 x 2.36 x 5.91 in.)  |
| Carton Lot             | 10 pcs  |
| Note                   | For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format. |



# Diagram

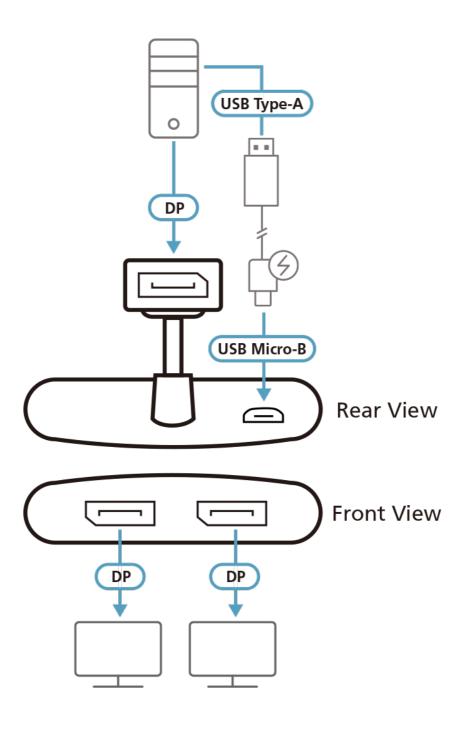

**ATEN International Co., Ltd.**3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan Phone: 886-2-8692-6789 Fax: 886-2-8692-6767 www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.
ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.
All rights reserved. All other trademarks are the property of their
respective owners.