

**UC232A1**

USB to RS-232 Adapter (1 m)



## USB-A to Serial Adapter

**USB-A to RS-232 Adapter 1m****UC232A1**


USB-A



RS-232



Anti-EMI

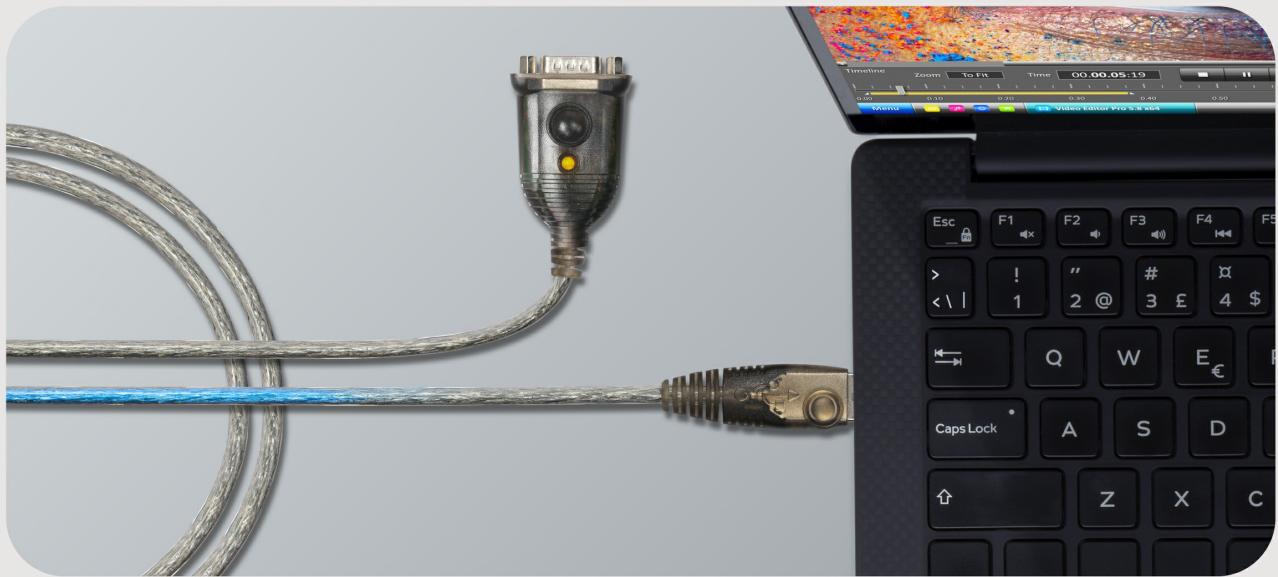


Compatible with  
**Windows 10, 8, 7 / macOS / Linux**

**Multi-System Support**

The UC232A1 is compatible with multiple operating systems, such as macOS, Linux, and Windows 7/8/10.

**Stable Performance, Fast Transmission**

The UC232A1 offers USB 2.0 connectivity and is equipped with a robust cable that ensures proven anti-EMI performance for reliable signal transmission at speeds of up to 921.6 Kbps baud rate.

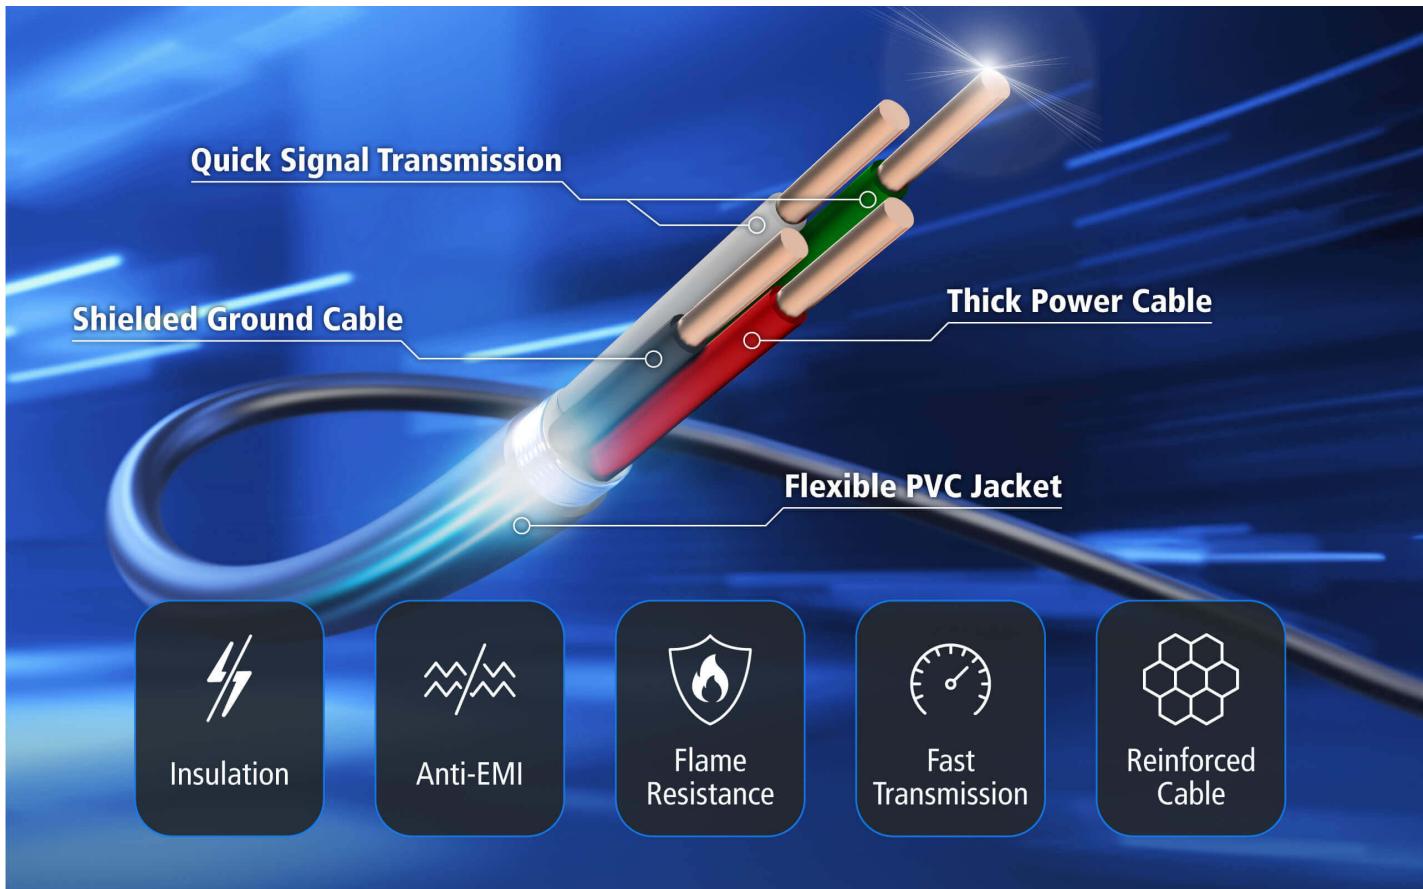

## USB-A



Laptop




PC

## RS-232



Modem



Network Switch



PLC Controller



Printer



Scanner



POS



**Broadly Compatible with Serial Devices**


The UC232A1 allows your PC or laptop to control and communicate with various RS232 serial devices such as modem, network switch, PLC controller, printer, scanner, POS and so on.

**Applications**

- 1.
- 2.
- 3.
- 4.



Barcode Scanning

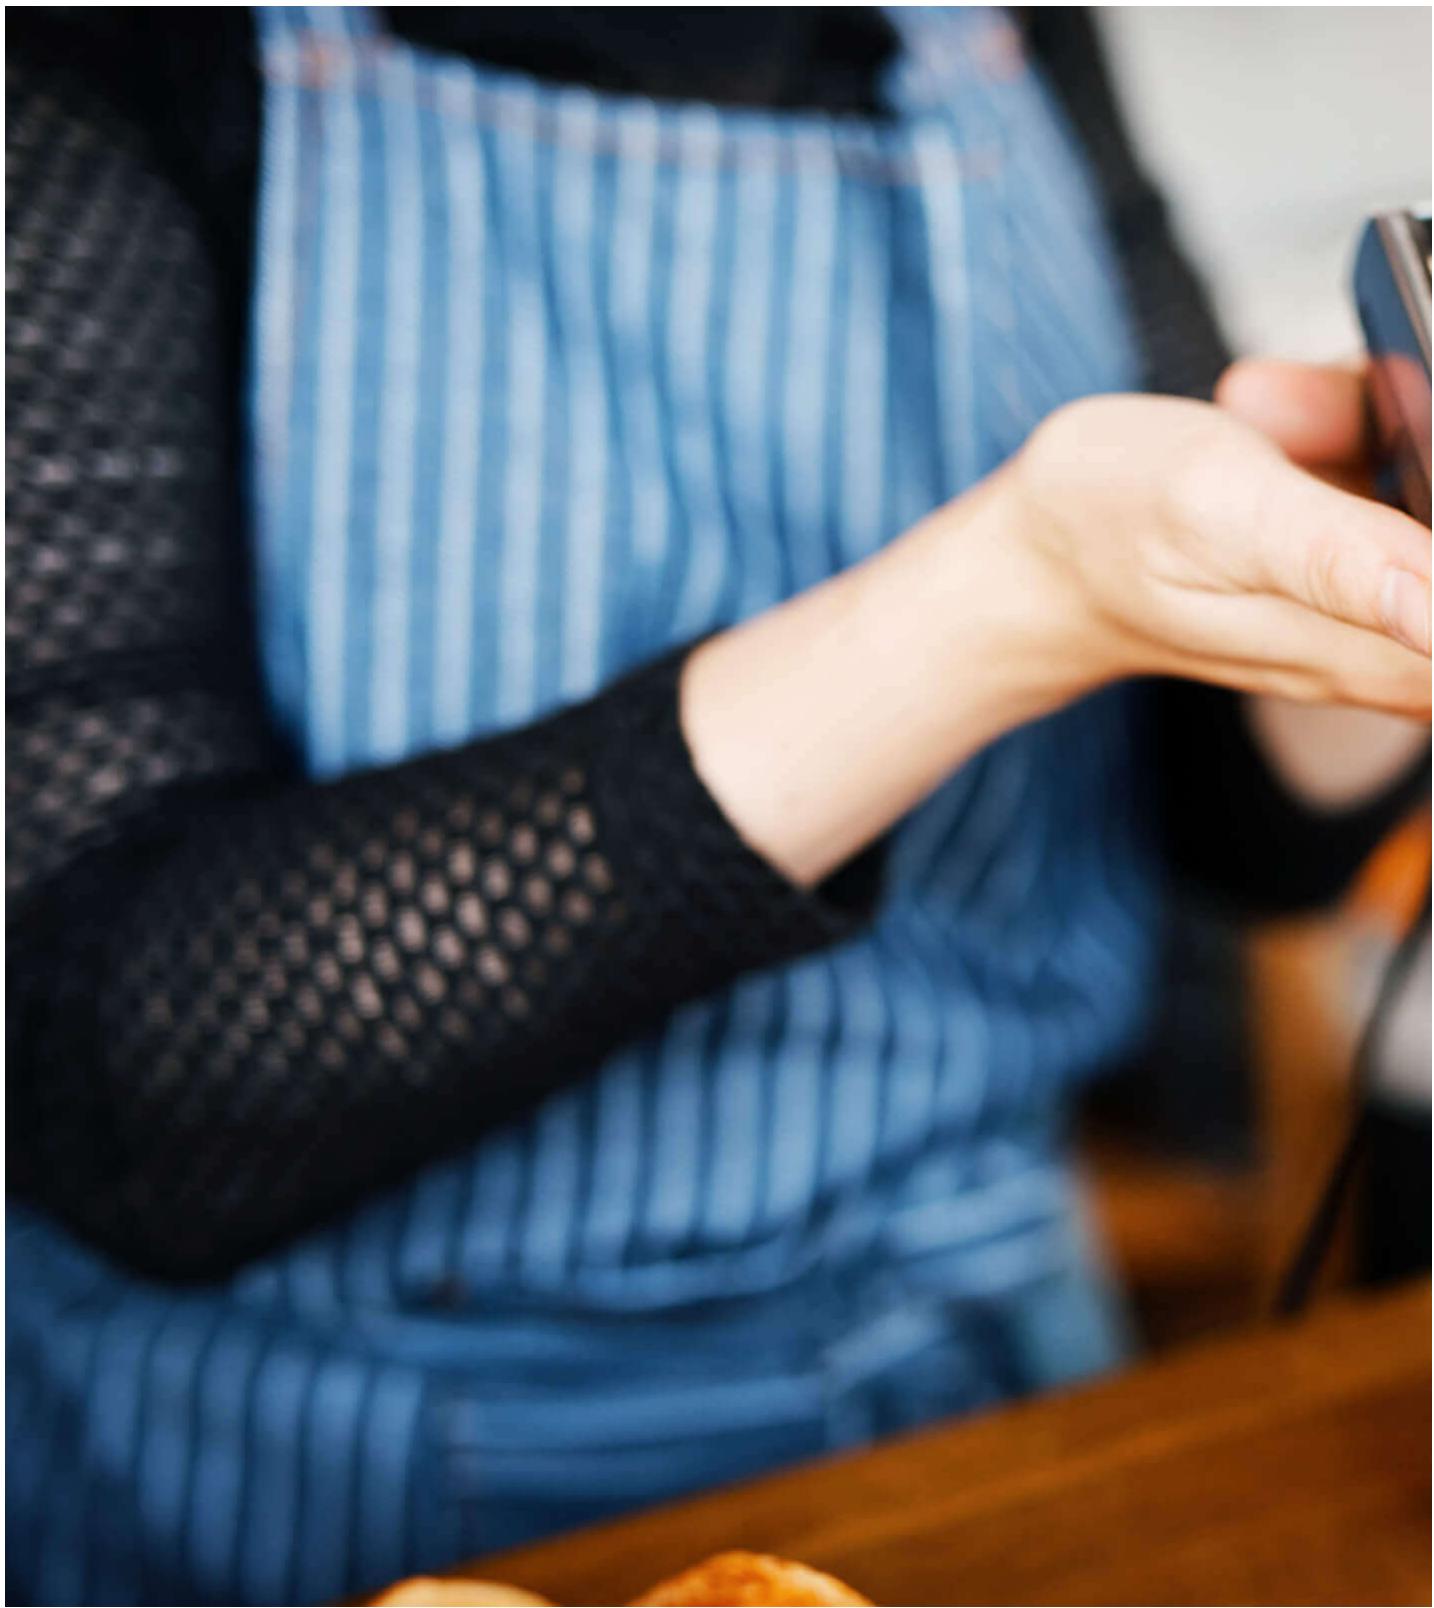

POS Terminal



PLC Programming

**Medical / Scientific Instrument**[Previous](#) [Next](#)**Product Comparison**

The UC232 lineup is well-suited for a variety of applications including industrial automation, IT networking, and control systems.

\*Notes: Models equipped with FTDI chip provide better signal transmission with legacy Windows OS.

[Talk to Our Experts](#)

If you prefer to have ATEN contact you, please complete the form and a representative will be in touch with you shortly

First Name \*

Last Name \*

- Country \*


Company \*

Email \*

Phone Number \*

- Customer Type \*

Job Title \*

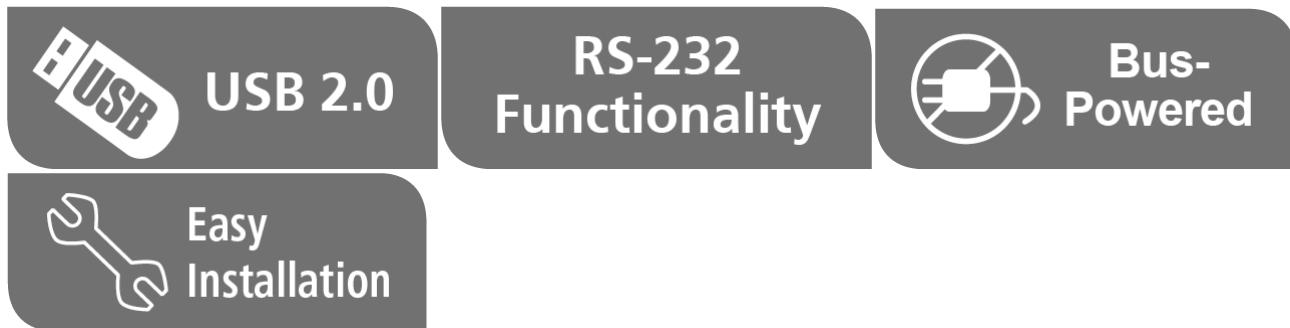

#### Features

The UC232A series USB-to-RS232 serial port converter is the ideal accessory for laptop and desktop computers that do not have a COM or DB9 serial port. Supporting both PC and Mac systems with baud rates up to 921.6 Kbps for rapid performance, it offers a convenient connectivity solution for industrial automation systems, scientific instruments, point of sale systems, and other specialized industrial and consumer applications.

The UC232A1 series now supports mobile devices as a computing host (Android 3.2 and above). The UC232A1 series SDK is available for download in the Support and Downloads section.

#### NOTICE

If your Linux kernel is between v2.6.15 ~ v5.4 and your device has a new chipset version, please update the Linux driver.

Note: This driver works with 2021 or later chipset version device only.

Use the link below to identify which chipset version your device is


<https://eservice.aten.com/eServiceCx/Common/FAQ/view.do?id=18695>

- Support the RS232 Serial interface
- Full compliance with the USB Specification
- Up to 921.6 Kbps data transfer rate
- Works with cellular phones, PDAs, digital cameras, modems or ISDN terminal adapter
- OS Compatibility: Windows, Mac, Linux

## Specification

Connectors	
USB Port	1 x USB Type A Male (White)
Serial	1 x DB-9 Male (Silver)
Data Rate	Up to 921.6 Kbps
Cable Length	1m
LEDs	Power (Orange)
Power Mode	Bus Powered
USB Specification	USB compliant
Environmental	
Operating Temperature	0–40°C
Storage Temperature	-20–60°C
Humidity	0–80% RH, Non-condensing
Physical Properties	
Housing	Plastic
Weight	0.06 kg ( 0.13 lb )
Dimensions (L x W x H)	6.59 x 3.40 x 1.60 cm (2.59 x 1.34 x 0.63 in.)
Power Consumption	DC5V:0.155W:1BTU/h  Note: • The measurement in Watts indicates the typical power consumption of the device with no external loading. • The measurement in BTU/h indicates the power consumption of the device when it is fully loaded.
Note	For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format.

## Diagram

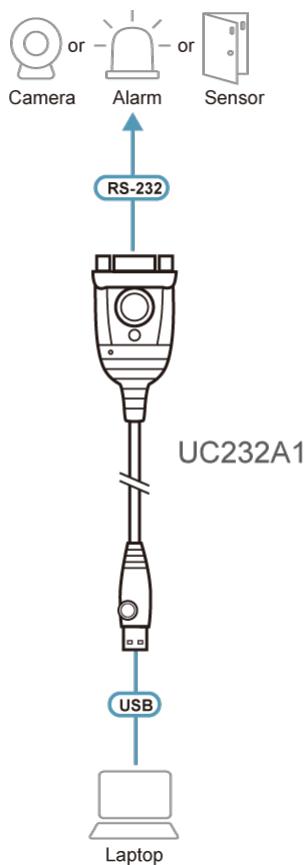



Simply Better Connections

**ATEN International Co., Ltd.**

3F, No.125, Sec. 2, Datong Rd., Sijih District., New Taipei City 221, Taiwan  
Phone: 886-2-8692-6789 Fax: 886-2-8692-6767  
www.aten.com E-mail: marketing@aten.com



© 2009 ATEN® International Co., Ltd.  
ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.  
All rights reserved. All other trademarks are the property of their  
respective owners.