

UH3232

USB-C Multiport Mini Dock



The UH3232 USB-C Multiport Mini Dock connects a USB-C computer to an Ethernet, HDMI, VGA and USB Type-A port— through a single cable. The UH3232 features an integrated and easy-to-use connector that instantly links your USB-C or Thunderbolt™ 3 computer to an HDMI 4K Ultra HD (3840 x 2160 @ 30 Hz) or VGA 2K (2048 x 1152 @ 60 Hz) video output, USB 3.1 Gen 1 port, and Gigabit Ethernet port for fast desktop docking. The 6-layer PCBA design reduces signal distortion and interference for uninterrupted video that is always crisp and sharp, while the Gigabit Ethernet port delivers Internet speeds up to 1000 Mbps. This convenient and versatile dock offers a perfect portable solution for connecting multiple sources to a USB-C enabled computer – quickly.

This small, portable, and travel friendly dock gives you more desktop space wherever you are and makes connecting to multiple devices easy. With ATEN's UH3232, you can travel lighter, connect faster and work more effective, anywhere.



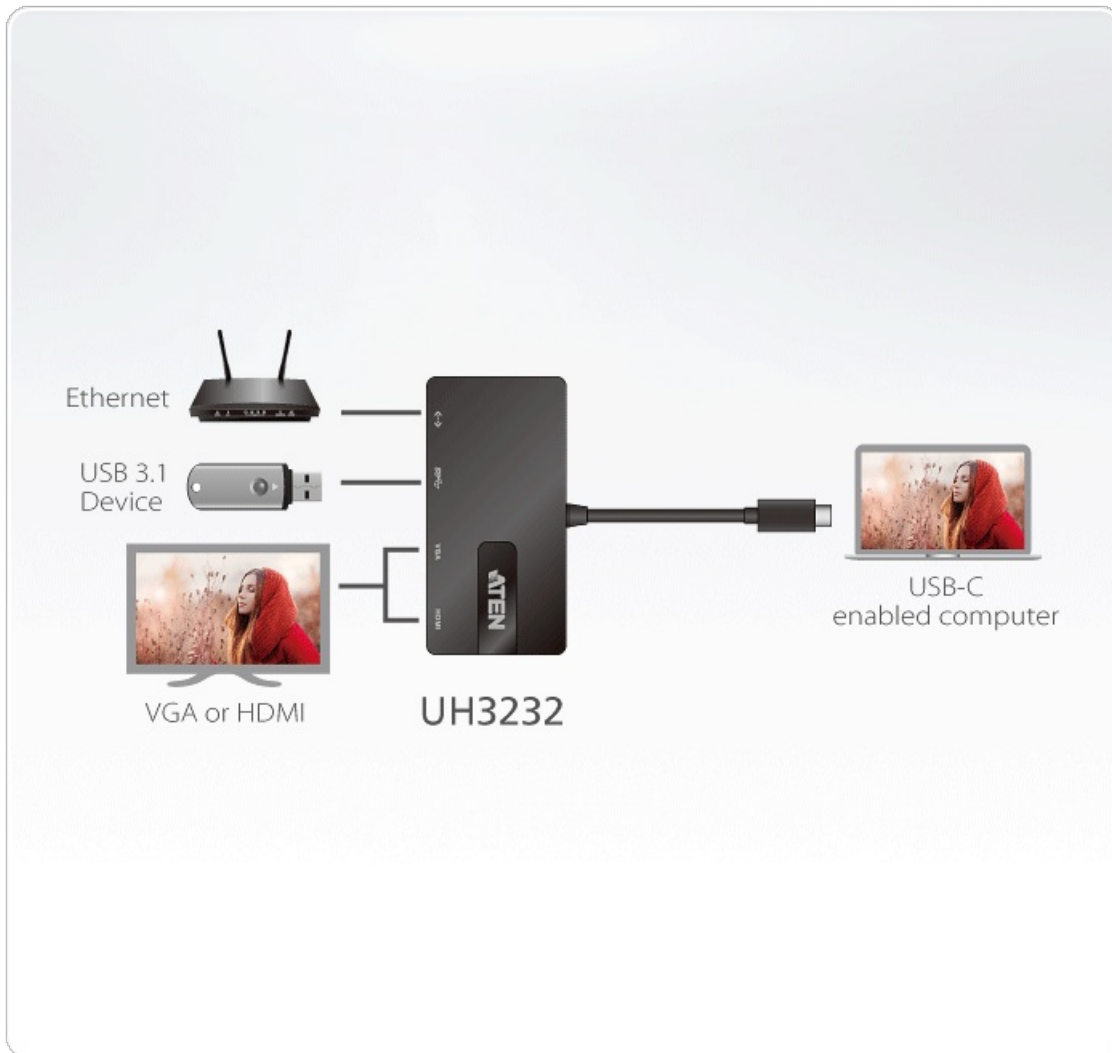
Features

- Connects a USB-C or Thunderbolt™ 3 computer to an HDMI/VGA, Ethernet and USB Type-A port via single cable
- USB 3.1 Gen 1 port with data transfer rates up to 5 Gbps
- Ethernet Gigabit LAN port
- Supports HDMI 1.4b with 4K (3840 x 2160 @ 30 Hz) resolutions; or VGA with 2K (2048 x 1152 @ 60 Hz) resolutions
- Lightweight design – for easy transport
- Works with all major operating systems: Windows®, OS X®, and i-Pad Pro*

*Support iPad Pro video output and USB keyboard only

Specification

| | |
|------------------------|---|
| Computer Connections | 1 |
| Connectors | |
| Computer | 1 x USB-C Male (Black) |
| Device | 1 x USB 3.1 Gen1 Type A Female (Blue) |
| Video Output | 1 x HDMI Female (Black) 1 x VGA Female (Black) |
| LAN Ports | 1 x Gigabit Ethernet Female (Black) |
| Video Resolution | <p>Single View: *</p> <p>VGA - 2048*1152@60 or HDMI - 3840*2160@30</p> <p>*With Intel 7th-Generation Core Processor (Kaby Lake) and above. More info about CPU generation, please find: https://www.intel.com/content/www/us/en/processors/processor-numbers.html For video output to work through a USB-C port, device with DP Alt Mode support is required.</p> |
| Power Consumption | <p>DC5V:7.87WBTU/h</p> <p>Note:</p> <ul style="list-style-type: none"> ● The measurement in Watts indicates the typical power consumption of the device with no external loading. ● The measurement in BTU/h indicates the power consumption of the device when it is fully loaded. |
| Environmental | |
| Operating Temperature | 0–40°C |
| Storage Temperature | -20–60°C |
| Humidity | 0–80% RH, Non-condensing |
| Physical Properties | |
| Housing | Plastic |
| Weight | 0.07 kg (0.15 lb) |
| Dimensions (L x W x H) | 15.88 x 10.80 x 1.52 cm (6.25 x 4.25 x 0.6 in.) |
| Note | For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format. |

Diagram**ATEN International Co., Ltd.**

3F, No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan
Phone: 886-2-8692-6789 Fax: 886-2-8692-6767
www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.
ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.
All rights reserved. All other trademarks are the property of their
respective owners.