

VS1508

8-Port VGA/Audio/RS-232 Cat 5 Splitter



The VS1508 Cat 5 Audio/Video Splitter is a splitter designed to connect one source to 8 displays over a long distance. Incorporating suggested compatible receivers *, the VS1508 A/V Over Cat 5 Splitter can be a complete solution ideal for any professional A/V installation that requires multimedia content to be delivered to multiple destinations located up to 500 m away from the source.

* Suggested Compatible Receiver Units:

[VB552](#) VGA Over Cat 5 Repeater + Audio

[VE200R](#) Audio/Video Receiver

Cascadable to three levels, the VS1508 can support thousands of displays when combined in an installation with ATEN repeaters or extenders. Incorporating RS-232 connectivity so serial devices such as touchscreens can be included in the installation.

The solution is perfect for a wide range of applications:

- In-store or tradeshow digital signage
- Broadcasting information to public locations
- Sporting events
- Theater and lecture overview rooms
- Classroom and company training facilities



Fonctionnalités

- One video input to 8 video outputs
- Cascadable to three levels - provides up to thousands of video signals when combined in an installation with ATEN receiving devices*
- Audio and serial enabled
- Uses Cat 5e (or higher) cable to extend displays up to 150 m, 450 m when combined with aten receiving devices
- High quality video - supports 1920 x 1200 @ 60Hz
- Group screens off/on function
- Provide a RS-232 channel for selection**

*Receiving Devices

a. ATEN [VB552](#) (VGA Over Cat 5 Repeater)

b. ATEN [VE200R](#) (Audio/Video Extender)


** Only one RS-232 channel can be selected at a time

Caractéristiques

Entrée vidéo	
Interfaces	1 x HDB-15 mâle (Bleu)
Impédance	75 Ω
Distance maxi.	1,8 m
Sortie vidéo	
Interfaces	1 x HDB-15 femelle (Bleu) - Sortie locale 8 x RJ-45 femelle
Impédance	75 Ω
Vidéo	
Bande passante maxi.	300 MHz
Résolutions maxi. / Distance	Jusqu'à 1920 x 1200@60 Hz@30 m ; 1280 x 1024@60 Hz@150 m
Audio	
Entrée	1 x Mini Jack stéréo femelle (Vert)
Sortie	1 x Mini Jack stéréo femelle (Vert)
Contrôle	
RS-232	Connecteur : 1 x DB-9 femelle (Noire); 1 x DB-9 mâle (Noire)
Connecteurs	
Alimentation	1 x Fiche CC (Noire)
Consommation électrique	DC5.3V:7.93W:37BTU
Environnement	
Température de fonctionnement	0-50°C
Température de stockage	-20 - 60°C

Humidité	0 - 80 % d'humidité relative, sans condensation
Propriétés physiques	
Boîtier	Métal
Poids	0.76 kg (1.67 lb)
Dimensions (L x l x H)	21.00 x 8.80 x 5.55 cm (8.27 x 3.46 x 2.19 in.)
Lot par carton	5 pièces
Remarque	Pour certains produits montés en rack, notez que les dimensions physiques standard LaxPxH sont exprimées avec un format LoxLaxH.

Diagramme

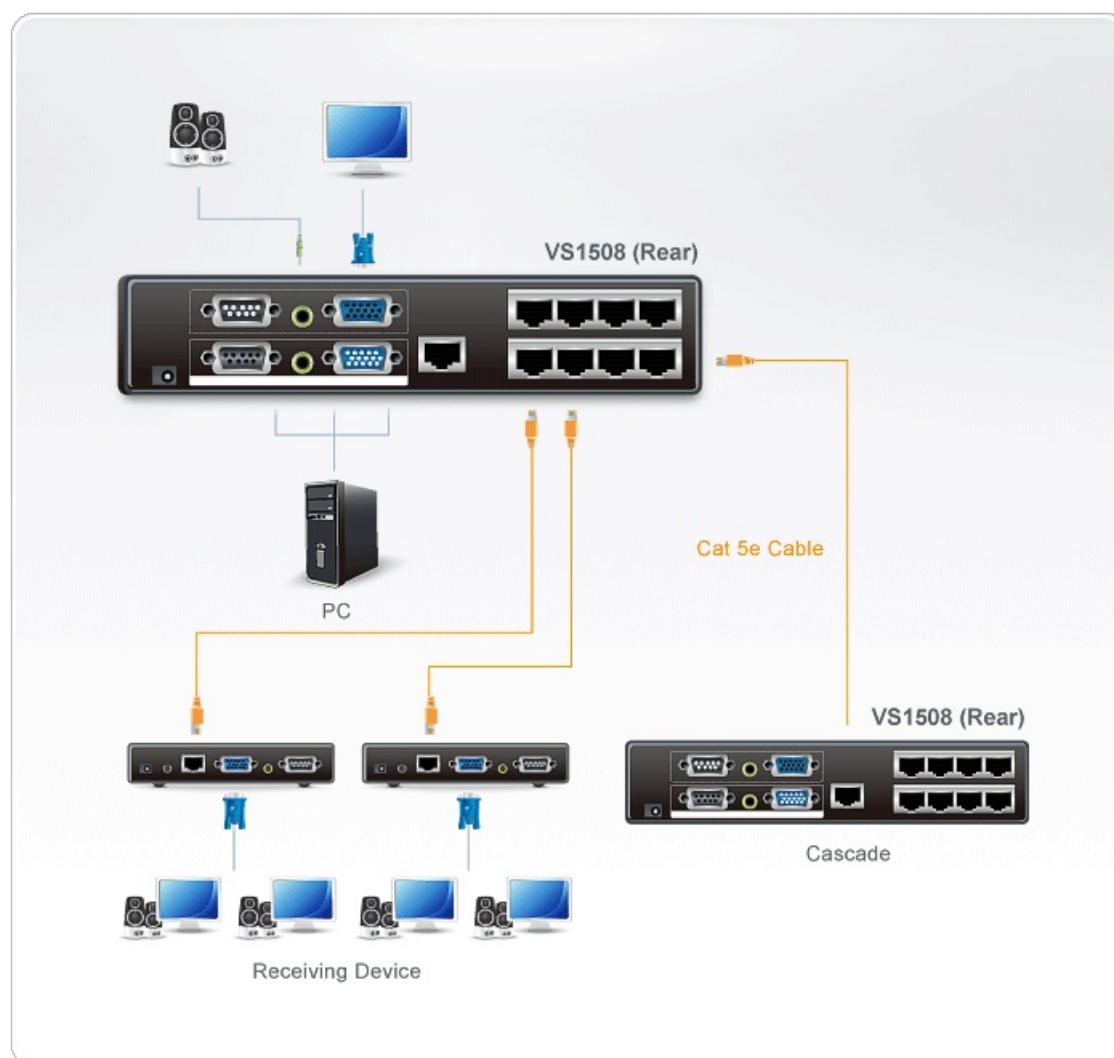



Simply Better Connections

ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan
Phone: 886-2-8692-6789 Fax: 886-2-8692-6767
www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.
ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.
All rights reserved. All other trademarks are the property of their
respective owners.