

## CS72E

2-Port PS/2 VGA Slim KVM Switch



The KVM (Keyboard, Video, Mouse) switch is a control unit that allows access to two computers from a single console (keyboard, monitor, and mouse). With its custom designed connectors, the significantly reduces the number of ports required for a 2 port KVM switch. The design features a custom SPHD-15 male connector for the keyboard, video, and mouse, and SPHD-15 female connectors for the cables that connect the switch to the computers.


### Features

- One PS/2 console controls 2 computers.
- Compact, modern case for convenient attractive placement.
- Custom connector layout.
- Power on detection - automatically switches to the first powered on port.
- Computer selection via front panel pushbuttons and hotkeys.
- Superior video quality - up to 2048 x 1536; DDC2B.
- Supports Microsoft IntelliMouse and the scrolling wheel on most mice.
- Auto Scan function to monitor computer operation.
- Non-powered.
- OS Support: Windows 2000, Windows XP, [Windows Vista](#), LINUX and FreeBSD

## Specification

|                        |   |
|------------------------|---|
| Computer Connections   | 2   |
| Port Selection         | Hotkey, Pushbutton  |
| Connectors             |   |
| Console Ports          | 1 x SPHD-15 Male (Yellow)   |
| KVM Ports              | 2 x SPHD-15 Female (Yellow)   |
| Power                  | 1 x DC Jack   |
| Switches               |   |
| Ports                  | 2 x Pushbutton  |
| LEDs                   |   |
| Selected               | 2 (Green)   |
| Emulation              |   |
| Keyboard / Mouse       | PS/2  |
| Video                  | 2048 x 1536 @ 60Hz; DDC2B   |
| Scan Interval          | 5 seconds   |
| Power Consumption      | DC5V:0.30W:6BTU/h<br><br>Note:<br>● The measurement in Watts indicates the typical power consumption of the device with no external loading.<br>● The measurement in BTU/h indicates the power consumption of the device when it is fully loaded. |
| Environmental          |   |
| Operating Temperature  | 0-50°C  |
| Storage Temperature    | -20-60°C  |
| Humidity               | 0~80% RH, Non-condensing  |
| Physical Properties    |   |
| Housing                | Metal   |
| Weight                 | 0.32 kg ( 0.7 lb )  |
| Dimensions (L x W x H) | 12.50 x 8.15 x 2.50 cm<br>(4.92 x 3.21 x 0.98 in.)  |
| Note                   | For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format.   |

# Diagram

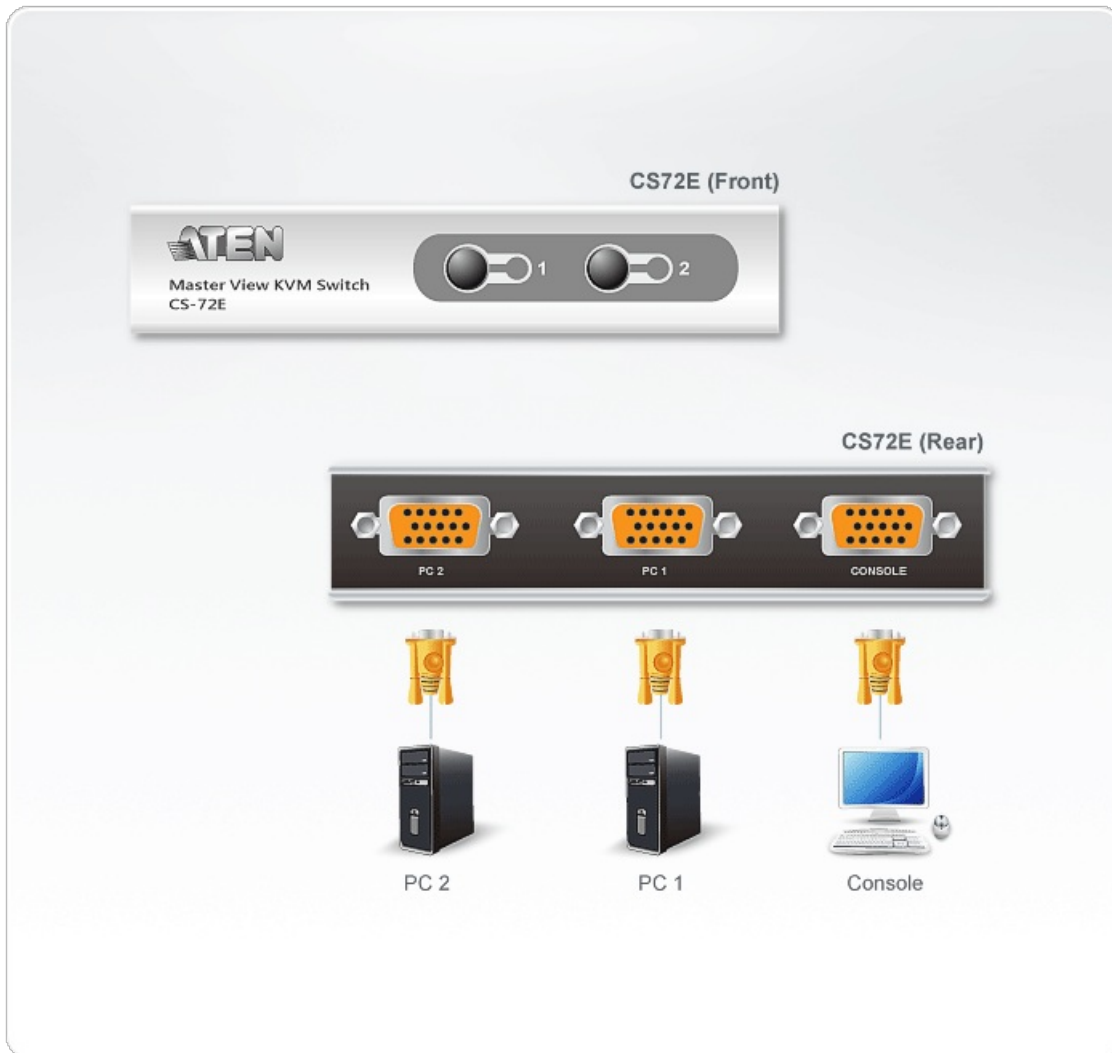

## ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan  
 Phone: 886-2-8692-6789 Fax: 886-2-8692-6767  
 www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.  
 ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.  
 All rights reserved. All other trademarks are the property of their  
 respective owners.