

## KA7171

USB-PS/2 KVM Adapter Module with Local Console



For smooth operation and added convenience, ATEN's KA7171 USB-PS/2 KVM Adapter Module is designed to provide a full console connection locally in a KVM over IP Switch or Matrix KVM\* installation. The KA7171 allows a PS/2 or USB server to be connected to the switch via Cat 5e/6 cable and provides an extra console via USB keyboard, USB mouse, and monitor to use for extended local operations. In addition, the Privileged Console Control function prevents remote users from operating the device when a local administrator requires full control of the server - reducing conflicts and unwanted operations.

### 2 Years Extended Warranty

Extend your warranty to 5 years by purchasing an extra 2 years additional warranty. Click on the banner below.



## ATEN Extended Warranty – Purchase Peace of Mind

• Add 2 years additional warranty for Altusen and VanCryst range

For more information, contact [sales@aten.co.uk](mailto:sales@aten.co.uk)



### Features


- Cat 5e/6 cable connects the device and KVM switch
- Supports computers with PS/2 or USB keyboards and mice
- Local console operation - control your system from the extended USB keyboard, USB mouse, and monitor via local console
- Pushbutton operating mode selection for privileged console control
- Built-in ASIC for greater reliability and compatibility
- USB overcurrent detection and prevention
- Built-in ESD protection and surge protection
- Superior video quality - supports resolution up to 1920 x 1200 (Reduced blanking)\*
- Supports VGA , SVGA , SXGA , UXGA , WUXGA and multisyncmonitors; local monitor supports DDC; DDC2; DDC2B
- Easy to install – no software required - connecting cables to the devices is all it takes

\* This maximum resolution may vary depending on the transmission distance. For more details, please refer to the product pages of the connected KVM switches.

## Specification

|                          |                                                                                                                                                                                                                                                                                                              |
|--------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Connectors               |                                                                                                                                                                                                                                                                                                              |
| Console Ports            | 2 x USB Type A Female (White)<br>1 x HDB-15 Female (Blue)                                                                                                                                                                                                                                                    |
| KVM Ports                | 1 x SPHD-18 Female (Yellow)                                                                                                                                                                                                                                                                                  |
| Power                    | 1 x DC Jack (Black)                                                                                                                                                                                                                                                                                          |
| Pushbuttons              |                                                                                                                                                                                                                                                                                                              |
| Operating Mode Selection | 1 x Pushbutton                                                                                                                                                                                                                                                                                               |
| LEDs                     |                                                                                                                                                                                                                                                                                                              |
| Local                    | 1 (Green)                                                                                                                                                                                                                                                                                                    |
| Remote                   | 1 (Green)                                                                                                                                                                                                                                                                                                    |
| Emulation                |                                                                                                                                                                                                                                                                                                              |
| Keyboard / Mouse         | PS/2, USB                                                                                                                                                                                                                                                                                                    |
| Video                    | Up to 1920 x 1200 @ 60Hz; DDC2B                                                                                                                                                                                                                                                                              |
| Power Consumption        | DC5.3V:1.88W:13BTU/h<br><br>Note:<br><ul style="list-style-type: none"> <li>● The measurement in Watts indicates the typical power consumption of the device with no external loading.</li> <li>● The measurement in BTU/h indicates the power consumption of the device when it is fully loaded.</li> </ul> |
| Environmental            |                                                                                                                                                                                                                                                                                                              |
| Operating Temperature    | 0 - 50°C                                                                                                                                                                                                                                                                                                     |
| Storage Temperature      | -20 - 60°C                                                                                                                                                                                                                                                                                                   |
| Humidity                 | 0–80% RH, Non-condensing                                                                                                                                                                                                                                                                                     |
| Physical Properties      |                                                                                                                                                                                                                                                                                                              |
| Housing                  | Metal                                                                                                                                                                                                                                                                                                        |
| Weight                   | 0.33 kg ( 0.73 lb )                                                                                                                                                                                                                                                                                          |
| Dimensions (L x W x H)   | 12.70 x 8.65 x 2.50 cm<br>(5 x 3.41 x 0.98 in.)                                                                                                                                                                                                                                                              |
| Note                     | For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format.                                                                                                                                                                              |

## Diagram

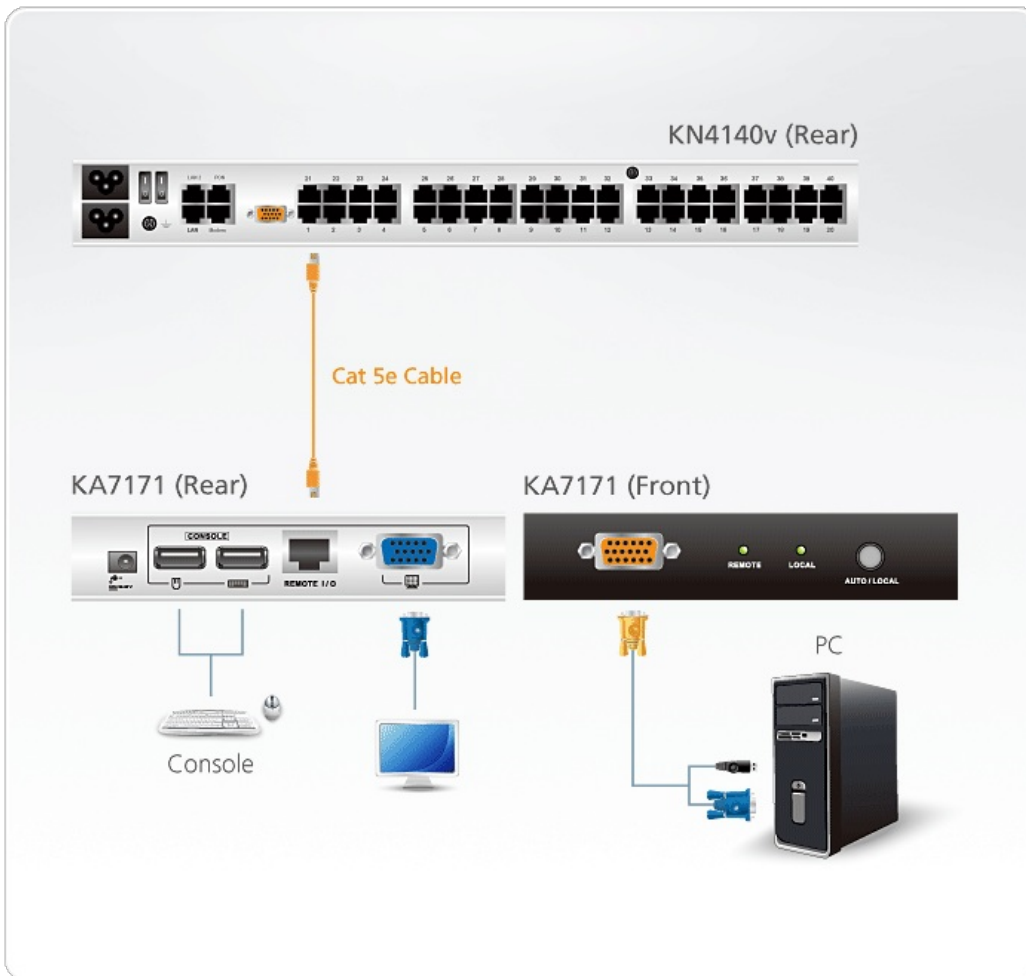

### ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan  
 Phone: 886-2-8692-6789 Fax: 886-2-8692-6767  
 www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.  
 ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.  
 All rights reserved. All other trademarks are the property of their respective owners.