

KN4032VB

1-Local/4-Remote Shared Access 32-Port Multi-Interface Cat 5 KVM over IP Switch





The KN4032VB series KVM over IP switch provides local console and remote over IP access for users to monitor and access their entire data center over a network. The KN series offers superior FHD video resolution up to 1920 x 1200, virtual media transmissions at double speed, FIPS 140-2 with level 1 security standards by using an embedded FIPS 140-2 certified OpenSSL cryptographic module. Equipped with dual on-board NICs, the KN series is built to ensure reliability and availability of remote access to all servers. The KN series can be remotely accessed via WinClient* at a console from a separated location for management and operation. ATEN also provides an iOS app – PadClient, whose intuitive interface makes it easy to connect to the KVM over IP switch and control computers direct from user's iPad. Please visit the PadClient webpage for more information.

Want to test this unit?

This KVM switch provides out-of-band access with external modem support for BIOS-level troubleshooting when the network is down. It enables IT administrators to manage network devices (e.g. server, storage, router, and switch) in server rooms via management networks that are separate from the main / production networks. If there's difficulty in accessing the network devices through the production network, the administrators can still access them via the KVM switch. The KVM switch offers several out-of-band access methods, such as a direct console connection from a local computer, a USB console connection from a laptop, a PSTN connection via modem, or a dedicated management network connection via the Ethernet (LAN) port.

The KN series can be integrated into ATEN's CC2000 Centralized Management Software. The CC2000 delivers a better user experience and advanced usability. By utilizing consolidated data, task-based navigation, and simplified menus, administrators can access, configure, and manage all of the IT equipments with ease.

The KN series is compatible with ATEN's KVM over IP Console Station – the KA82 series. The KA82 series is a standalone console that replaces PC or NB, enabling users to remotely access, monitor and control all servers connected to multiple ATEN's KN series with impenetrable security against virus threats. It is especially suitable for environments where a PC is not allowed. In addition, the KN series works with ATEN's PDU remote power management systems from the KVM over IP switches' user interface.

Additional exclusive features of KN series include Message Board, Panel Array Mode, Mouse DynaSync™, and the adapter ID. ATEN KVM over IP switches save user's time and money by allowing administrators to manage their data centers from practically anywhere – minimizing travel and MTTR (Mean Time to Repair) costs, ensuring the highest availability for data center services.

Note:

We recommend using WinClient app or JavaClient app for more robust management and control. Performance and usage may vary depending on the user's hardware configuration. A minimum of 8GB RAM, dual core CPU and a graphics card that supports OpenGL is required. Please also make sure that the browser is the latest version.





Features

Hardware

- High port density RJ-45 connectors and Cat 5e / 6 cable for up to 32 ports in 1U housing
- Laptop USB Console (LUC) a dedicated USB port directly connects to a laptop for easy console operation 4 separate buses for remote KVM over IP access (varies by different models)
- Two 10 / 100 / 1000 Mbps NICs for redundant LAN or two IP operation

- Blade server support
 Supports PS/2, USB, Sun Legacy and serial (RS-232) connectivity
 Multiplatform server environments: Windows, Mac, Sun, Linux and VT100 based serial devices
- Audio enabled
- Dual power supply
- Video resolution up to 1920 x 1200 @ 60 Hz; 24-bit color depth
- Cascadable controls up to 512 computers

Management

- · 4 separate buses for both local and remote KVM over IP access
- Integrated with ATEN CC2000 Centralized Management Software and CCVSR Video Session Recording Software
- Supports 64 user accounts and up to 32 users can be logged in at the same time for management
- Green IT Fan auto-fan-speed adjustment responding to temperature
- Event logging and Windows-based log server
- Event notification supports notification of SMTP email, SNMP Trap, and SMS (with additional mobile devices)
- Event destination event logs will be saved to Log server, Syslog server, and USB drive
- Firmware upgradeable
- Out-of-Band access modern dial-in / dial-out / dial-back support
- Adapter ID stores port information allowing administrators to relocate the servers to different ports, without having to re-configure the adapters and switches
- Port share mode allows multiple users to gain access to a server simultaneously Supports ATEN KVM over IP console station (KA82xx series)
- Power association enables the switch's KVM ports to be associated with ATEN PDUs power outlets for remote power management
- Supports IPv4, IPv6

· Easy-to-Use Interface

- Supports PadClient application on an iPad for mobile management
- Panel Array Mode™ monitors all ports in a grid display (both local and remote screens)

 Local console, browser-based, and AP GUIs offer a unified multi-language interface to minimize the user training time and increase productivities
- Multiplatform client support (Windows, Mac OS X, Linux, and Sun)

- Multi-browser support Internet Explorer, Chrome, Firefox, Safari, Opera, and Netscape

 Browser-based GUI in pure Web technology allows administrators to perform administrative tasks without pre-installed software. (e.g. Java)

 Supports web-friendly KVM-over-IP access with HTML5 WebClient viewer users can remotely access all the connected servers and PCs without Java or browser plug-in installation
- Users can launch multiple virtual remote desktop sessions to control multiple servers during the same login
- Full-screen or sizable and scalable virtual remote desktop
- Keyboard / mouse broadcast keyboard and mouse signals can be duplicated across all servers simultaneously
- Video syncing with the local console local console monitor's EDID information stored on the KVM adapter for display resolution optimization

Security

- High-grade security supports FIPS 140-2 level 1 security standards that use an embedded FIPS 140-2 certified OpenSSL cryptographic module (Certificate #1747, #2398, #2473)
 Remote authentication support: RADIUS, LDAP, LDAPS, and MS Active Directory
- Supports TLS 1.2 with 128-bit SSL, 256-bit AES encryption algorithms, along with 2048-bit RSA certification, ensuring secure data transmission during browser login
- Support for IP / MAC filter
- Configurable user and group permissions for server access and control
- Automated CSR creation utility and third party CA certificate authentication

Virtual Media

- Virtual media enhances data transmission performance, ideally for file transfers. OS patching, software installations and diagnostic testing
- Works with USB enabled servers in operating system and BIOS level
- Supports USB2.0 DVD / CD drives, USB mass storage devices, PC hard drives and ISO images

Virtual Remote Desktop

- Video quality such as monochrome color depth, threshold and noise settings, bandwidth increment / reduction can be adjusted for optimizing data transfer speed
- Mouse DynaSync™ automatically synchronizes the local and remote mouse movements
- On-screen keyboard with multi-language support
- BIOS-level access for troubleshooting

Specification

Console Connections	
Local	1 (Share)




Remote	4		
Computer Connections	Computer Connections		
Direct	32		
Maximum	512 (via Cascade)		
Port Selection	Pushbuttons, Hotkeys, GUI		
Connectors			
Console Ports	2 x USB Type-A Female (White) 1 x HDMI Female (Black) 1 x VGA HDB-15 (Blue)		
USB Port	3 x USB Type-A Female		
Audio	2 x Audio Jack Female		
Laptop USB Console (LUC) Port	1 x USB Mini-B Female		
KVM Ports	32 x RJ-45 Female		
Serial	1 x RJ-45 Female		
LAN Ports	2 x RJ-45 Female		
PON	1 x RJ-45 Female		
Power	2 x IEC 60320/C14		
Switches			
Port Selection	2 x Pushbuttons		
Reset	1 x Semi-recessed Pushbutton		
Power	2 x Rocker Switches		
LEDs			
Online / Selected	32 (Green/Orange)		
Link 10 / 100 / 1000 Mbps	2 (Red/Orange/Green)		
Power	2 (Green)		
Emulation			
Keyboard / Mouse	PS/2; USB		
Video			
Local	1920 x 1200 @ 60Hz		
Remote	1920 x 1200 @ 60Hz		
Scan Interval	1 – 255 Sec		
Maximum Input Power Rating	100–240V~; 50-60Hz; 1A		
Power Consumption	AC110V:47.6W:276BTU/h AC220V:46.7W:272BTU/h		
	Note: The measurement in Watts indicates the typical power consumption of the device with no external loading. The measurement in BTU/h indicates the power consumption of the device when it is fully loaded.		
Environmental			
Operating Temperature	0 - 40°C		
Storage Temperature	-20 - 60°C		
Humidity	0 - 80% RH, Non-condensing		
Physical Properties			
Housing	Metal		



Weight	5.22 kg (11.5 lb)
Dimensions (L x W x H)	43.36 x 41.21 x 4.40 cm (17.07 x 16.22 x 1.73 in.)
Note	For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format.

Diagram

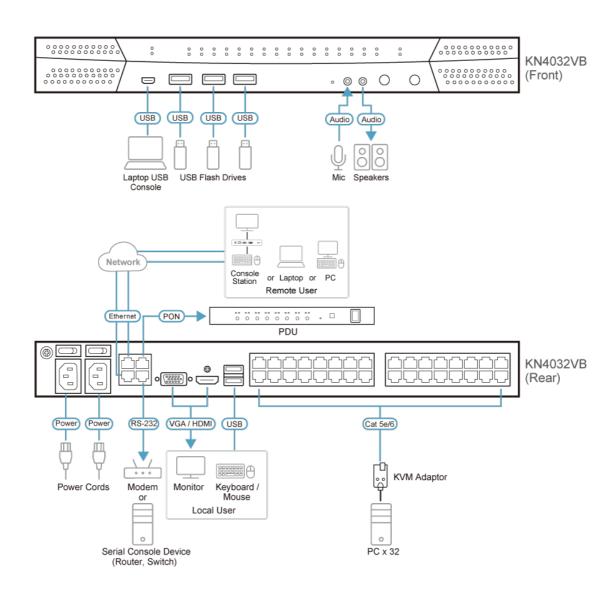

ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan Phone: 886-2-8692-6789 Fax: 886-2-8692-6767

www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.
ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.
All rights reserved. All other trademarks are the property of their respective owners.