

## EA1140

Temperature Sensor



For environmental monitoring and management, ATEN provides sensor probes that work in tandem with the Power Distribution Units, which enable you to get readings of temperature. Environmental conditions can be monitored with alarms according to customizable minimum/maximum thresholds set for temperature.

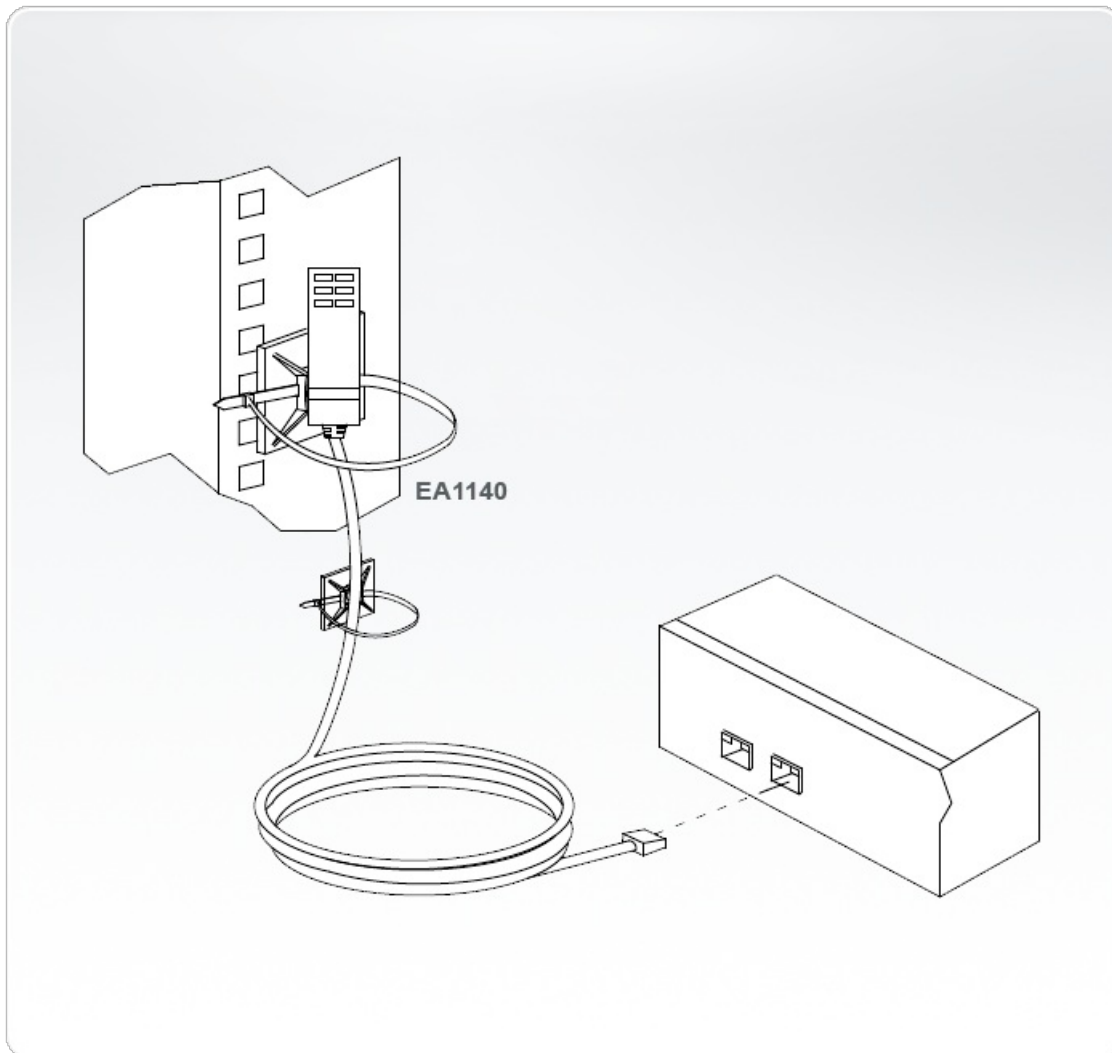
\*The Sensor is an optional accessory. You can use the ATEN PDU without environmental sensors. However, if you want to have complete energy management of your data center with the full use of ATEN solutions, a sensor installation is required.

### Features

- Measurement range: 0 – 40°C
- Measurement accuracy: +/- 1°C
- Compact design – built in 3m cable
- High sensitivity
- Easy operation

**Specification**

|                       |                     |
|-----------------------|---------------------|
| Connectors            | RJ-11 Male          |
| Measurement           |                     |
| Range                 | 0 - 40°C            |
| Accuracy              | +/- 1°C             |
| Supply Voltage        | 5 VDC (Max)         |
| Current Consumption   | 5mA(Max); 2mA(Avg.) |
| Environmental         |                     |
| Operating Temperature | 0 - 55°C            |
| Storage Temperature   | -20 - 70°C          |
| Humidity              | < 95% RH            |
| Physical Properties   |                     |
| Housing               | Plastic             |
| Weight                | 0.06 kg             |
| Cable Length          | 3 m                 |

**Diagram****ATEN International Co., Ltd.**

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan

Phone: 886-2-8692-6789 Fax: 886-2-8692-6767

www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.  
ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.  
All rights reserved. All other trademarks are the property of their  
respective owners.