

## PE0112

Basic PDU Series

PE0112A



The PE0112 series Basic PDU contains 12 AC outlets and is available in IEC or NEMA socket configurations. The PE0112 series Basic PDU features a space-saving 1U design that allows it to be mounted vertically on the outside of a rack, resulting in a more efficient use of space in the server room, while providing 12 AC outlets.


### Features

- [Basic PDU](#)
  - Space saving -1U rack mount design
  - IEC or NEMA outlet models
  - Aluminum material
- [Typical Applications](#)
  - Servers
  - Network Devices
  - Telecom Equipment

# Specification

Function	PE0112A	PE0112G
Electrical		
Nominal Input Voltage	100-120 VAC	100-240 VAC
Maximum Input Current	15A(Max) (UL de-rated 12A Max) (PSE 10A)	10A(Max)
Input Frequency	50-60 Hz	50-60 Hz
Input Connection	NEMA 5-15P	IEC-320 C14
Input Power	1800VA(MAX) ; 1440VA(UL de-rated)	2400 VA(Max)
Outlet Type	(12) NEMA 5-15R	(12) IEC 320 C13
Nominal Output Voltage	120 VAC	240V
Maximum Output Current (Outlet)	15A(Max) (UL de-rated 12A Max) (PSE 10A)	10A(Max)
Maximum Output Current (Bank)	15A(Max) (UL de-rated 12A Max) (PSE 10A)	10A(Max)
Maximum Output Current (Total)	15A(Max) (UL de-rated 12A Max) (PSE 10A)	10A(Max)
OPD(Overcurrent Protection Device)	Yes	Yes
Physical Properties		
Dimensions (L x W x H)	48.20 x 4.44 x 4.50 cm (18.98 x 1.75 x 1.77 in.)	48.20 x 4.44 x 4.50 cm (18.98 x 1.75 x 1.77 in.)
Weight	0.65 kg ( 1.43 lb )	0.65 kg ( 1.43 lb )
Power Cord Length	10ft(14#)	10ft(3x1.0mm2)
Environmental		
Temperature (Operating / Storage)	0 – 40°C / -20 – 60°C *When the environmental temperature comes close 40 degrees, it is recommended to lower the load to 60% to comply to the safety regulations.	0 – 40°C / -20 – 60°C *When the environmental temperature comes close 40 degrees, it is recommended to lower the load to 60% to comply to the safety regulations.
Elevation (Operating / Storage)	3000m	3000m
Compliance		
EMC Verification	FCC Class A	CE Class A
Safety Verification	UL	CE,LVD, UL
Note	For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format.	

Diagram

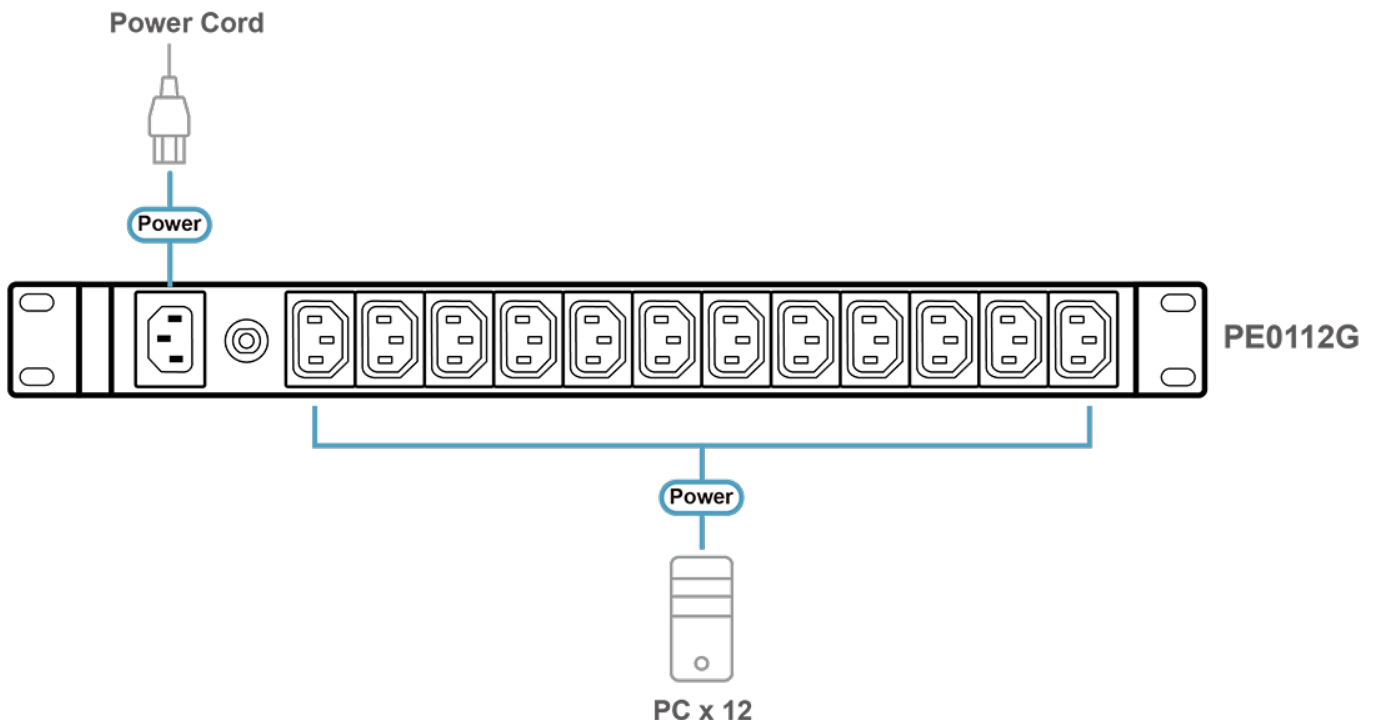

**ATEN International Co., Ltd.**

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan  
 Phone: 886-2-8692-6789 Fax: 886-2-8692-6767  
 www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.  
 ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.  
 All rights reserved. All other trademarks are the property of their respective owners.