

## VE812R

HDMI HDBaseT Receiver (4K@100m)  
(HDBaseT Class A)



The VE812R HDMI Over Single Cat 5 Receiver supports HDBaseT technology that uses a single Cat 5e cable to extend signals up to 100 m. The VE812R not only supports HDMI (3D, Deep Color ) but also Ultra HD (4k) and is HDCP compatible. Furthermore remote EDID pass-through ensures optimum video quality for your HDMI display.

The [VE812](#) is perfect for the meeting room, home theatre or any installation that needs long distance transmission and superior video quality.

### 2 Years Extended Warranty

Extend your warranty to 5 years by purchasing an extra 2 years additional warranty. Click on the banner below.

**ATEN Extended Warranty – Purchase Peace of Mind** 

• Add 2 years additional warranty for Altusen and VanCryst range

For more information, contact [sales@aten.co.uk](mailto:sales@aten.co.uk)

The banner features two hands reaching towards a central blue seal with the ATEN logo and the text 'Extended Warranty'.



## Features


- Implements HDBaseT extension technology using only one Cat 5e cable to connect the transmitter and receiver
- HDMI (3D, Deep Color, 4k); HDCP Compatible
- Anti-jamming – resists signal interference during high-quality video transmission using HDBaseT technology
- Long distance transmission - up to 100m
- Selects the optimum EDID settings for smooth power-up and highest quality display
- Supports up to 340MHz bandwidth for high performance video
- Supports Dolby True HD and DTS HD Master Audio
- Built-in 8KV / 15KV ESD protection (Contact voltage 8KV; Air voltage 15 KV)

**Specification**

## HDMI over Single Cat 5 Receiver

Video Output	
Interfaces	1 x HDMI Type A Female (Black)
Impedance	100 Ω
Video	
Max. Data Rate	10.2 Gbps (3.4 Gbps Per Lane)
Max. Pixel Clock	Up to 340 MHz
Compliance	HDMI (3D, Deep Color, 4K) HDCP Compatible Consumer Electronics Control (CEC)
Max. Resolutions / Distance	Up to 4K@70m (Cat 5e/6) / 100m (Cat 6a); 1080p@100m *4K supported: 4096 x 2160 / 3840 x 2160 @ 60Hz (4:2:0); 4096 x 2160 / 3840 x 2160 @ 30Hz (4:4:4)
Audio	
Output	1 x HDMI Type A Female (Black)
Connectors	
Power	1 x DC Jack
Power Consumption	DC5.3V:5.06W:24BTU
Environmental	
Operating Temperature	0 - 50 °C
Storage Temperature	-20 - 60 °C
Humidity	0 - 80% RH, Non-Condensing
Physical Properties	
Housing	Metal
Weight	0.41 kg ( 0.9 lb )
Dimensions (L x W x H)	14.17 x 10.30 x 3.00 cm (5.58 x 4.06 x 1.18 in.)
Carton Lot	5 pcs
Note	For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format.

Diagram

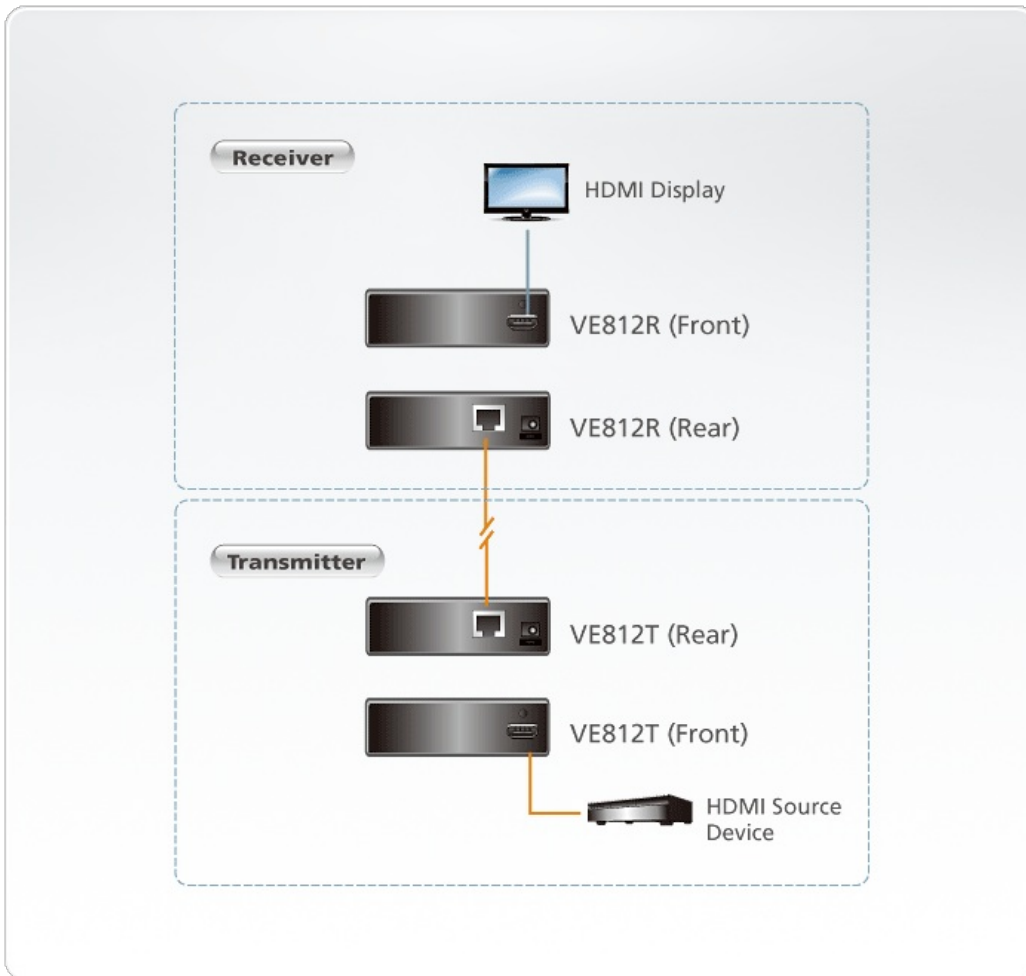

**ATEN International Co., Ltd.**

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan  
Phone: 886-2-8692-6789 Fax: 886-2-8692-6767  
www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.  
ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.  
All rights reserved. All other trademarks are the property of their respective owners.