

VE875

100m 4K HDMI Active Optical Cable



The VE875 HDMI Active Optical Cable utilizes ATEN's unique AOC+™ technology that enables conversion between input signals and optical signals for optimum high bandwidth data transmissions. This EMI-resistant optical cable comes in 100 m cable lengths with full support of 1080p resolutions that can withstand extreme conditions while improving speed and distance. It's fully compliant with HDMI standards and provides support for high-speed transmission, 3D and 4K x 2K resolutions. This cable is the ideal solution for extending the reach of your digital signage in various settings, such as in large shopping malls and hospital facilities.

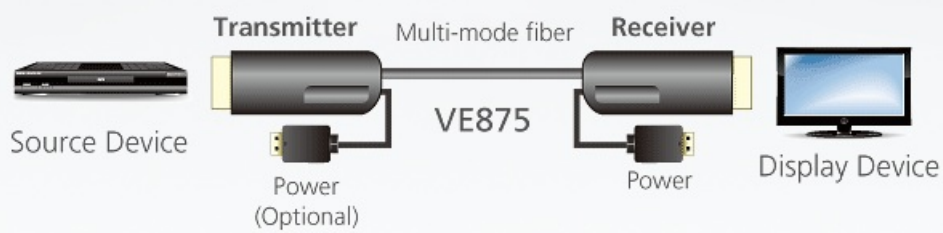


Features

- Converts electrical data signals to optical signals
- HDMI (3D, 4kx2k, Deep Color); HDCP Compatible
- Superior video quality – up to 4096 x 2160
- RF/EMI free for clear signal transmission
- Easy to install with optical fiber cable
- Powered remote unit via USB Cable
- High data transfer rates of 10.2 Gbps
- Plug-and-play – no software required

Specification

| | |
|-----------------------------|---|
| Video Input | |
| Interfaces | 1 x HDMI Type A Male (Black) |
| Impedance | 100 Ω |
| Video Output | |
| Interfaces | 1 x HDMI Type A Male (Black) |
| Impedance | 100 Ω |
| Video | |
| Max. Data Rate | 10.2 Gbps |
| Max. Pixel Clock | 340 MHz |
| Compliance | HDMI (3D, Deep Color, 4K) HDCP Compatible Consumer Electronics Control (CEC) |
| Max. Resolutions / Distance | Up to 4K@100m *4K supported: 4096 x 2160 / 3840 x 2160 @ 60Hz (4:2:0); 4096 x 2160 / 3840 x 2160 @ 30Hz (4:4:4) |
| Audio | |
| Input | 1 x HDMI Type A Male (Black) |
| Output | 1 x HDMI Type A Male (Black) |
| Connectors | |
| Power | 1 x DC Jack |
| Power Consumption | 5 VDC, 1W Note: <ul style="list-style-type: none"> ● The measurement in Watts indicates the typical power consumption of the device with no external loading. ● The measurement in BTU/h indicates the power consumption of the device when it is fully loaded. |
| Environmental | |
| Operating Temperature | 0-50°C |
| Storage Temperature | -20 - 60°C |
| Humidity | 0 - 80% RH, Non-Condensing |
| Physical Properties | |
| Housing | Metal |
| Weight | 0.71 kg |
| Carton Lot | 5 pcs |

Diagram**ATEN International Co., Ltd.**

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan
Phone: 886-2-8692-6789 Fax: 886-2-8692-6767
www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.
ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.
All rights reserved. All other trademarks are the property of their
respective owners.