

VS482


4-Port HDMI Switch with Dual Output





With more and more HDMI devices entering the Home Theater market, the need for simultaneous access to different HDMI A/V sources is becoming increasingly important. Now, the VS482 4- Port Dual View HDMI Switch offers an easy and affordable way to add HDMI capabilities to your home theater system by allowing you to switch easily between up to four HDMI A/V sources that are connected to up to two HDMI displays.

The VS482 supports four HDMI video input sources and two HDMI output displays. It is designed for two HDTV or audio/video receiver (AVR) applications. The VS482 complies with HDMI standards, and is designed to support 3D content, as well as Audio Return Channel (ARC) function. The VS482 also offers instant switching and has OSD display controls for video, audio, system configuration and information.

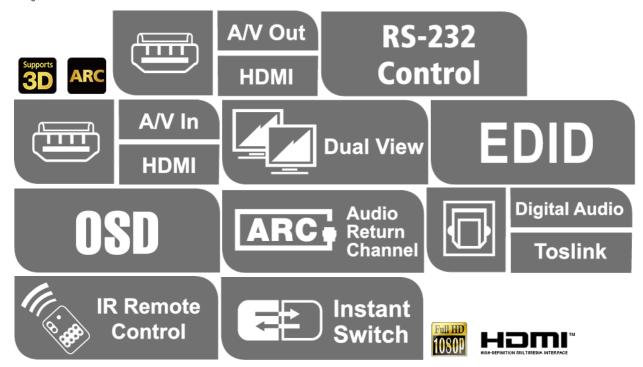



Features



Audio Return Channel (ARC)

Connect an HDMI cable to the ARC port to send audio from your source device to your audio/video receiver



Instant Switching

Instant switching between HDMI input sources via front panel pushbuttons or through the RS-232 serial control port



OSD Menu

OSD for system configuration setting and information display



EDID Expert

Feature EDID Expert technology to set up different configurations via different EDID mode

- Allows up to four HDMI A/V sources to be connected to two HDMI displays
- Supports Dolby True HD and DTS HD Master Audio
- nnect an HDMI cable to the ARC port to send audio from your source device to your audio/video receiver
- OSD for system configuration setting and information display
- Instant switching between HDMI input sources via front panel pushbuttons or through the RS-232 serial control port
- Feature EDID Expert technology to set up different configuration
 Allows users to view the HDMI input source port / device for each
- Supports superior video quality HDTV resolutions of 480p, 720p, 1080i, 1080p (1920x1080); up to WUXGA (1920 x 1200)
- Built-in bi-directional RS-232 serial control port for high-end system control *
 Extra audio from HDMI input signal that supports both optical and coaxial digital audio and one stereo audio output
- IR control signal extension extend the reach of the IR controller by adding an IR receiver unit
- · Rack mountable

Note: The VS482 AP and GUI operation instructions can be downloaded from the ATEN website (www.aten.com)

Specification


| Specification | | |
|----------------|-----------------------------------|--|
| Video Input | | |
| Interfaces | 4 x HDMI Type A Female (Black) | |
| Impedance | 100 Ω | |
| Max. Distance | 3M at 1920 x 1080 @ 60Hz (4:4:4) | |
| Video Output | | |
| Interfaces | 2 x HDMI Type A Female (Black) | |
| Impedance | 100 Ω | |
| Max. Distance | 15M at 1920 x 1080 @ 60Hz (4:4:4) | |
| Video | | |
| Max. Data Rate | 6.75 Gbps (2.25 Gbps Per Lane) | |



| Max. Pixel Clock | 225 MHz |
|------------------------|--|
| Compliance | HDMI (3D, Audio Return Channel, Deep Color) HDCP Compatible Consumer Electronics Control (CEC) |
| Max. Resolution | Up to 1080p |
| Audio | |
| Input | 4 x HDMI Type A Female (Black) |
| Output | Analog: 2 x RCA (Red / White) Digital: 1 x HDMI Type A Female (Black); 1 x Toslink (Black); 1 x RCA (Orange) |
| Control | |
| RS-232 | Connector: 1 x DB-9 Female (Black) Baud Rate and Protocol: Baud Rate: 19200, Data Bits: 8, Stop Bits:1, Parity: No, Flow Control: No |
| IR | 1 x Mini Stereo Jack Female (Black) |
| EDID Settings | EDID Mode: Default / Port1 / Auto |
| Connectors | |
| Power | 1 x DC Jack |
| Power Consumption | DC5.3V:5.74W:27BTU/h |
| | Note: The measurement in Watts indicates the typical power consumption of the device with no external loading. The measurement in BTU/h indicates the power consumption of the device when it is fully loaded. |
| Environmental | |
| Operating Temperature | 0 - 50°C |
| Storage Temperature | -20 - 60°C |
| Humidity | 0 - 80% RH, Non-Condensing |
| Physical Properties | |
| Housing | Metal |
| Weight | 2.17 kg (4.78 lb) |
| Dimensions (L x W x H) | 43.72 x 15.86 x 4.40 cm (17.21 x 6.24 x 1.73 in.) |
| Carton Lot | 3 pcs |
| Note | For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format. |



Diagram

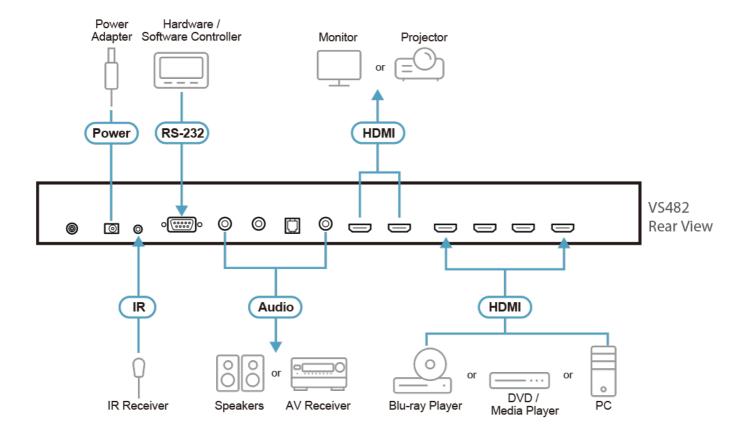

Note: Connects up to 2 display devices to the HDMI output ports, and up to 4 video source devices to the HDMI input ports.

ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan Phone: 886-2-8692-6789 Fax: 886-2-8692-6767 www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.
ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.
All rights reserved. All other trademarks are the property of their
respective owners.