

## IC485SN

RS-232/RS-485 Interface Converter



IC485SN is a 2-way converter for converting RS-232 signals to and from RS-422/RS-485 signals in long-distance applications up to 1200 m (4000 ft.) – without the need of an external power supply.


### Features

- Data transmission controlled by the RTS signal.
- DCE/DTE selectable.
- Point to point, multidrop, and simplex/duplex link selection.
- Four wire full duplex; Four wire half duplex.
- Compact size.
- Cable distance of up to 1200m (4000 ft.).
- Non powered operation.
- Supports baud rates up to 115.2Kbps.
- OS Support: Windows 2000, Windows XP

# Specification

Connectors	1 DB-25 Female (RS-232) RS-485 / RS-422 Four Terminal Block 1x RJ-11 Female
Switches	DCE, DTE TxON, RxON TxRTS, RxON TxDTR/RTS, RxDSR/ON
Power Consumption	DC9V:0.03W:1BTU/h  Note: <ul style="list-style-type: none"> <li>● The measurement in Watts indicates the typical power consumption of the device with no external loading.</li> <li>● The measurement in BTU/h indicates the power consumption of the device when it is fully loaded.</li> </ul>
Signal Range	1200 m [4000'] (Max)
Data Rate	Up to 100 Kbps under 1200 m [4000']
Environmental	
Operating Temperature	0 ~50°C
Storage Temperature	-20 ~ 60°C
Humidity	0~80% RH, Non-condensing
Physical Properties	
Housing	Plastic
Weight	0.06 kg ( 0.13 lb )
Dimensions (L x W x H)	7.90 x 5.45 x 2.10 cm (3.11 x 2.15 x 0.83 in.)
Note	For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format.

Diagram

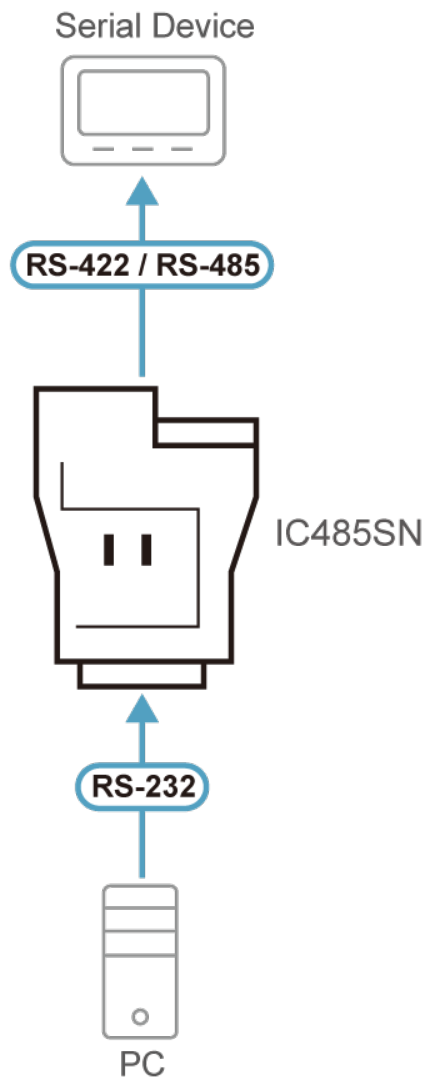

**ATEN International Co., Ltd.**

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan  
 Phone: 886-2-8692-6789 Fax: 886-2-8692-6767  
 www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.  
 ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.  
 All rights reserved. All other trademarks are the property of their respective owners.