

## UH3239

USB-C Multiport Mini Dock with Power Pass-Through




# Maximum Expansion On-the-Go

Portable USB-C dock for iPad Pro, Windows laptops, and MacBooks

6-in-1 USB-C Multiport Mini Dock with Power Pass-Through

## All in a Sleek, Compact 6-Port Dock

The ATEN UH3239 USB-C Multi-port Mini Dock provides all your essential ports in a sleek and compact device for on-the-go expansion. It's small yet packed with powerful connectivity, all from a single USB-C port.



### Lightweight, Compact Design with Ultra-Long USB-C Cable

Designed for maximum portability, the mini dock can easily fit into your bag or pocket, making it ideal to take with you on-the-go anywhere. The extended, built-in USB-C cable is 55cm long, suitable for any setup and situation with maximum convenience.

#### Hi-Res 4K@30Hz HDMI Display

Extend your viewing workspace with a single monitor for crystal-clear resolution, up to 4K@30Hz, for on-the-go presentations, conference calls, and video streaming.



## Contact Us

Get a quote for this product or get in touch with our sales experts

[Get Quote](#)

[\\_Contact Sales](#)



#### High-Speed 5Gbps Data Transfer


High-speed 2 USB-A ports and USB-C 3.2 port are capable of 5Gbps transfer speeds for quickly synchronizing a complete music library or a photo album.

#### Type-C 60W PD and Data Transfer

The USB-C port supports up to 60W power delivery providing pass-through charging for your Windows laptop, MacBook, or iPad Pro, while also supporting standard 5Gbps data transfer.  
\*Power adapter not included.



One Dock for Massive Expansion

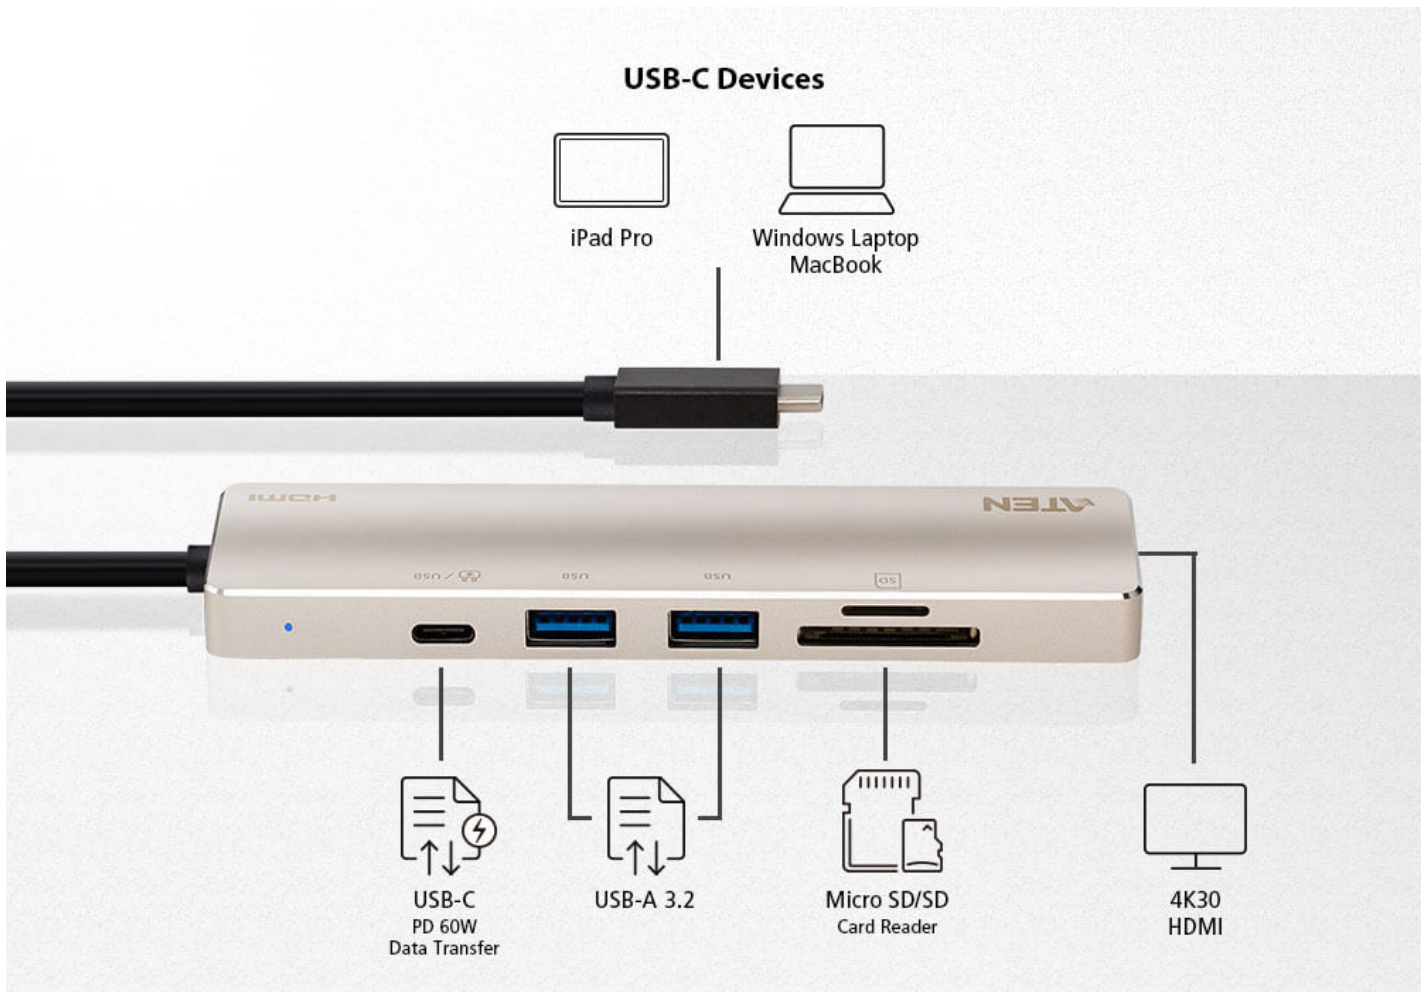

## Talk to Our Experts

If you prefer to have ATEN contact you, please complete the form and a representative will be in touch with you shortly

|                   |                                                                                   |
|-------------------|-----------------------------------------------------------------------------------|
| First Name *      |                                                                                   |
| Last Name *       |                                                                                   |
| - Country *       |  |
| Company *         |                                                                                   |
| Email *           |                                                                                   |
| Phone Number      |                                                                                   |
| - Customer Type * |  |
| Job Title *       |                                                                                   |



## Features

The UH3239 USB-C Multiport Mini Dock with Power Pass-Through is a portable, versatile and flexible 6-in-1 adapter for USB-C PCs or laptops. The durable aluminum enclosure ships with dual USB 3.2 Type-A ports, a USB-C PD port, an HDMI port along with an SD card and a MicroSD card slots. It covers users' peripheral connectivity demands while allowing power delivery to the connected USB-C device. It supports resolutions up to 4K HDMI (3840 x 2160 @ 30Hz) to ensure that every detail of the video is displayed in the crisp and sharp UHD resolution on the 4K graphics-supported laptop. Besides, its 2 USB 3.2 Gen 1 Type-A ports guarantee effective communication with peripherals at a decent 5 Gbps transmission speed. Thanks to the USB-C PD port, the UH3239 can provide power or charge the external devices, and hence, there will be no more tangled data cables on the desk.


The UH3239 is a plug-and-play device compatible with all major operating systems (Windows®, macOS X and iPadOS). It is a compact, yet competent, data and power transmission solution for on-the-go professionals when it comes to building a mobile workstation ecosystem.

- 6-in-1 multi-function dock that includes 1x HDMI, 1x SD / Micro SD card reader, 1x USB-C PD port and 2x USB 3.2 Gen 1 Type-A ports
- Supports USB PD 2.0 for laptop charging up to 60W via USB-C PD power adapter – power profiles include 5V, 12V, 15V, 20V
- Supports resolutions up to 4K (3840 x 2160 @ 30Hz) for superior video distribution
- Plug and Play – no drivers needed
- Works with all major operating systems: Windows®, macOS X and iPadOS
- Compatible with Thunderbolt™ 3 (USB-C)
- Apple M1 chip compatible

## Specification

|                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Computer Connections   | 1                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Cable Length           | 55cm                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Connectors             |                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Computer               | USB 3.2 Gen1 Type-C Male Cable                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Device                 | 2 x USB 3.2 Gen 1 Type-A female (Max. output 5V, 4.5W for each)*<br>1 x USB 3.2 Gen 1 Type-C female (Max. output 5V, 12W)*<br><br>* 2 x USB-A and 1 x USB-C ports share total 5V, 12W when UH3239 powered by PC via USB-C. (@5V,3A bus-powered)                                                                                                                                                                                                           |
| Power                  | 1 x USB Type-C Female (supports USB 3.2 Gen1 Type-C Port data transfer)<br><br>Support Power Delivery 2.0 for laptop charging up to 60W, power profiles include 5V, 12V, 15V, 20V (additional USB-C power adapter needed)                                                                                                                                                                                                                                 |
| Video Output           | 1 x HDMI Female (Black)                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Performance            |                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Flash Memory           | Supports SD V1.0/ v1.1/ v2.0/ V3.01 and V5.0<br>SD (Capacity up to 2GB)<br>SDHC (Capacity up to 32GB)<br>SDXC (Capacity up to 2TB)                                                                                                                                                                                                                                                                                                                        |
| Video Resolution       | 3840 x 2160@30Hz                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Power Consumption      | DC5V:15WBTU/h<br><br>Note:<br><ul style="list-style-type: none"> <li>● The measurement in Watts indicates the typical power consumption of the device with no external loading.</li> <li>● The measurement in BTU/h indicates the power consumption of the device when it is fully loaded.</li> </ul>                                                                                                                                                     |
| System Requirements    | Windows 10 or later, USB-C enabled computer with DP Alt Mode*<br>* With Intel 7th-Generation Core Processor (Kaby-Lake) and above. More info about CPU generation, please find:<br><a href="https://www.intel.com/content/www/us/en/processors/processor-numbers.html">https://www.intel.com/content/www/us/en/processors/processor-numbers.html</a><br><br>Mac OS X 10.12 or later, USB-C enabled computer<br><br>iPadOS 13.1 or later, iPad Pro (USB-C) |
| Environmental          |                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Operating Temperature  | 0 – 40°C                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Storage Temperature    | -20 – 60°C                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Humidity               | 0 – 80% RH, Non-condensing                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Physical Properties    |                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Housing                | Aluminum                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Weight                 | 0.07 kg ( 0.17 lb )                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Dimensions (L x W x H) | 13.30 x 3.60 x 1.10 cm<br>(5.24 x 1.42 x 0.43 in.)                                                                                                                                                                                                                                                                                                                                                                                                        |
| Note                   | For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format.                                                                                                                                                                                                                                                                                                                           |

Diagram

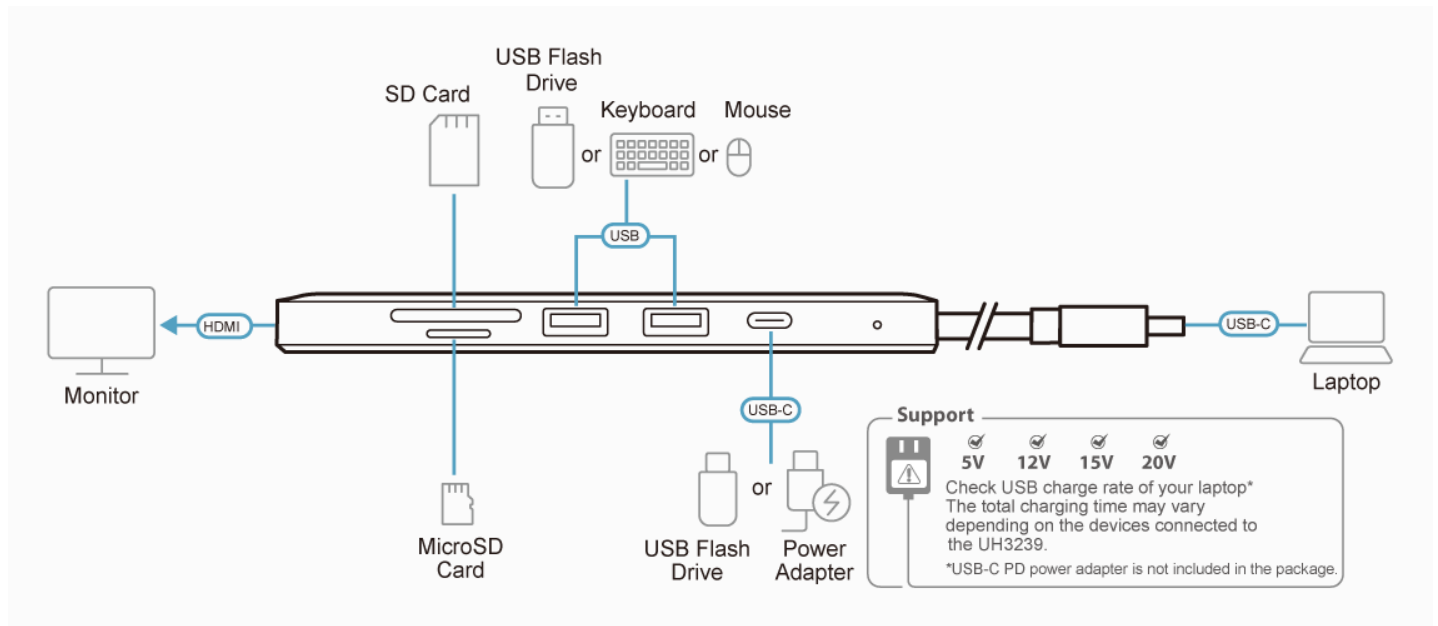
**ATEN International Co., Ltd.**

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan  
Phone: 886-2-8692-6789 Fax: 886-2-8692-6767  
www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.  
ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.  
All rights reserved. All other trademarks are the property of their respective owners.