

### VS4812

2-Port True 4K HDMI Splitter












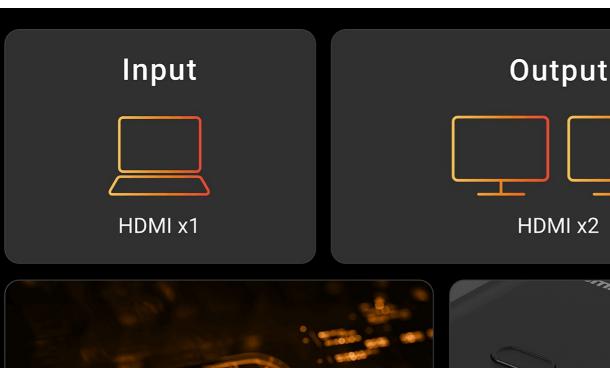

HDCP 1.4/2.2



## **Premium Audio**

DTS-HD Master Audio™ | Dolby® TrueHD



# Stunning True 4K Visuals - Stable, Reliable Dual-Display Output

ten til til did i 1940-til did i gunten politi ten deta benge, sommen politicat, dali sa pata sa til gunte sol Did did disside dum bar o dip li i forme is da simipo da fine enpublica si genje II Digest un HIII fil amplimo Did gent, habitat sa si gunter. Til digest i h HI II to, II tamo, ad I ap Tota, de 1845 Schula dida se dat anim Sin quanta in digest sa digest a digest i historia di si di si digest i di si di si di si di si di si di si di
















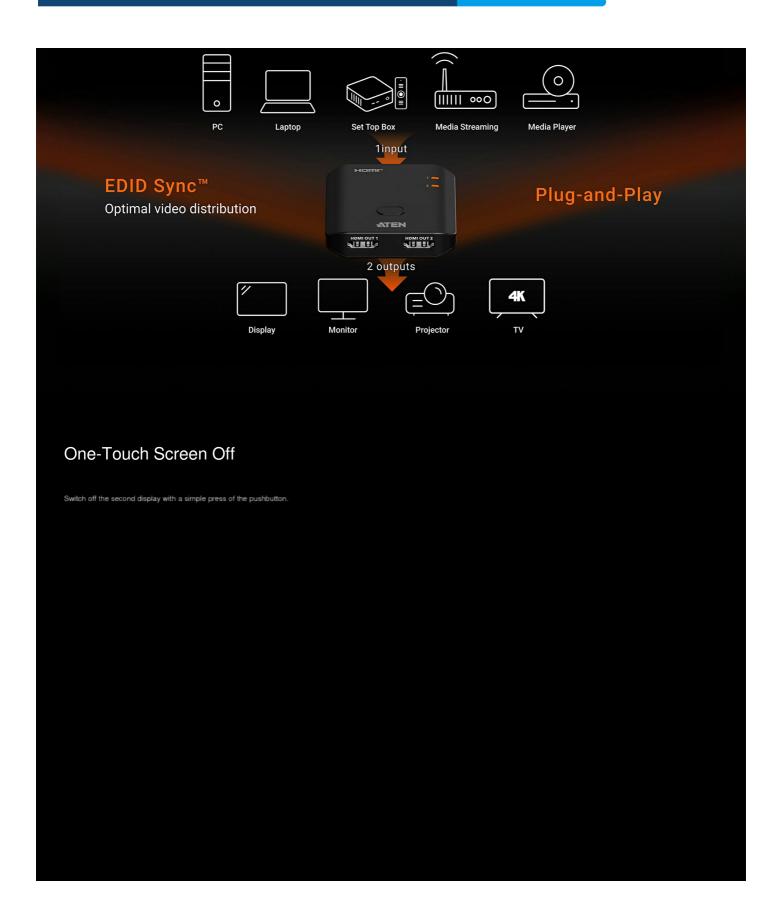




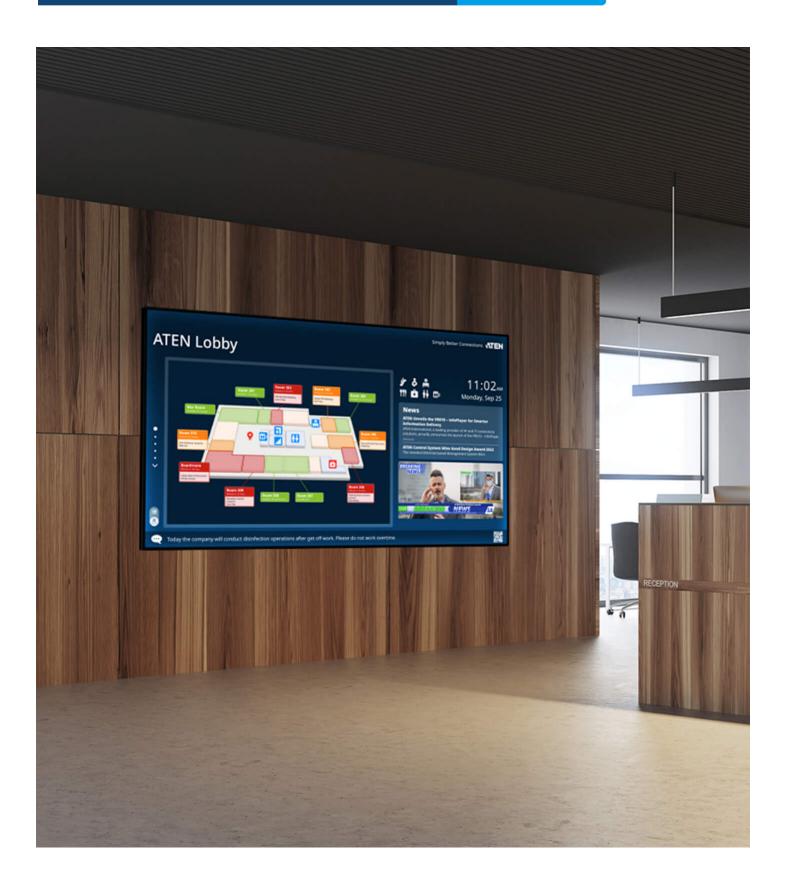




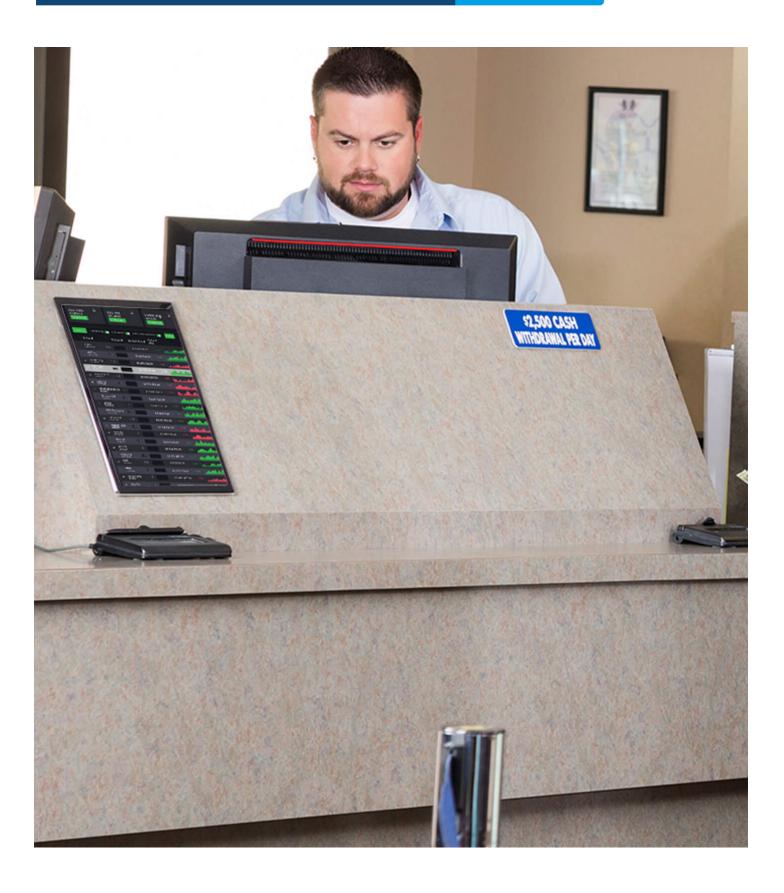




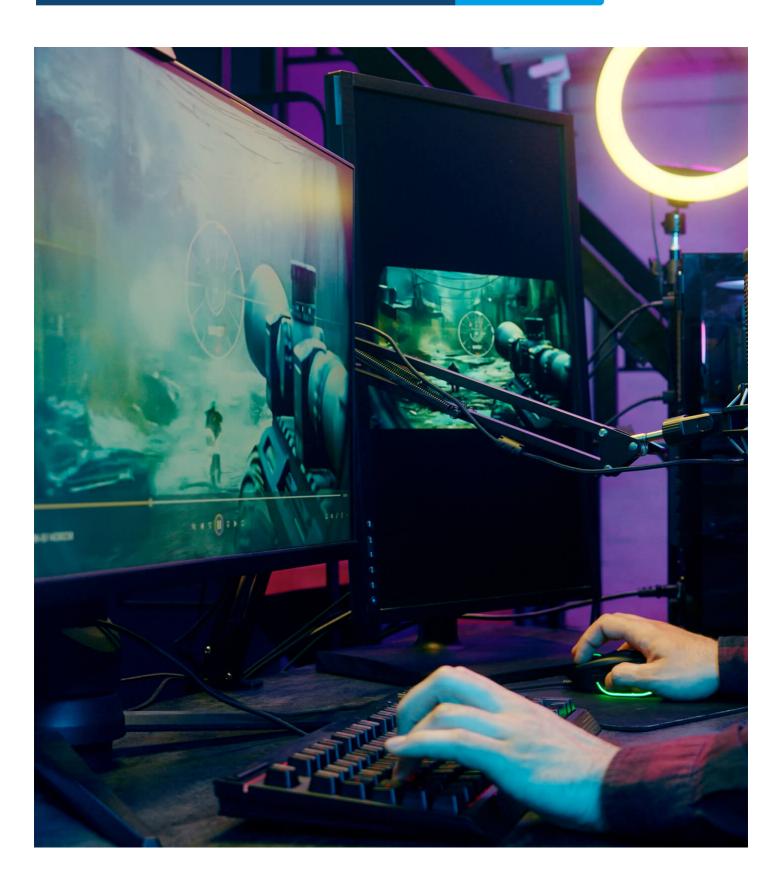



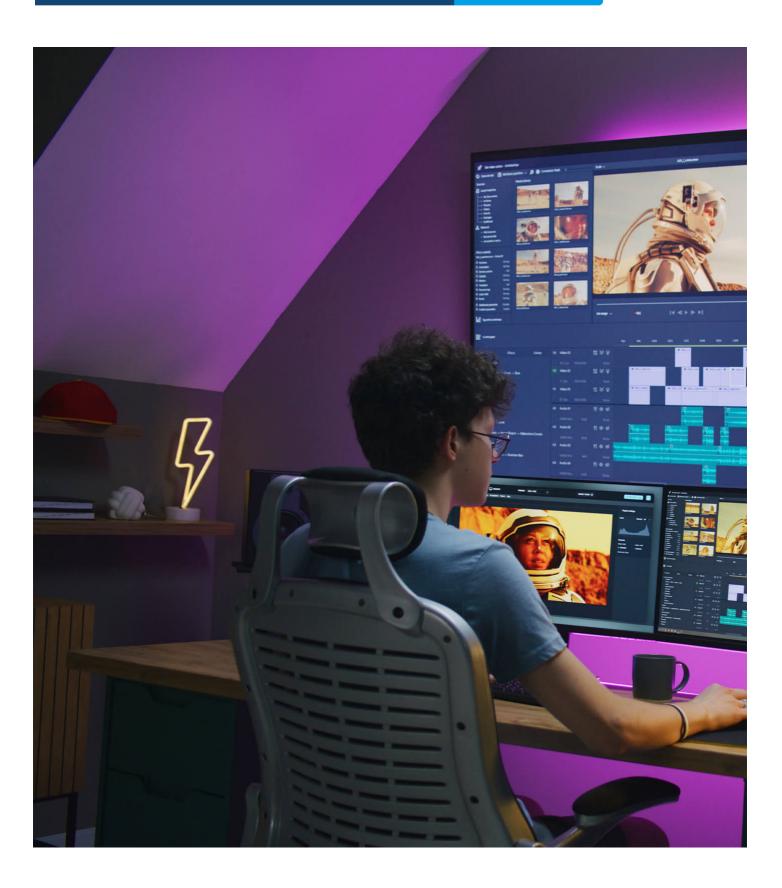



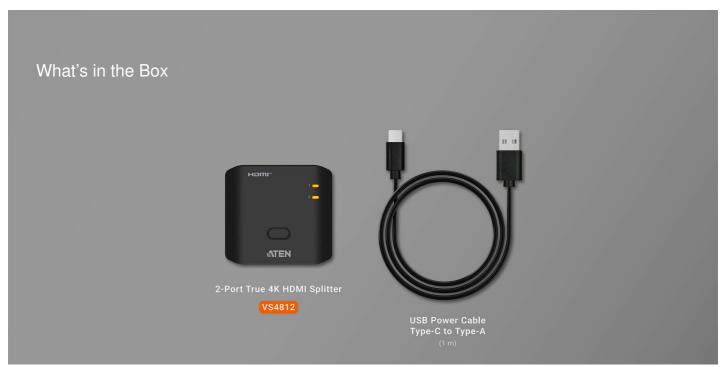

Talk to Our Experts

If you prefer to have ATEN contact you, please complete the form and a representative will be in touch with you shortly

First Name *	
Last Name *	
- Country *	_
Company *	
Email *	
Phone Number	
- Customer Type *	V
Job Title *	











18Gbps Max. Bandwidth







#### Features


- EDID Sync™ Smart Display Optimization
   Automatically optimizes resolutions and prevents display issues for flawless display presentation
- True 4K Dual-Display Sharing
   Shares one HDMI source across two True 4K displays for double the visual impact with uncompromised quality
- HDMI 3D/Deep Color, HDR10+, HDCP 2.2 Compatible
   Guarantees stable performance, broad compatibility, and superior image quality
- Master-Class Audio Immersion
   Full support for LPCM 7.1, Dolby® & DTS-HD Master Audio™ delivers theatrical-quality surround sound
- Pushbutton Output Control
   Instantly enables or disables HDMI out 2 with a press of the pushbutton for intuitive, hands-on display management
- Aesthetic Compact Form
   Slim profile and stylish accent lighting allow integration into any space, perfectly complementing your setting

#### Specifications

Specifications	
Video Input	
Interfaces	1 x HDMI Type A Female (Black)
Impedance	100 Ω
Max. Distance	3m at 3840x2160 @ 60Hz (4:4:4)
Video Output	
Interfaces	2 x HDMI Type A Female (Black)
Impedance	100 Ω
Max. Distance	3m at 3840x2160 @ 60Hz (4:4:4)
Video	
Max. Data Rate	18 Gbps (6 Gbps Per Lane)
Max. Pixel Clock	600 MHz
Compliance	HDMI (3D, Deep Color, 4K) HDCP 2.2 Compatible
Max. Resolution	3840 x 2160 @ 60Hz (4:4:4)
Audio	
Input	1 x HDMI Type A Female (Black)
Output	2 x HDMI Type A Female (Black)
Connectors	
Power	1 x USB-C (5V/1A)
LEDs	
LED Indicator	2 x Port Indicator (Orange)
Power	2 (Orange, Bottom Side)
Cable Length	
USB Cable	1 x USB Type-C to Type-A (1m)
Environmental	
Operating Temperature	0-40 °C
Storage Temperature	-20 - 60 °C
Humidity	0 - 80% RH, Non-Condensing
Physical Properties	
Housing	PC PC
Weight	0.03 kg ( 0.07 lb )
Dimensions (L x W x H)	6.10 x 56.50 x 1.52 cm (2.4 x 22.24 x 0.6 in.)
Carton Lot	20 pcs
Note	For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format.



Diagram

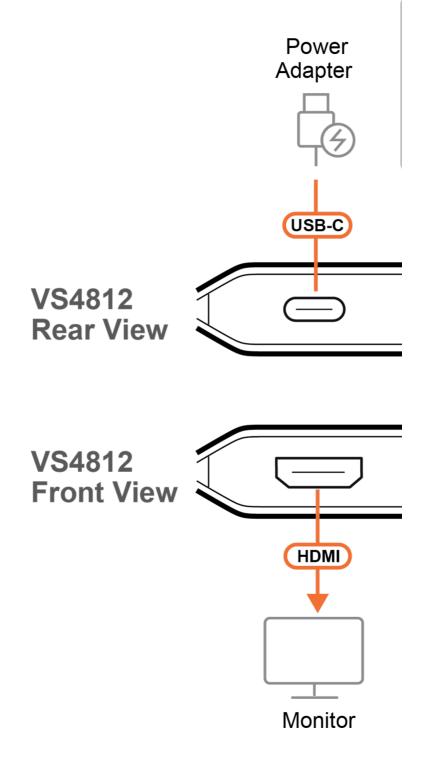



ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan Phone: 886-2-8692-6789 Fax: 886-2-8692-6767 www.aten.com E-mail: marketing@aten.com



Copyright 2015 ATEN® International Co., Ltd.
 ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.
 All rights reserved. All other trademarks are the property of their respective owners.