

## KA9140

Serial KVM Adapter



The Altusen serial CPU adapters connect [KVM cables](#) to the serial ports of the servers. Those adapters are light and in small form factor, fit perfectly into most of the rack-mount or desktop servers.


### Features

- Auto Signal Compensation (ASC), no DIP switch setting needed for the different distances.
- Hot pluggable - add or remove computers without having to power down the switch.
- Support VT-100.
- Lifetime firmware upgrades.
- Built in ASIC for greater reliability and compatibility.
- CPU module designed with automatic conversion to allow for flexible interface combinations (PS/2, USB) to control all computer types (Serial).

## Specifications

Connectors	
Console Ports	1 x RJ-45 Female 1 x Min Din Female 1 x HDB-15 Female 1 x Earphone-Jack-4 Female
Computer	1 x DB-9 Female
LEDs	
Power	1 (Orange)
Link	1 (Green)
Switches	1 x 2 way slide switch
Power Consumption	DC5V:1.60W:10BTU/h  Note: <ul style="list-style-type: none"> <li>● The measurement in Watts indicates the typical power consumption of the device with no external loading.</li> <li>● The measurement in BTU/h indicates the power consumption of the device when it is fully loaded.</li> </ul>
Environmental	
Operating Temperature	0-50°C
Storage Temperature	-20-60°C
Humidity	0-80% RH, NC
Physical Properties	
Housing	Metal
Weight	0.50 kg ( 1.1 lb )
Dimensions (L x W x H)	20.00 x 8.15 x 2.50 cm (7.87 x 3.21 x 0.98 in.)
Note	For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format.

## Diagram

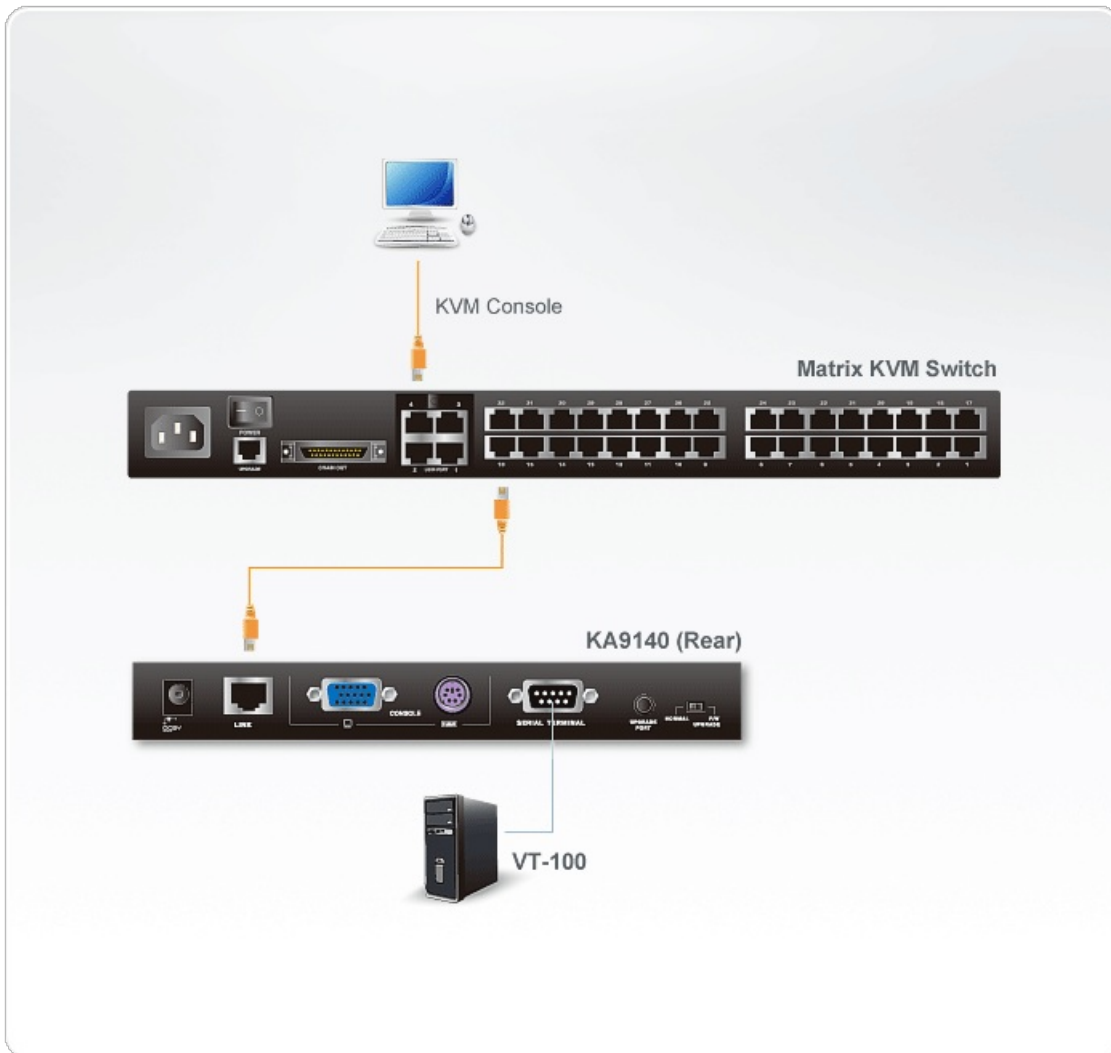

### **ATEN International Co., Ltd.**

3F, No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan  
 Phone: 886-2-8692-6789 Fax: 886-2-8692-6767  
 www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.  
 ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.  
 All rights reserved. All other trademarks are the property of their  
 respective owners.