

CS261TK

USB DVI Computer Sharing Device and Access Control Box Kit



The CS261TK offers a multi-user/single-task experience that enables two users to share the use of a computer from two consoles (monitor, USB keyboard, USB mouse, speakers and microphone).

The CS261TK is ideal for small office environments. All programs, files and resources on the connected computer can be accessed and shared by the two users without the complexity and expense of setting up a network. Users operate the computer on a one by one basis with an optional security feature that can block the video and audio of the console that is not in use.

The CS261TK provides a convenient OSD (On Screen Display) that notifies users when the other console is accessing the computer. This allows both users to know at a glance whether or not the PC is available for use.

There's an optional 2XRT-0018G KVM over IP Access Control Box provided with its package. Connecting the control box and the CS261TK allows users to enable or disable remote control privilege.



Features

- Supports Access Control Box which allows users to enable/disable remote control privilege
- Expands control of a DVI computer with shared access between two user consoles (one at a time)
- Superior video quality – supports resolutions up to 1080p, 1920 x 1200, and 4K @ 30 Hz*
- Supports 2.1 channel stereo sound and high definition audio**
- HDCP compliant – supports [HDCP](#)-enabled devices
- EDID Expert™ – selects optimum [EDID](#) settings for smooth power up, highquality display and use of the best resolution across different monitors
- Exclusive Console Modes:
 - Auto: Computer access switches to a console on a first come first serve basis
 - Manual: Computer access switches to a console using the front panel pushbutton or a hotkey
- Supports RS-232 serial commands to switch operation and configure settings
- Screen saver feature – blocks the console's display after a period of inactivity
- Mac/Sun keyboard emulation: consoles can use PC keyboards while working on Macintosh/Sun platforms***
- Multilingual keyboard mapping – supports English, Japanese, French and German keyboards
- Multiplatform support – Windows, Linux, Mac or Sun
- Upgradeable firmware to stay current with updates
- No software required – eliminates incompatibility and installation issues and the need to configure software

Note:

* 4K @ 30 Hz is supported when using a DVI to HDMI cable.

** High definition audio can be converted using a DVI to HDMI cable.


*** PC keyboard combinations emulate Mac/Sun keyboards.

Specifications

Computer Connections	1
Console Selection	Pushbutton, RS-232, Hotkey* Note: Selecting the console via hotkeys only works in Manual Mode
Connectors	
Console Ports	2 x DVI-D Female (White) 4 x USB Type A Female 2 x 3.5mm Audio Jack Female (Green) 2 x 3.5mm Audio Jack Female (Pink)
KVM Ports	1 x DVI-D Female (White) 1 x USB Type B Female 1 x 3.5mm Audio Jack Female (Green) 1 x 3.5mm Audio Jack Female (Pink)
RS-232	1 x RJ-11 Female
Power	1 x DC Jack (Black)
Switches	
Mode Selection	1 x Pushbutton
Reset	1 x Semi-recessed Pushbutton
DIP	1 x 4 pin
LEDs	
Selected	2 (Green)
Manual	1 (Orange)
Video	3840 x 2160 @ 30Hz

Power Consumption	DC5V:2.4W:20BTU
Environmental	
Operating Temperature	0-50°C
Storage Temperature	-20-60°C
Humidity	0-80% RH, Non-condensing
Physical Properties	
Housing	Metal
Weight	0.72 kg (1.59 lb)
Dimensions (L x W x H)	21.00 x 8.80 x 5.55 cm (8.27 x 3.46 x 2.19 in.)
Note	For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format.

Diagram

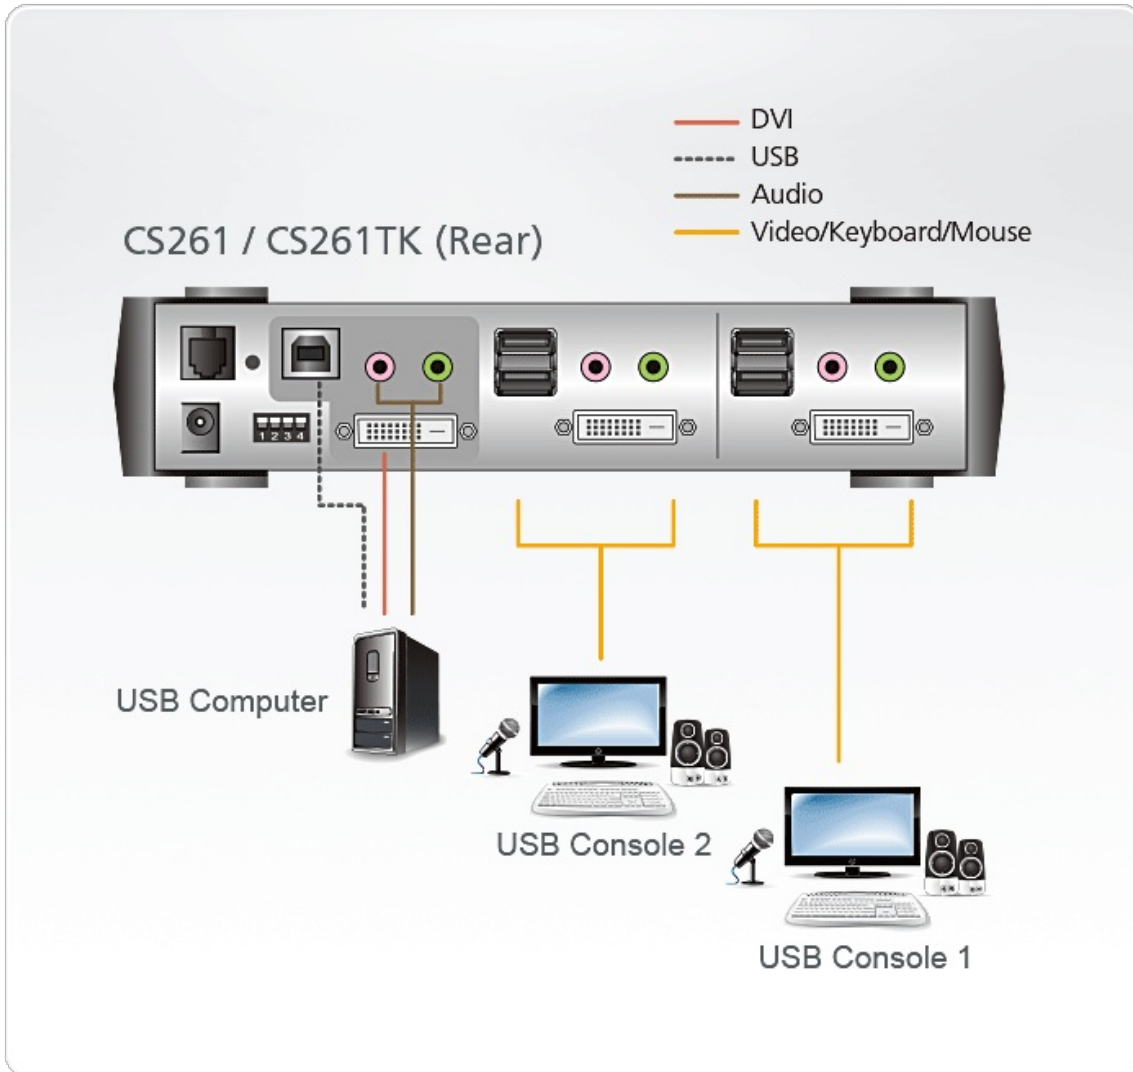

ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan
Phone: 886-2-8692-6789 Fax: 886-2-8692-6767
www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.
ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.
All rights reserved. All other trademarks are the property of their respective owners.